


Socket and spigot joint

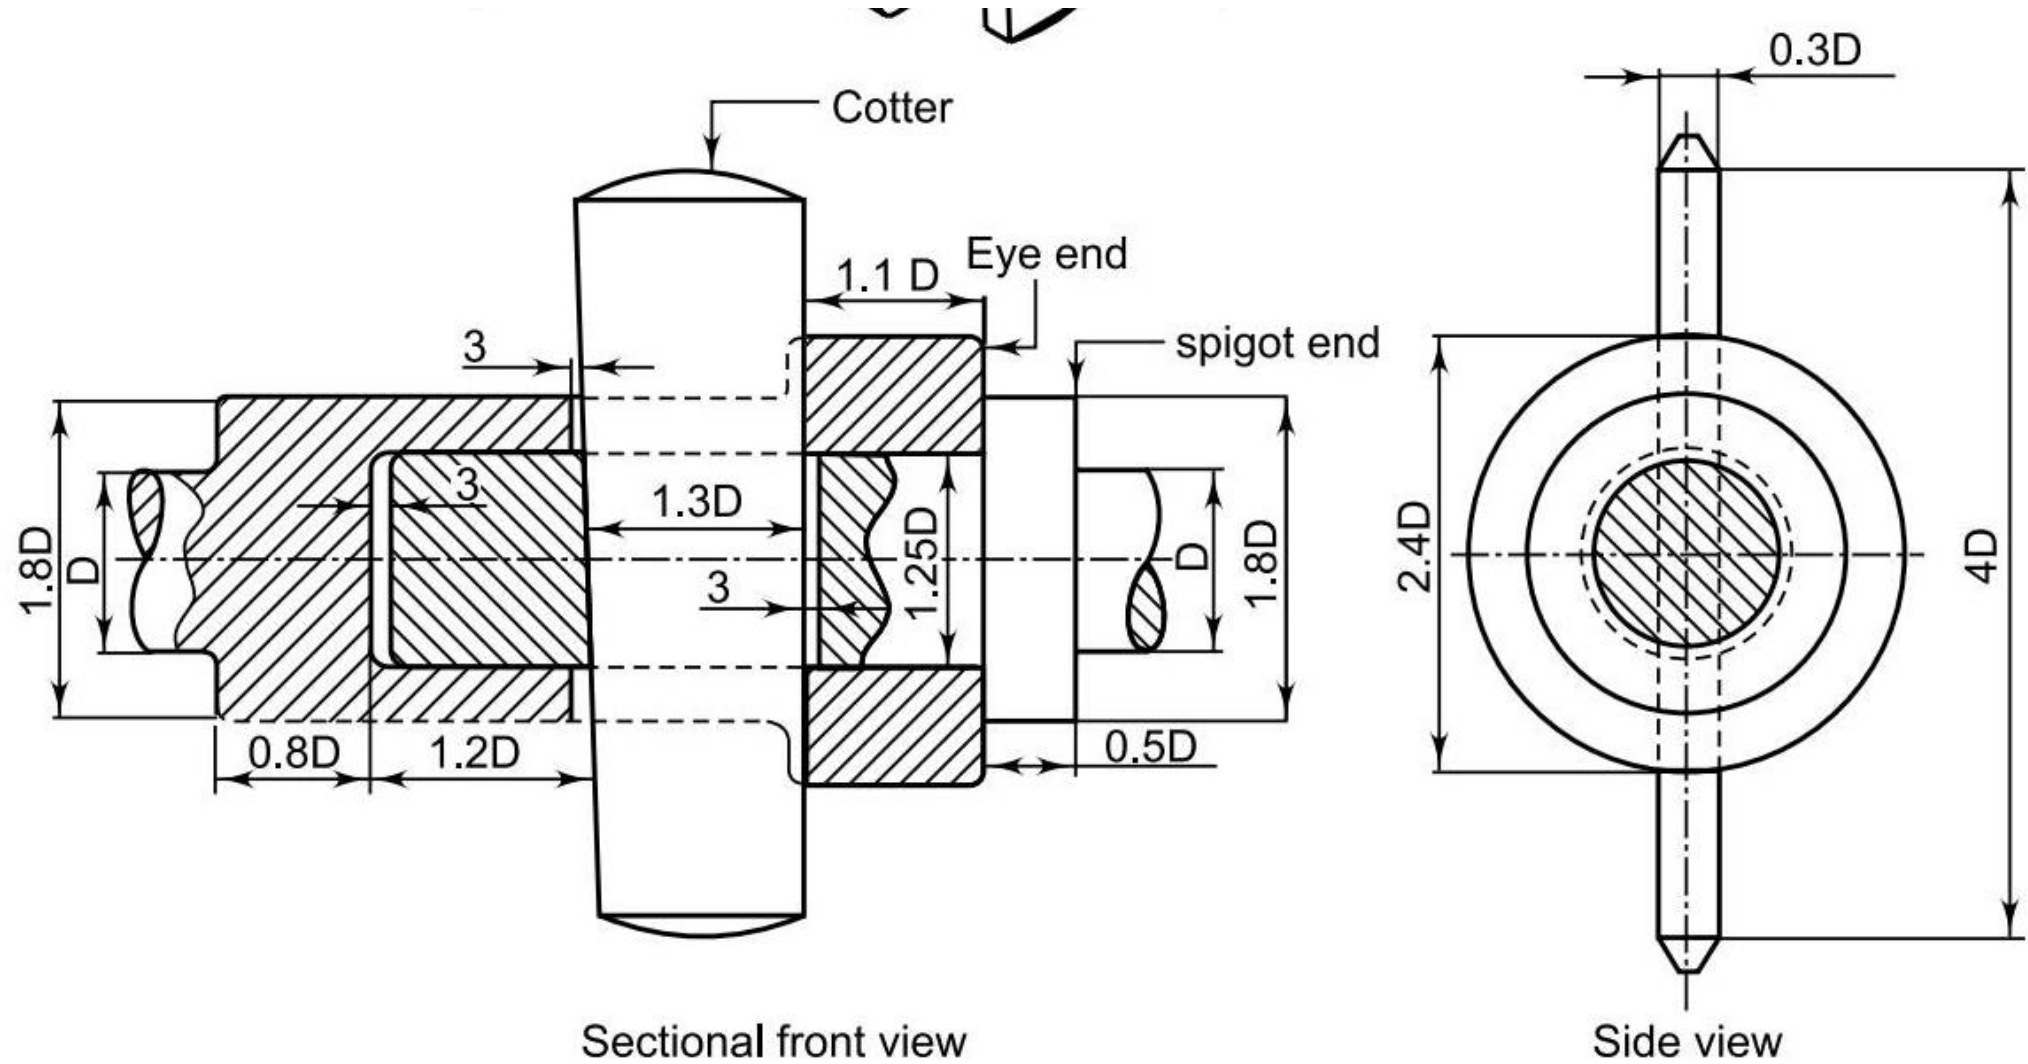

The technical drawing illustrates the design of a cotter joint, consisting of two main views: a sectional front view and a side view.

Sectional front view: This view shows the internal components and their dimensions relative to the diameter D of the rods.

- Overall length:** The total length of the assembly is $8D$.
- Outer diameter:** The diameter of the rods is $4D$.
- Inner diameter:** The diameter of the cotter is $0.1D$.
- Sectional front view details:**
 - Rod 1:** The left rod, with a diameter of $4D$.
 - Rod 2:** The right rod, with a diameter of $4D$.
 - Cotter:** The central component, with a diameter of $0.1D$.
 - Sleeve:** The outer component, with a diameter of $4D$.
 - Dimensions:**
 - Distance from the left end of the sleeve to the left end of the cotter: $1.3D$.
 - Distance from the left end of the cotter to the right end of the cotter: $1.3D$.
 - Distance from the right end of the cotter to the right end of the sleeve: $1.3D$.
 - Distance from the right end of the sleeve to the right end of the cotter: $1.3D$.
 - Distance from the right end of the cotter to the right end of the sleeve: $1.3D$.
 - Distance from the right end of the sleeve to the right end of the cotter: $1.3D$.
 - Distance from the right end of the cotter to the right end of the sleeve: $1.3D$.
 - Distance from the right end of the sleeve to the right end of the cotter: $1.3D$.

Side view: This view shows the cotter joint from the side, highlighting the taper of the cotter.

- Taper:** The cotter has a taper of $1:30$.
- Angle:** The angle of the cotter is 60° .
- Dimensions:**
 - Distance from the center of the cotter to the right end of the sleeve: $0.3D$.
 - Distance from the center of the cotter to the right end of the sleeve: $0.3D$.

