


[9] Revision History

The diagram illustrates the USB C connection for the CanSat Devboard. It shows a USB C receptacle (J4) connected to a USB C shield (S1) and a USB C connector (FB1). The shield is connected to ground (GND) and the connector is connected to VBUS. The shield also has pins for CC1, CC2, D+, D-, and SBU1, SBU2. The connector has pins for VBUS, CC1, CC2, D+, D-, and SBU1, SBU2. The shield is also connected to a USB C connector (U3) which is connected to VBUS and D+, D-.

	Comments:		Company:		Variant:	Git Hash:
			Karpát Space Program			4dd37a5
			Board Name:		Project Name:	
			CanSat Devboard		CanSat Devboard	
	Sheet Title:	File Name:	Designer:	Date:	Revision:	
	Project Architecture	USB.kicad_sch	Bertalan Nagy	2025-01-12	+ (Unreleased)	
	Sheet Path:		Reviewer:	Size:	Sheet:	
	/Project Architecture/USB/			A4	9 of 9	

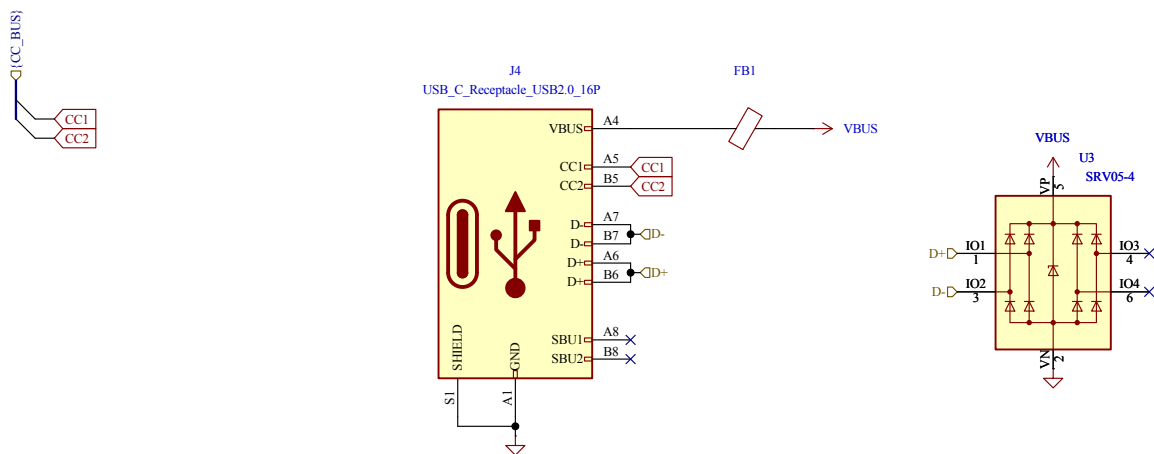

	Comments:	Company: Karpat Space Program		Variant:	Git Hash: 4dd37a5	
		Board Name: CanSat Devboard		Project Name: Cansat Devboard		
	Sheet Title: Project Architecture	File Name: USB.kicad_sch	Designer: Bertalan Nagy	Date: 2025-01-12	Revision: + (Unreleased)	
	Sheet Path: /Project Architecture/USB/		Reviewer:	Size: A4	Sheet: 9 of 9	