3DM-CX5-25
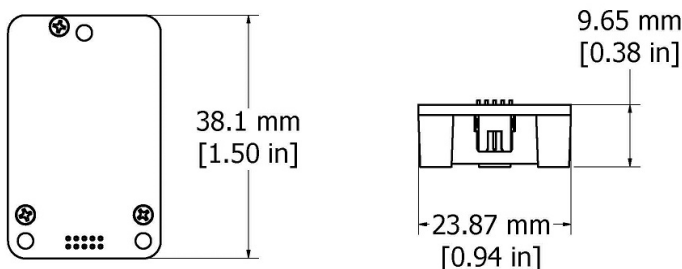## Attitude and Heading Reference System (AHRS)

The **LORD Sensing 3DM-CX5** family of high-performance, industrial-grade, board-level inertial sensors provides a wide range of triaxial inertial measurements, computed attitude, and navigation solutions.

The 3DM-CX5-25 is the smallest and lightest industrial AHRS with an Adaptive Kalman Filter available. It features a triaxial accelerometer, gyroscope, magnetometer, and temperature sensors to achieve the optimum combination of measurement qualities. The dual on-board processors run a new Auto-Adaptive Extended Kalman Filter (EKF) for outstanding dynamic attitude estimates, making it ideal for a wide range of applications, including platform stabilization and vehicle health and usage monitoring.

SensorConnect software is a user friendly program for device configuration. MIP Monitor (MicroStrain Internet Protocol) can also be used. Both packages provide for device configuration, live data monitoring, and recording. Alternatively, the MIP Data Communications Protocol is available for development of custom interfaces and easy OEM integration.

The sensor operates independent of computer platform, operating system, or coding language.

.PRODUCT HIGHLIGHTS

- Triaxial accelerometer, gyroscope, temperature sensors achieve the optimal combination of measurement qualities
- Dual on-board processors run a new Auto-Adaptive Extended Kalman Filter (EKF) for outstanding dynamic roll, pitch, and yaw performance

FEATURES AND BENEFITS

BEST IN CLASS PERFORMANCE

- Bias tracking, error estimation, threshold flags, and adaptive noise modeling allow for fine tuning to conditions in each application
- Accelerometer noise as low as 20 ug/√Hz
- Smallest and lightest industrial AHRS with Adaptive Kalman Filter available

EASE OF USE

- Sensor Connect enables simple device configuration, live data monitoring and recording.
- Development kit available
- The MSCL API allows easy integration with C++, Python, .NET, C#, Visual Basic, LabVIEW and MATLAB environments.
- MIP open byte level communication protocol
- Automatic magnetometer calibration and anomaly rejection eliminates the need for field calibration
- Automatically compensates for vehicle noise and vibration

COST EFFECTIVE

- Out-of-the box solution reduces development time
- Volume discounts

APPLICATIONS

- Unmanned vehicle navigation
- Robotics
- Platform stabilization, artificial horizon
- Health and usage monitoring of vehicles

9.65 mm
[0.38 in]

38.1 mm
[1.50 in]

23.87 mm
[0.94 in]

Best in Class Inertial Measurement

LORD SENSING
MicroStrain

3DM-CX5-25 Attitude and Heading Reference System (AHRS)

Specifications

General

Integrated sensors	Triaxial accelerometer, triaxial gyroscope, and temperature sensors
Data outputs	**Inertial Measurement Unit (IMU) outputs:** acceleration, angular rate, magnetic field, ambient pressure, Delta-theta, Delta-velocity **Computed outputs** **Extended Kalman Filter (EKF):** filter status, timestamp, attitude estimates (in Euler angles, quaternion, orientation matrix), linear and compensated acceleration, bias compensated angular rate, pressure altitude, gravity-free linear acceleration, gyroscope and accelerometer bias, scale factors and uncertainties, gravity and magnetic models, and more.

Inertial Measurement Unit (IMU) Sensor Outputs

	Accelerometer	Gyroscope	Magnetometer
Measurement range	±8 g (standard) ±2 g, ±4 g, ±20 g, ±40 g (optional)	300°/sec (standard) ±75, ±150, ±900 (optional)	±8 Gauss
Non-linearity	±0.02% fs	±0.02% fs	±0.3% fs
Resolution	<0.1 mg	<0.003°/sec	--
Bias instability	±0.04 mg	8°/hr	--
Initial bias error	±0.002 g	±0.04°/sec	±0.003 Gauss
Scale factor stability	±0.03%	±0.05%	±0.1%
Noise density	20 µg/√Hz (2 g)	0.005°/sec/√Hz (300°/sec)	400 µGauss/√Hz
Alignment error	±0.05°	±0.05°	±0.05°
Adjustable bandwidth	225 Hz (max)	250 Hz (max)	--
Offset error over temperature	0.06% (typ)	0.04% (typ)	--
Gain error over temperature	0.03% (typ)	0.03% (typ)	--
Scale factor non-linearity (@ 25°C)	0.02% (typ) 0.06% (max)	0.02% (typ) 0.06% (max)	±0.0015 Gauss
Vibration induced noise	--	0.072°/s RMS/g RMS	--
Vibration rectification error (VRE)	0.03%	0.001°/s/g2 RMS	--
IMU filtering	Digital sigma-delta wide band anti-aliasing filter to digital averaging filter (user adjustable) scaled into physical units.		
Sampling rate	1 kHz	4 kHz	100 Hz
IMU data output rate	1 Hz to 1 kHz		

Pressure Altimeter

Range	-1800 m to 10,000 m
Resolution	< 0.1 m
Noise density	0.01 hPa RMS
Sampling rate	25 Hz

Computed Outputs

Attitude accuracy	EKF outputs: ±0.25° RMS roll and pitch, ±0.8° RMS heading (typ) CF outputs: ±0.5° RMS roll and pitch, ±1.5° RMS heading (typ)
Attitude heading range	360° about all axes
Attitude resolution	< 0.01°
Attitude repeatability	0.2° (typ)
Calculation update rate	500 Hz
Computed data output rate	EKF outputs: 1 Hz to 500 Hz CF outputs: 1 Hz to 1000 Hz

Operating Parameters

Communication	USB 2.0 (full speed) TTL serial (3.0 V dc, 9,600 bps to 921,600 bps, default 115,200)
Power source	+ 3.2 to 5.2 V dc
Power consumption	500 mW (typ)
Operating temperature	-40°C to +85°C
Mechanical shock limit	500g/1ms

Physical Specifications

Dimensions	38 mm x 24 mm x 9.7 mm
Weight	8 grams
Enclosure material	Aluminum
MTBF	400,094 hours (Telcordia method GM35C)
Regulatory compliance	ROHS, CE

Integration

Connectors	Data/power output: micro-DB9Samtec FTSH Series
Software	SensorConnect and MIP Monitor software included; Windows XP/Vista/7/8/10 compatible
Data Communications Protocol (DCP)	Protocol compatibility across GX3, GX4, RQ1, GQ4, GX5 CX5 and CV5 product families
Software development kit (SDK)	MicroStrain Communication Library (MSCL) open source license includes full documentation and sample code.
Hardware development kit	Available option

LORD SENSING
MicroStrain