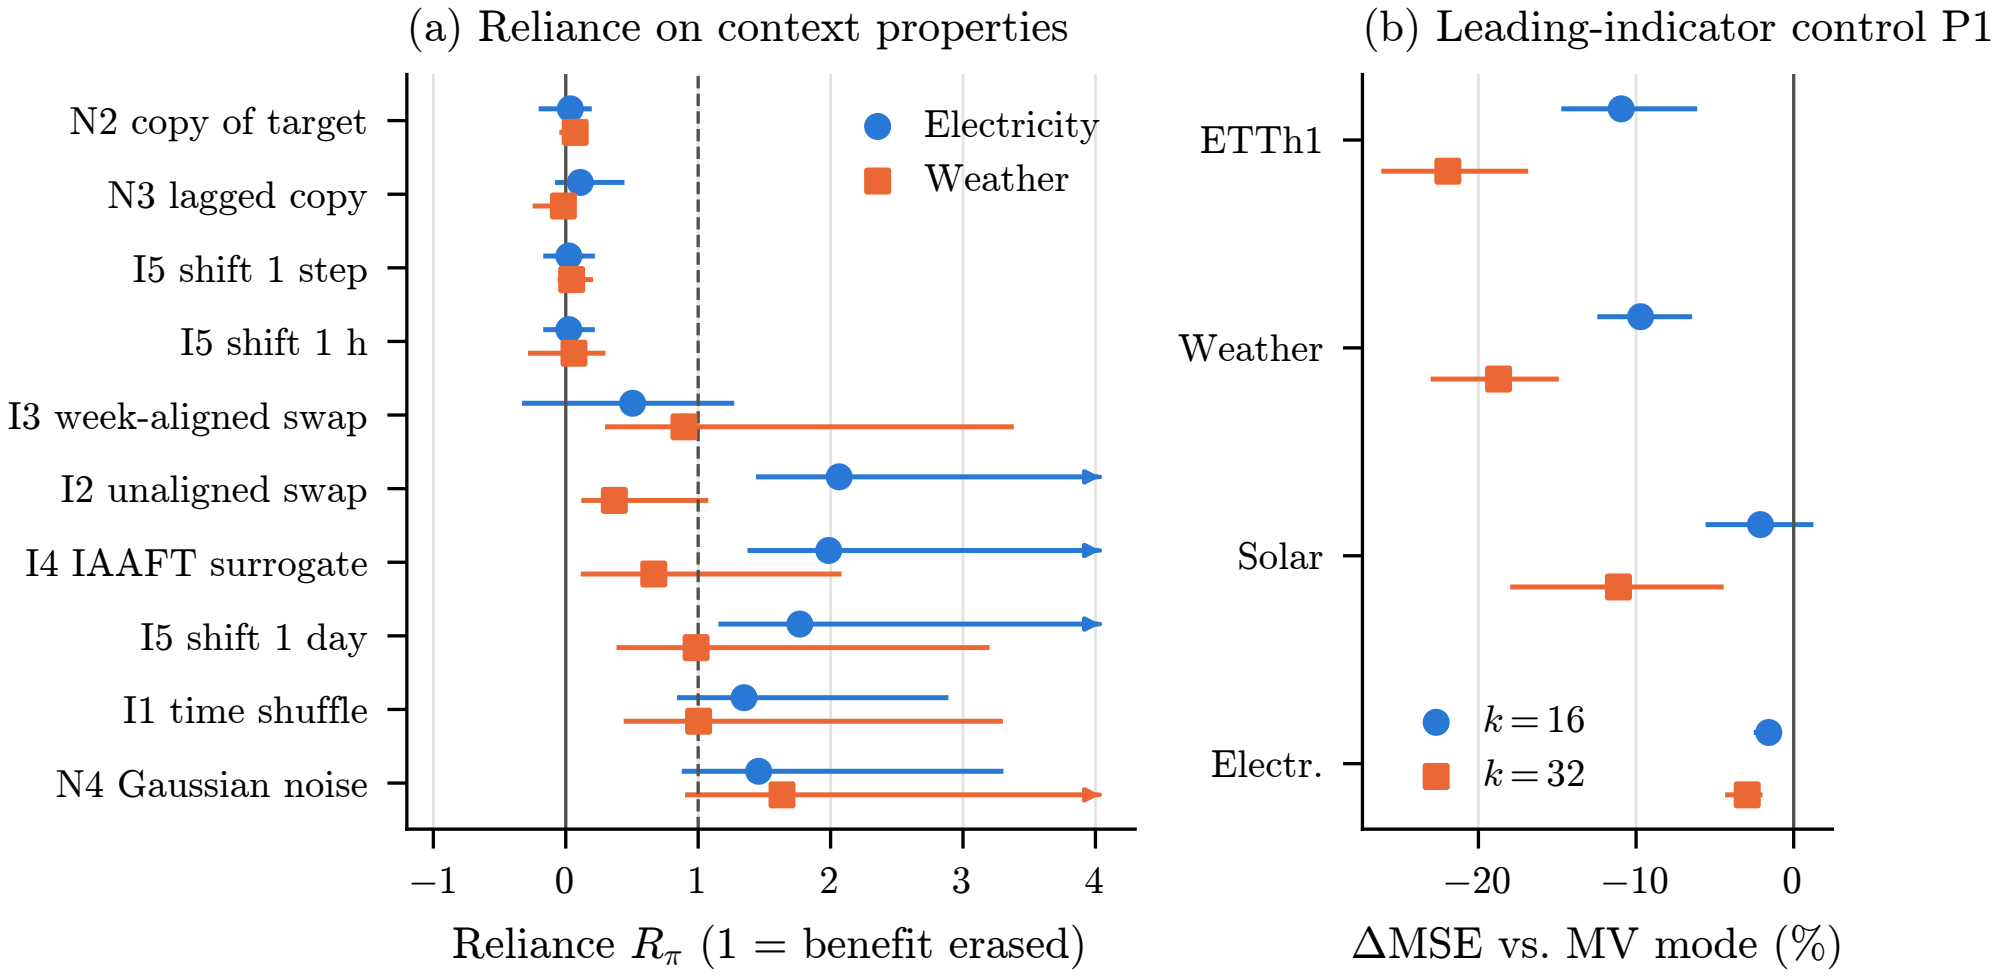
(a) Reliance on context properties
N2 copy of target
N3 lagged copy
I5 shift 1 step
I5 shift 1 h
I3 week-aligned swap
I2 unaligned swap
I4 IAAFT surrogate
I5 shift 1 day
I1 time shuffle
N4 Gaussian noise
Electricity
Weather
−1
0
1
2
3
4
Reliance R_π (1 = benefit erased)
(b) Leading-indicator control P1
ETTh1
Weather
Solar
Electr.
$k = 16$
$k = 32$
−20
−10
0
ΔMSE vs. MV mode (%)