



Fig.9: P6-P8 NIST 6061-T6 Real Data Holdout Validation


KS Distance by Method

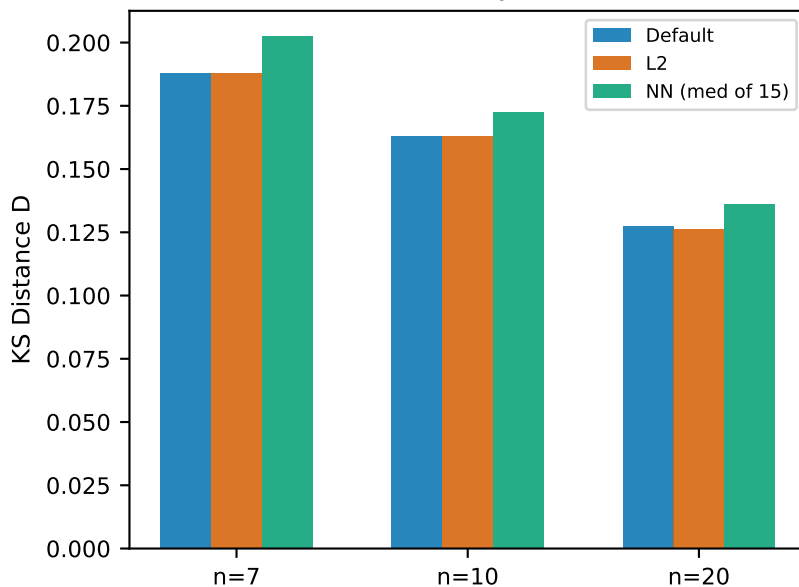

NN vs Default: 15-Model

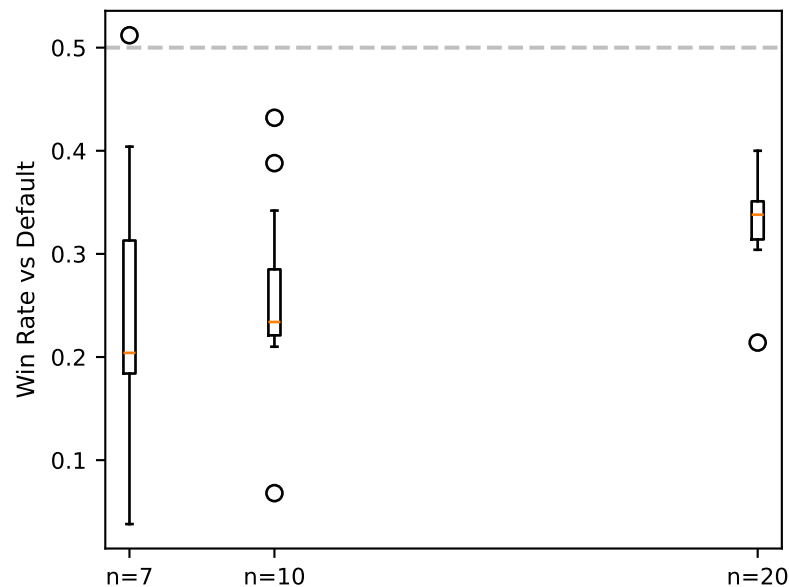

Default vs L2 Paired

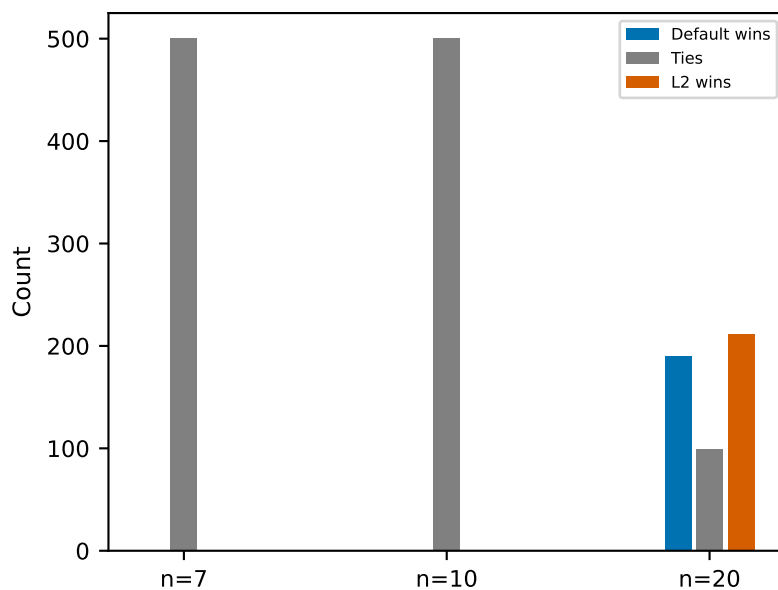

Support-Set Violation Rate

