


Watlow EZ-ZONE ST with B&B electronics
Model ULINX USOPTL4 or USPTL4
USB to RS-485 Adapter

Data format
38,400 baud
8 data bits
no parity
1 start bit
1 stop bit

Use twisted pair wires such as Cat 5 cabling.
Do not route with power carrying conductors.
Daisy chain wire up to 32 devices.

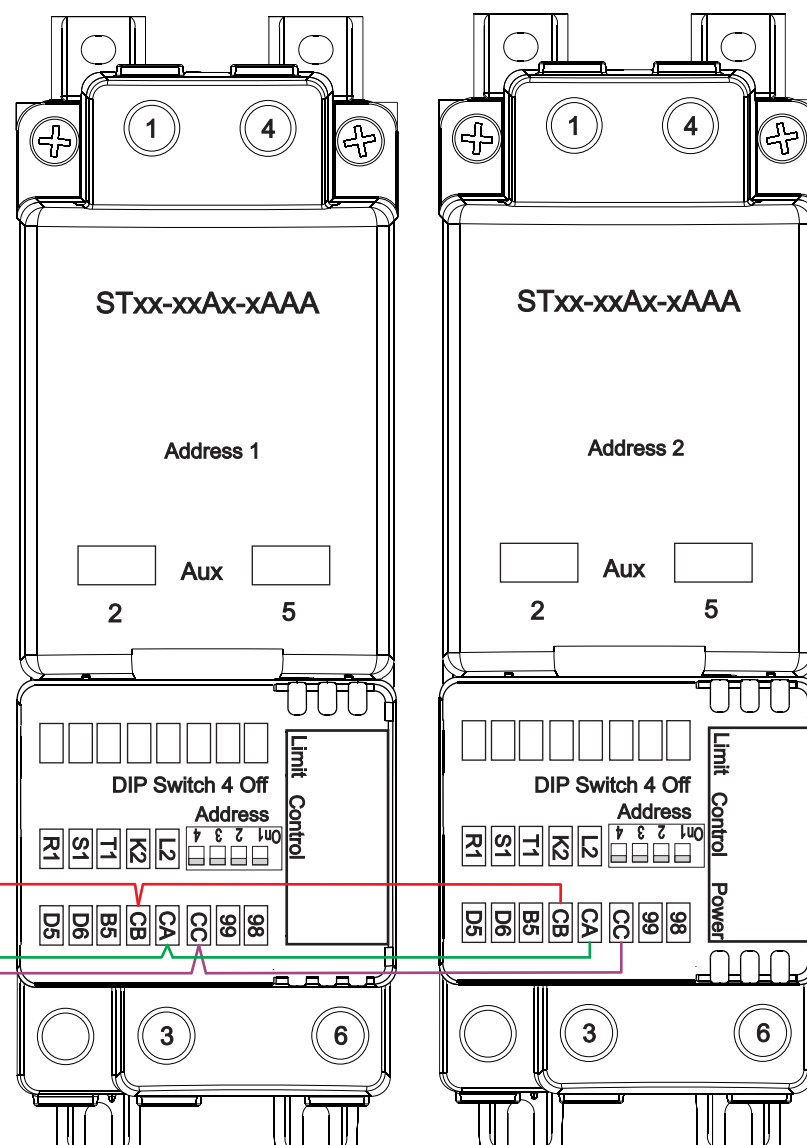

Drawing 04/02/2015
components subject to change

Example communication wiring diagram