


VPC PEERING

Class No:16

VPC Peering Overview

- **Definition:** VPC Peering allows two Virtual Private Clouds (VPCs) to connect directly using private IP addresses, enabling traffic routing between them as if they were part of the same network.
- **Purpose:**
 - To enable secure communication between workloads in different VPCs.
 - Useful for organizations that separate environments (e.g., dev, test, prod) but still need controlled connectivity.
 - Avoids exposure to the public internet.

VPC Peering architecture

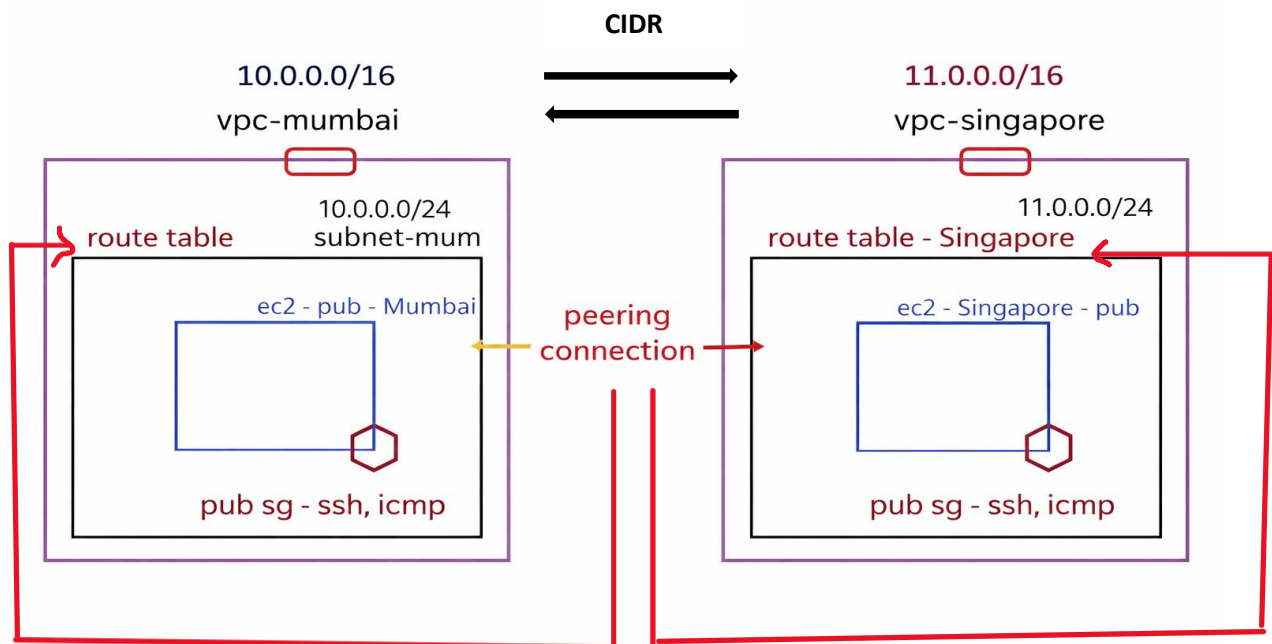

Advantages of VPC Peering

- **Low Latency & High Bandwidth:** Traffic flows directly between VPCs without traversing the public internet.
- **Security:** Communication remains private, reducing attack surface.
- **Cost Efficiency:** No need for VPN or Direct Connect for simple inter-VPC communication.
- **Simplicity:** Easy to set up compared to more complex networking solutions.
- **Cross-Account Support:** Can peer VPCs across different AWS accounts.

Limitations of VPC Peering

- **No Transitive Peering:** If VPC-A is peered with VPC-B, and VPC-B is peered with VPC-C, A cannot automatically communicate with C. Each peering must be explicitly created.
- **Route Table Management:** Requires manual updates to route tables in each VPC.
- **Scaling Issues:** Not ideal for large, complex network topologies (better suited for hub-and-spoke or small setups).
- **No Overlapping CIDR Blocks:** VPCs must have non-overlapping IP ranges.

Quick Comparison

Feature	VPC Peering	Transit Gateway
Connection Type	Point-to-point	Hub-and-spoke
Transitive Routing	✗ Not supported	✓ Supported
Best Use Case	Small setups, few VPCs	Large-scale, multi-VPC networks
Cost	Lower	Higher (but scalable)

Hands on: To connect two different VPCs from different region using VPC Peering

Step no: 1 We need to create a VPC in one region → Singapore.

Step 1.a Create VPC in Singapore Region named as: Singapore-VPC, with the CIDR of 10.0.0.0/16

Create VPC [Info](#)

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings
[Resources to create](#) [Info](#)
Creates only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional
[Info](#)
Creates a tag with a key of "Name" and a value that you specify.
Singapore-VPC

IPv4 CIDR block [Info](#)
☒ IPv4 CIDR manual input ☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

10.0.0.0/16

CIDR block size must be between /16 and /28.

IPv6 CIDR block [Info](#)
☒ No IPv6 CIDR block ☐ IPAM-allocated IPv6 CIDR block ☐ Amazon-provided IPv6 CIDR block ☐ IPv6 CIDR owned by me

Tenancy [Info](#)
Default

VPC encryption control (\$) [Info](#)
Monitor mode provides visibility into encryption status without blocking traffic. Enforce mode prevents unencrypted traffic. Additional charges apply.

☒ None ☐ Monitor mode ☐ Enforce mode

Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name

Value - optional

Q Singapore-VPC

Remove tag

Add tag

You can add 49 more tags

Cancel Preview code Create VPC

Step 1.b Create a public subnet for Singapore-VPC.

Name: Singapore-Public-Subnet

CIDR for Subnet: 10.0.0.0/24

Create Subnet.

Create subnet [Info](#)

VPC

VPC ID

Create subnets in this VPC.

vpc-065acf05147062d98 (Singapore-VPC)

Associated VPC CIDRs

IPv4 CIDRs

10.0.0.0/16

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name

Create a tag with a key of 'Name' and a value that you specify.

Singapore-Public-Subnet

The name can be up to 256 characters long.

Availability Zone [Info](#)

Choose the zone in which your subnet will reside, or let Amazon choose one for you.

Asia Pacific (Singapore) / apse1-az2 (ap-southeast-1a)

IPv4 VPC CIDR block [Info](#)

Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

10.0.0.0/16

IPv4 subnet CIDR block

10.0.0.0/24

256 IPs

Tags - optional

Key

Q Name

Value - optional

Q Singapore-Public-Subnet

Remove

Add new tag

You can add 49 more tags.

Remove

Add new subnet

Cancel

Create subnet

Step no:1.c Create a Route table for the Singapore-VPC.

Name: Singapore-Route-Table

VPC: Singapore-VPC

Create route table [Info](#)

A route table specifies how packets are forwarded between the subnets within your VPC, the internet, and your VPN connection.

Route table settings

Name - optional

Create a tag with a key of 'Name' and a value that you specify.

Singapore-Route-Table

VPC

The VPC to use for this route table.

vpc-065acf05147062d98 (Singapore-VPC)

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name

Value - optional

Q Singapore-Route-Table

Remove

Add new tag

You can add 49 more tags.

Cancel

Create route table

Step no:1.d Create an Internet gateway for the public subnet.

Name: Singapore-Igw

Create internet gateway [Info](#)

An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.

Internet gateway settings

Name tag

Creates a tag with a key of 'Name' and a value that you specify.

Singapore-Igw

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name

Value - optional

Q Singapore-Igw

Remove

Add new tag

You can add 49 more tags.

Cancel

Create internet gateway

Attach the gateway with the Singapore-VPC.

Choose the IGW → actions → attach to VPC → Singapore-VPC → attach gateway.

🟢 The following internet gateway was created: igw-Od73d8b29b46eca26 - Singapore-Igw. You can now attach to a VPC to enable the VPC to communicate with the internet.

Attach to a VPC

Notifications 0 0 2 0 0

Attach to VPC (igw-Od73d8b29b46eca26) [Info](#)

VPC

Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.

Available VPCs

Attach the internet gateway to this VPC.

Q vpc-065acf05147062d98

▶ AWS Command Line Interface command

Cancel

Attach internet gateway

Step no:1.e Create a security group for the Singapore-VPC.

Name: Singapore-sg

VPC: Singapore-VPC

Add inbound rules,

Ssh → 0.0.0.0/0

Icmp → 0.0.0.0/0

Create Security group.

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

Name cannot be edited after creation.

Description [Info](#)

VPC [Info](#)

vpc-065acf05147062d98 (Singapore-VPC)

Inbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info
SSH	TCP	22	Anywhere...	0.0.0.0/0 Delete
Custom ICMP - IPv4	All	All	Anywhere...	0.0.0.0/0 Delete

[Add rule](#)

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Outbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Destination Info	Description - optional Info
All traffic	All	All	Custom	0.0.0.0/0 Delete

[Add rule](#)

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

[Add new tag](#)

You can add up to 50 more tags.

[Cancel](#) [Create security group](#)

Step no: 2 We need to create a VPC in another region → Osaka.

Step 2.a Create VPC in Singapore Region named as: Osaka-VPC, with the CIDR of 11.0.0.0/16

VPC settings

Resources to create [Info](#)

Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional

Creates a tag with a key of 'Name' and a value that you specify.

IPv4 CIDR block [Info](#)

☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

CIDR block size must be between /16 and /28.

IPv6 CIDR block [Info](#)

☒ No IPv6 CIDR block
☐ IPAM-allocated IPv6 CIDR block
☐ Amazon-provided IPv6 CIDR block
☐ IPv6 CIDR owned by me

Tenancy [Info](#)

VPC encryption control (\$) [Info](#)

Monitor mode provides visibility into encryption status without blocking traffic. Enforce mode prevents unencrypted traffic. Additional charges apply.

☒ None ☐ Monitor mode
See which resources in your VPC are unencrypted but allow the creation of unencrypted resources. ☐ Enforce mode
Requires all resources, except exclusions, in your VPC to be encryption-capable and blocks creation of unencrypted resources.

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key **Value - optional** [Remove tag](#)

[Add tag](#)

You can add 49 more tags.

[Cancel](#) [Preview code](#) [Create VPC](#)

Step 2.b Create a public subnet for Osaka-VPC.

Name: Osaka-Public-Subnet

CIDR for Subnet: 11.0.0.0/24

Create Subnet.

Create subnet [Info](#)

VPC
VPC ID
Create subnets in this VPC.
vpc-0a78190c7f3df75b6 (Osaka-VPC)
Associated VPC CIDRs
IPv4 CIDRs
11.0.0.0/16

Subnet settings
Specify the CIDR blocks and Availability Zone for the subnet.
Subnet 1 of 1
Subnet name
Create a tag with a key of 'Name' and a value that you specify.
Osaka-Public-Subnet
The name can be up to 256 characters long.
Availability Zone [Info](#)
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
Asia Pacific (Osaka) / apne3-az3 (ap-northeast-3a)
IPv4 VPC CIDR block [Info](#)
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
11.0.0.0/16
IPv4 subnet CIDR block
11.0.0.0/24 256 IPs
Tags - optional

Key	Value - optional	
Q Name	Q Osaka-Public-Subnet	Remove

[Add new tag](#)
You can add 49 more tags.
[Remove](#)
[Add new subnet](#)

[Cancel](#) [Create subnet](#)

Step no:2.c Create a Route table for the Osaka-VPC.

Name: Osaka-Route-Table

VPC: Osaka-VPC

Create route table [Info](#)

A route table specifies how packets are forwarded between the subnets within your VPC, the internet, and your VPN connection.

Route table settings
Name - optional
Create a tag with a key of 'Name' and a value that you specify.
Osaka-Route-Table
VPC
The VPC to use for this route table.
vpc-0a78190c7f3df75b6 (Osaka-VPC)

Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key	Value - optional	
Q Name	Q Osaka-Route-Table	Remove

[Add new tag](#)
You can add 49 more tags.

[Cancel](#) [Create route table](#)

Step no:2.d Create an Internet gateway for the public subnet.

Name: Osaka-Igw

Create internet gateway [Info](#)

An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.

Internet gateway settings

Name tag

Creates a tag with a key of 'Name' and a value that you specify.

Osaka-Igw

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name

Value - optional

Q Osaka-Igw

Remove

Add new tag

You can add 49 more tags.

Cancel

Create internet gateway

Attach the gateway with the Osaka-VPC.

Choose the IGW → actions → attach to VPC → Osaka-VPC → attach gateway.

Attach to VPC (igw-0b2193179e80354c3) [Info](#)

VPC

Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.

Available VPCs

Attach the internet gateway to this VPC.

Q vpc-0a78190c7f3df75b6

Use: "vpc-0a78190c7f3df75b6"

vpc-0a78190c7f3df75b6 - Osaka-VPC

Cancel

Attach internet gateway

Step no:2.e Create a security group for the Osaka-VPC.

Name: Osaka-sg

VPC: Osaka-VPC

Add inbound rules,

Ssh → 0.0.0.0/0

Icmp → 0.0.0.0/0

Create Security group.

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

Osaka-sg

Name cannot be edited after creation.

Description [Info](#)

Osaka-sg

VPC [Info](#)

vpc-0a78190c7f3df75b6 (Osaka-VPC)

Inbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
SSH	TCP	22	Anywhere...	0.0.0.0/0	Delete
All ICMP - IPv4	ICMP	All	Anywhere...	0.0.0.0/0	Delete

[Add rule](#)

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Outbound rules [Info](#)

Type Info	Protocol Info	Port range Info	Destination Info	Description - optional Info	
All traffic	All	All	Custom	0.0.0.0/0	Delete

[Add rule](#)

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

[Add new tag](#)

You can add up to 50 more tags.

[Cancel](#) [Create security group](#)

Step no:3 Make subnet association for Singapore-VPC and Osaka-VPC.

Step.no:3.a Subnet association for Singapore-VPC.

Singapore-VPC → Route Table → Singapore-Route-Table → Subnet Association → choose Singapore subnet → save.

Edit subnet associations

Change which subnets are associated with this route table.

Available subnets (1/1)

Name	Subnet ID	IPv4 CIDR
☒ Singapore-Public-Subnet	subnet-08a2731541d065756	10.0.0.0/24

Selected subnets

subnet-08a2731541d065756 / Singapore-Public-Subnet

[Cancel](#) [Save associations](#)

Same page of RT → Singapore-Route-Table → Routes → Edit route → Add route → IGW: Singapore-Igw → save.

Edit routes

Destination	Target	Status	Propagated	Route Origin	
10.0.0.0/16	local	Active	No	CreateRouteTable	
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute	Remove

[Add route](#)

Use: "lgw-0d73d8b29b46eca26"

lgw-0d73d8b29b46eca26 (Singapore-Igw)

[Cancel](#) [Preview](#) [Save changes](#)

Step.no:3.b Subnet association for Osaka-VPC.

Osaka-VPC → Route Table → Osaka -Route-Table → Subnet Association → choose Osaka subnet→save.

Edit subnet associations

Change which subnets are associated with this route table.

Available subnets (1/1)

☒	Name	Subnet ID	IPv4 CIDR
☒	Osaka-Public-Subnet	subnet-0009ae9779d82a47b	11.0.0.0/24

Selected subnets

subnet-0009ae9779d82a47b / Osaka-Public-Subnet ×

Cancel Save associations

Same page of RT → Osaka-Route-Table→ Routes → Edit route → Add route → IGW: Osaka-Igw→ save.

Edit routes

Destination	Target	Status	Propagated	Route Origin
11.0.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	-	No	CreateRoute
igw-0b2193179e80354c3 × Use: "igw-0b2193179e80354c3" igw-0b2193179e80354c3 (Osaka-Igw)				

Add route Cancel Preview Save changes

Step no:4 Create two Public EC2 for Singapore-VPC and Osaka-VPC.

Step no:4.a Create a VPC in Singapore region,

Name: Singapore-EC2

OS: Amazon Linux

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name

Singapore-EC2

[Add additional tags](#)

▼ Application and OS Images (Amazon Machine Image) [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Quick Start



Amazon Machine Images (AMI)



[Browse more AMIs](#)
Including AMIs from
AWS, Marketplace and
the Community

Network settings → edit,

VPC: Singapore-VPC

Subnet: Singapore-Public-Subnet

Enable: Auto assign Public Ip address

Existing Security Group: Singapore-sg

▼ Network settings [Info](#)

VPC - required | [Info](#)

vpc-065acf05147062d98 (Singapore-VPC)
10.0.0.0/16

Subnet | [Info](#)

subnet-08a2731541d065756 Singapore-Public-Subnet
VPC: vpc-065acf05147062d98 Owner: 314383175192 Availability Zone: ap-southeast-1a (apse1-az2)
Zone type: Availability Zone IP addresses available: 251 CIDR: 10.0.0.0/24

Auto-assign public IP | [Info](#)

Enable

Firewall (security groups) | [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☐ Create security group ☒ Select existing security group

Common security groups | [Info](#)

Select security groups

Singapore-sg sg-04d718c80afafa3c5
VPC: vpc-065acf05147062d98

Security groups that you add or remove here will be added to or removed from all your network interfaces.

► **Advanced network configuration**

Launch Instance.

Step no:4.b Create a VPC in Osaka region,

Name: Osaka-EC2

OS: Amazon Linux

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)



Name
Osaka-EC2 [Add additional tags](#)

▼ Application and OS Images (Amazon Machine Image) [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Q Search our full catalog including 1000s of application and OS images

Quick Start

 Amazon Linux	 Ubuntu	 Windows	 Red Hat	 SUSE Linux	 Debian
---	---	--	--	---	---

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.1 AMI

Free tier eligible

[Browse more AMIs](#)
Including AMIs from AWS, Marketplace and the Community


Network settings → edit,

VPC: Osaka-VPC

Subnet: Osaka-Public-Subnet

Enable: Auto assign Public Ip address

Existing Security Group: Osaka-sg

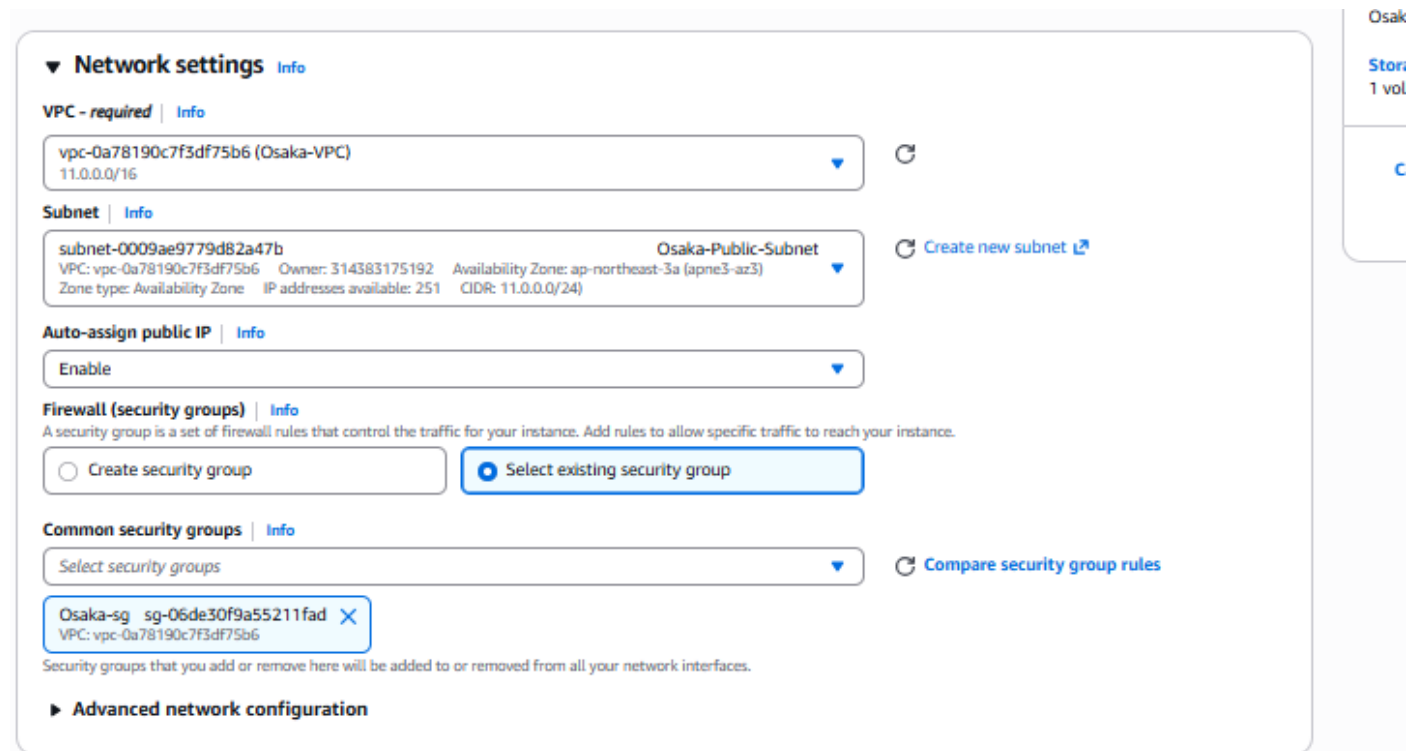

The screenshot shows the 'Network settings' panel for an AWS instance. It includes sections for VPC, Subnet, Auto-assign public IP, Firewall (security groups), and Common security groups. The VPC is set to 'vpc-0a78190c7f3df75b6 (Osaka-VPC)'. The Subnet is 'subnet-0009ae9779d82a47b Osaka-Public-Subnet'. Auto-assign public IP is set to 'Enable'. Under Firewall, 'Select existing security group' is chosen. In the Common security groups section, 'Osaka-sg sg-06de30f9a55211fad' is selected. A sidebar on the right shows 'Osaka' and 'Storage: 1 vol'.

Network settings Info

VPC - required Info

vpc-0a78190c7f3df75b6 (Osaka-VPC) 11.0.0.0/16

Subnet Info

subnet-0009ae9779d82a47b Osaka-Public-Subnet
VPC: vpc-0a78190c7f3df75b6 Owner: 314383175192 Availability Zone: ap-northeast-3a (apne3-az3)
Zone type: Availability Zone IP addresses available: 251 CIDR: 11.0.0.0/24

Auto-assign public IP Info

Enable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☐ Create security group ☒ Select existing security group

Common security groups Info

Select security groups Compare security group rules

Osaka-sg sg-06de30f9a55211fad X
VPC: vpc-0a78190c7f3df75b6

Security groups that you add or remove here will be added to or removed from all your network interfaces.

► Advanced network configuration

Launch Instance.

Step no:5 Create Peering

Step no:5.a Go to Singapore VPC → Peering Connections → Create Peering Connections,

Name: My-peering

Requestor: Singapore-VPC

Select another VPC to peer with,

Same account

Another Region: Osaka-Region (As the another VPC is in Osaka)

Osaka-VPC-ID

Send request.

Create peering connection

A VPC peering connection is a networking connection between two VPCs that enables you to route traffic between them privately. [Info](#)

Peering connection settings

Name - optional

Create a tag with a key or name and a value that you specify.

My-Peering

Select a local VPC to peer with

VPC ID (Requester)

vpc-065acf05147062d98 (Singapore-VPC)

VPC CIDRs for vpc-065acf05147062d98 (Singapore-VPC)

CIDR	Status	Status reason
10.0.0.0/16	Associated	-

Select another VPC to peer with

Account

- ☒ My account
☐ Another account

Region

- ☐ This Region (ap-southeast-1)
☒ Another Region

Asia Pacific (Osaka) (ap-northeast-3)

VPC ID (Acceptor)

vpc-0a78190c7f3df75b6

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name

Value - optional

Q My-Peering

Remove

Add new tag

You can add 49 more tags.

Cancel Create peering connection

It will be in pending acceptance until it is accepted by Osaka-VPC.

Peering connections (1) [Info](#)

Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC	Acceptor VPC	Requester CIDRs	Acceptor CIDRs	Requester owner ID	Acceptor owner ID	Requester Region	Acceptor Region
My-Peering	pcx-0d52b10dd73257e65	Pending acceptance	vpc-065acf05147062d98 / Sing...	vpc-0a78190c7f3df75b6	10.0.0.0/16	-	314383175192	314383175192	Singapore (ap-southeast-1)	Osaka (ap-northeast-3)

Step no:5.b Open Osaka-VPC → Peering Connections, We can see the “My-peering” created by the Singapore-VPC.

Click My-peering → actions → Accept the request.

Peering connection ID	Status	Requester VPC	Acceptor VPC	Requester CIDRs	Acceptor CIDRs	Requester owner ID	Acceptor owner ID	Requester Region	Acceptor Region	Expiration time
pcx-0d52b10dd73257e65	Pending acceptance	vpc-065acf05147062d98	vpc-0a78190c7f3df75b6 / Osaka-VPC	10.0.0.0/16	-	314383175192	314383175192	Singapore (ap-southeast-1)	Osaka (ap-northeast-3)	Wednesday, April 10, 2025

- Actions
- View details
 - Accept request
 - Reject request
 - Edit DNS settings
 - Manage tags
 - Delete peering connection

Accept VPC peering connection request [Info](#)

Are you sure you want to accept this VPC peering connection request? (pcx-0d52b10dd73257e65)

Requester VPC

vpc-065acf05147062d98

Acceptor CIDRs

-

Requester owner ID

314383175192(This account)

Acceptor VPC

vpc-0a78190c7f3df75b6 / Osaka-VPC

Requester Region

Singapore (ap-southeast-1)

Acceptor owner ID

314383175192(This account)

Requester CIDRs

10.0.0.0/16

Acceptor Region

Osaka (ap-northeast-3)

Cancel

Accept request

[**Note:** It will not work until we provide the configuration in routes.

The public IP address will ping in both the EC2 in different region interchangeably.

But the private IP address will not work until peering.]

Step no:6 To make Peering Connection edit routes for both Singapore-VPC and Osaka-VPC.

Step no:6.a Singapore-VPC → Route → Edit routes

Add the CIDR of the Osaka: 11.0.0.0/16

Choose: Peering Connection → Peering connection → Save changes.

Edit routes

Destination	Target	Status	Propagated	Route Origin
10.0.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
11.0.0.0/16	Peering Connection	-	No	CreateRoute

pcx-0d52b10dd73257e65
Use: "pcx-0d52b10dd73257e65"
pcx-0d52b10dd73257e65 (My-Peering)

Cancel Preview Save changes

Step no:6.b Osaka-VPC → Route → Edit routes

Add the CIDR of the Singapore: 10.0.0.0/16

Choose: Peering Connection → Peering connection → Save changes.

Edit routes

Destination	Target	Status	Propagated	Route Origin
11.0.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
10.0.0.0/16	Peering Connection	-	No	CreateRoute

pcx-0d52b10dd73257e65
Use: "pcx-0d52b10dd73257e65"
pcx-0d52b10dd73257e65

Cancel Preview Save changes

Step.no:7 Now connect the both EC2 instances.

Ping the private IP address of the Instances interchangeably. Like,

a.On Singapore Instance → ping private_ip_address_of_Osaka_Instance.

b.On Osaka Instance → ping private_ip_address_of_Singapore_Instance.

It will ping and it confirms internet connectivity.

a. On Singapore Instance → ping private_ip_address_of_Osaka_Instance

```
[ec2-user@ip-10-0-0-52 ~]$ pwd
/home/ec2-user
[ec2-user@ip-10-0-0-52 ~]$ ping 11.0.0.136
PING 11.0.0.136 (11.0.0.136) 56(84) bytes of data.
64 bytes from 11.0.0.136: icmp_seq=1 ttl=127 time=77.0 ms
64 bytes from 11.0.0.136: icmp_seq=2 ttl=127 time=77.0 ms
64 bytes from 11.0.0.136: icmp_seq=3 ttl=127 time=77.0 ms
64 bytes from 11.0.0.136: icmp_seq=4 ttl=127 time=77.0 ms
64 bytes from 11.0.0.136: icmp_seq=5 ttl=127 time=77.0 ms
^C
--- 11.0.0.136 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4004ms
rtt min/avg/max/mdev = 76.981/76.993/77.022/0.014 ms
[ec2-user@ip-10-0-0-52 ~]$
```

i-09665183158f5e0e7 (Singapore-EC2)

PublicIPs: 13.212.118.44 PrivateIPs: 10.0.0.52

b. On Osaka Instance → ping private_ip_address_of_Singapore_Instance.

```
[ec2-user@ip-11-0-0-136 ~]$ pwd
/home/ec2-user
[ec2-user@ip-11-0-0-136 ~]$ ping 10.0.0.52
PING 10.0.0.52 (10.0.0.52) 56(84) bytes of data.
64 bytes from 10.0.0.52: icmp_seq=1 ttl=127 time=77.0 ms
64 bytes from 10.0.0.52: icmp_seq=2 ttl=127 time=77.1 ms
64 bytes from 10.0.0.52: icmp_seq=3 ttl=127 time=77.0 ms
64 bytes from 10.0.0.52: icmp_seq=4 ttl=127 time=77.0 ms
64 bytes from 10.0.0.52: icmp_seq=5 ttl=127 time=77.0 ms
^C
--- 10.0.0.52 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4004ms
rtt min/avg/max/mdev = 76.982/77.016/77.080/0.036 ms
[ec2-user@ip-11-0-0-136 ~]$
```

i-0089ac3123598ed59 (Osaka-EC2)

PublicIPs: 15.168.38.218 PrivateIPs: 11.0.0.136