"MINI" AUTOMOTIVE FUSE CLIPS & HOLDERS

For .110 (2.8) × .032 (.80) MINI BLADE FUSES

For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent

VERTICAL FUSE ENTRY

Thru Hole Mount

- Low Profile



CAT. NO. 3564

MATERIAL:
.016 (.41) Brass, Matte Tin Plate
UL Current Rating: 15 Amps @ 500V AC

Mounting Detail
For Two Clips



Pad Layout
For Two Clips



AVAILABLE ON TAPE AND REEL



Surface Mount

- Low Profile

CAT. NO. 3583 (Bulk)

CAT. NO. 3583KTR (Tape & Reel)

Tape & Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (1500 pieces per reel)

SPECIFICATIONS
Material: .012 (.30) Brass
Insulator: Glass filled Nylon, UL Rated 94V-0
UL Temperature Rating: -58°F to+292°F (-50°C to+145°C)



Mounting Detail For Two Clips





CAT. NO. 3544 Tin-Nickel Plate **UL Current Rating:** 30 Amps @ 500V AC

UL Current Rating: 20 Amps @ 500V AC **CAT. NO. 3544-2*** Tin Plate

LOW PROFILE MINI FUSE HOLDER

For Littelfuse Low Profile Mini (LP) series or equivalent

- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time



SPECIFICATIONS
Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: Nylon 46, UL Rated 94V-0
UL Current Rating: 30 Amps @ 500V AC
UL Temperature Rating: -58°F to+292°F (-50°C to+145°C)

CAT. NO.	COLOR	FUSE REF.
3557-2	Black	–
3557-10	Red	10 Amp
3557-15	Blue	15 Amp
3557-20	Yellow	20 Amp

All colors UL rated for 30 Amp.

Mounting Detail





Refer to page 47 for Cat. No. 3557 Clip details

Mounting Detail



MINI FUSE HOLDER

For Littelfuse Mini 297 or 997 series/Bussmann ATM or equivalents





CAT. NO.	COLOR	FUSE REF.
3568	Black	–
3568-10	Red	10 Amp
3568-15	Blue	15 Amp
3568-20	Yellow	20 Amp

All colors UL rated for 30 Amp.

HORIZONTAL FUSE ENTRY

For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent

SPECIFICATIONS
Contacts: .012 (.30) Brass
Insulator: Nylon 6/6, UL Rated 94V-0
UL Temperature Rating: -58°F to+292°F (-50°C to+145°C)

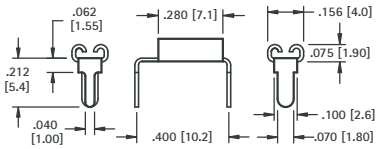

Mounting Detail For Two Clips



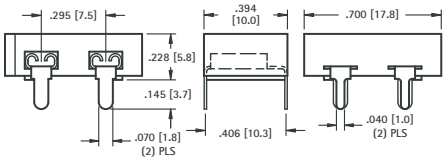

CAT. NO. 3549 Nickel Plate **UL Current Rating:** 30 Amps @ 500V AC

UL Current Rating: 20 Amps @ 500V AC **CAT. NO. 3549-2*** Tin Plate

Cat. No. 3544-2 & Cat. No. 3549-2 are not UL listed

Tel (516) 328-7500 • Fax (516) 328-1080
(800) 221-5510 • kec@keyelco.com
KEYSTONE
RoHS COMPLIANT ~ ISO 9001 CERTIFIED
www.keyelco.com
55 S. Denton Avenue, New Hyde Park, NY 11040