



[Products](#)
[Solutions](#)
[Blog](#)
[Resources](#)
[Company](#)
[Services](#)
[Contact](#)


( / )



- [Home \( / \)](#) - 
 [Products \( /products/ \)](#) - 
 [Smart LCD Display Module \( /products/smart-lcd-display-module/ \)](#)
  - [IIC Oled Display Module \( /products/iic-oled-display-module/ \)](#)
  - **[MC242 2.42 Inch IIC Oled Display Module \( /products/mc242-2.42-inch-iic-oled-display-module.html \)](#)**



# MC242 2.42 INCH IIC OLED DISPLAY MODULE

2.42" OLED monochrome screen, equipped with three monochrome displays: white, yellow, and blue. 128x64 resolution, clear display effect, high contrast. Large viewing angle: greater than 160 ° (the screen with the largest viewing angle in the display screen). Wide voltage power supply (3V~5V), compatible with 3.3V and 5V logic levels, without the need for level conversion chips. Adopting IIC bus

common connection, only 4 IO ports are needed to light up.

Equipped with an iron frame, it can effectively protect the display screen. Ultra low power consumption (much lower than TFT display screen). Provide rich example learning programs (ESP32/STM32/ Arduino/C51/CH32/RaspberryPi). Provide low-level driver technical support, and update WIKI information online. Multiple tests for module aging can meet military level standards, supporting long-term stable work.

Get a quote



Resources


Company

Services

Contact




WHTCLCD®



(Mc

2669



cont



Products

Solutions

Blog

Resources

Company

Services

Contact




## Parameters of 2.42 Inch IIC Oled Display Module

| Size (inch) | Resolution | Model | View | Interface     | Product Size (mm) | Active Area (mm) | Audio | Touch panel | Power   | OP(°C)   |
|-------------|------------|-------|------|---------------|-------------------|------------------|-------|-------------|---------|----------|
| 2.42        | 128*64     | MC242 | IPS  | IIC interface | 72.0*43.0*12.39   | 55.01*27.49      | NC    | CN          | 5V/3.3V | -20~60°C |



| Name                      | Parameter                      |
|---------------------------|--------------------------------|
| Display Screen Parameters |                                |
| Screen Size               | 2.42 inch                      |
| Screen Type               | OLED                           |
| Resolution                | 128x64 (pixels)                |
| Active Area (AA area)     | 55.01(W)x27.49(H)(mm)          |
| Display Color             | White/Blue/Yellow (Monochrome) |
| Driver IC                 | SSDI309                        |




|                                                                                                                                           |                                                                                                                                                         |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|
| <div><div><div><div></div><div>Display Interface</div></div><div><div>WHTCLOD®</div><div>Pixel Size</div></div></div><div>(/)</div></div> | <div>IIC</div> <div>0.43(H)x0.43(V)(mm)</div>                                                                                                           |  |  |  |  |  |  |  |
|                                                                                                                                           | <div><div>Products</div><div>Solutions</div><div>Blog</div><div>Resources</div><div>Company</div><div>Services</div><div>Contact</div><div></div></div> |  |  |  |  |  |  |  |
|                                                                                                                                           | <div>View Angle</div> <div>ALL 0'CLOCK</div>                                                                                                            |  |  |  |  |  |  |  |
|                                                                                                                                           | <div>Brightness(TYP)</div> <div>110(cd/m2)</div>                                                                                                        |  |  |  |  |  |  |  |
|                                                                                                                                           | <div>Operation Temperature</div> <div>-40~70(°C)</div>                                                                                                  |  |  |  |  |  |  |  |
| <div>Storage Temperature</div> <div>-40~85(°C)</div>                                                                                      |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>Size Parameters</div>                                                                                                                |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>OLED Outline Size</div> <div>60.5±0.2(W)x37.0±0.2(H)x2.0±0.1(D)(mm)(Excluding cables and adhesive backing)</div>                     |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>Module Outline Size</div> <div>72.0(W)x43.0(H)x12.39(D)(mm)(including Pin Header)</div>                                              |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>Electrical Parameters</div>                                                                                                          |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>Working Voltage</div> <div>5.0/3.3V</div>                                                                                            |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>Working Current</div> <div>52 mA(Max)</div>                                                                                          |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>Power</div> <div>0.26W(Max)</div>                                                                                                    |                                                                                                                                                         |  |  |  |  |  |  |  |
| <div>Other Parameters</div>                                                                                                               |                                                                                                                                                         |  |  |  |  |  |  |  |

|                                                                                                             |                                                 |           |      |                                                  |                                                                                     |
|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------|------|--------------------------------------------------|-------------------------------------------------------------------------------------|
| <br>SKU<br>Interface<br>(/) | MC242GW (White)/MC242GB (Blue)/MC242GY (Yellow) |           |      |                                                  |                                                                                     |
|                                                                                                             | Products                                        | Solutions | Blog | Resources                                        | Company                                                                             |
|                                                                                                             |                                                 |           |      | 5Pin 2.54mm Header (RES defaults to not welding) | Services                                                                            |
|                                                                                                             |                                                 |           |      |                                                  | Contact                                                                             |
|                                                                                                             |                                                 |           |      |                                                  |  |
| Weight(including package)                                                                                   | 23g                                             |           |      |                                                  |                                                                                     |

## Hardware Description of 2.42 Inch IIC Oled Display Module



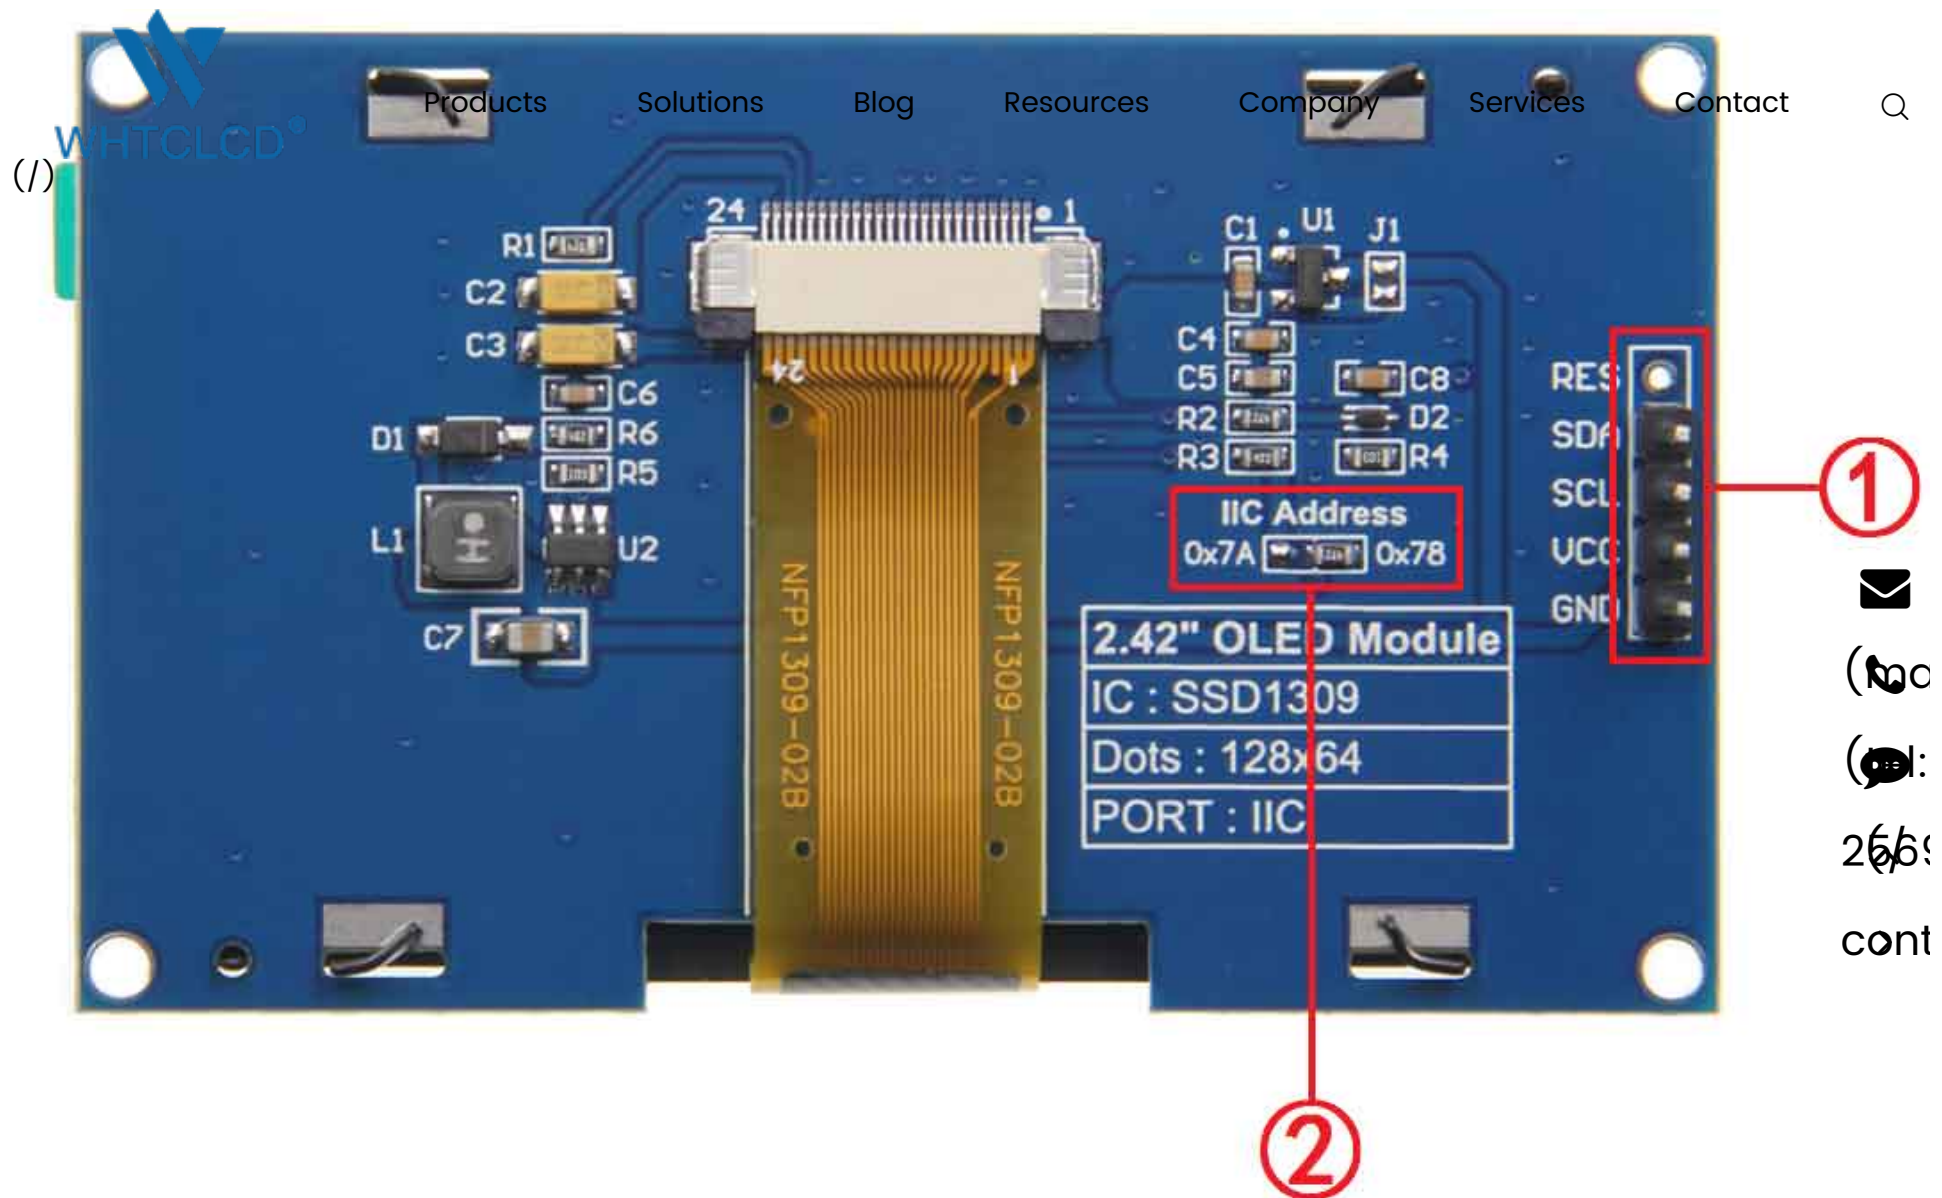

#### Interface Function Description

| Number | Interface | Function Description |
|--------|-----------|----------------------|
|--------|-----------|----------------------|

|                                                                                                                                              |                                             |                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <div><div>①</div><div></div><div>(/)</div><div>②</div></div> | 5 Pin Header                                | 2.54mm spacing row pins, module signal input pins (RES defaults to not welding)                                                     |
|                                                                                                                                              | Products   Solutions                        | Blog   Resources   Company   Services   Contact  |
|                                                                                                                                              | IIC switches resistance from device address | Solder to 0x78 ,using 0x78 slave device address<br><br>Soldered to 0x7A, using 0x7A from device address                             |

· Pin Function Description

| Number | Pin Label | Description                                                                                                                                                                                                               |
|--------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | GND       | OLED screen power supply ground                                                                                                        |
| 2      | VCC       | OLED screen power supply positive pole (connected to 5V/3.3V)                                                                          |
| 3      | SCL       | IIC bus clock signal                                                                                                                   |
| 4      | SDA       | IIC bus data signal                                                                                                                    |
| 5      | RES       | The pin arrangement is not soldered by default. If the reset function needs to be controlled in the program, it needs to be soldered  |

## Product Size of 2.42 Inch IIC Oled Display Module

touch screen controller



Products

Solutions

Blog

Resources

Company

Services

Contact



## Want to Get More Details About LCD Products?

We're waiting for your contact! Original LCD Display manufacturer, covering an area of over 2,000 square meters, with more than 10 years of industry experience. Professional R&D Team and sales team. We possess a variety of software copyrights and utility patents certificates, which can provide you with more customized solutions and SDK solutions.

The message you fill in is just to tell our sales engineers your requirements and the support you need, so that they can help you better, we will not disclose any of your information, please donot worry!



Tel:

**0755-25695467 (tel:0755-25695467)**



E-mail:

**sales@cntftlcd.com**  
**(mailto:sales@cntftlcd.com)**



Address:

2F, Building C, Banwei Garden, No. 17, Yongxiang  
East Road, Bantian Street, Shenzhen, Guangdong,

 Name\*

 Email\*

 Phone

 Country

 Message\*