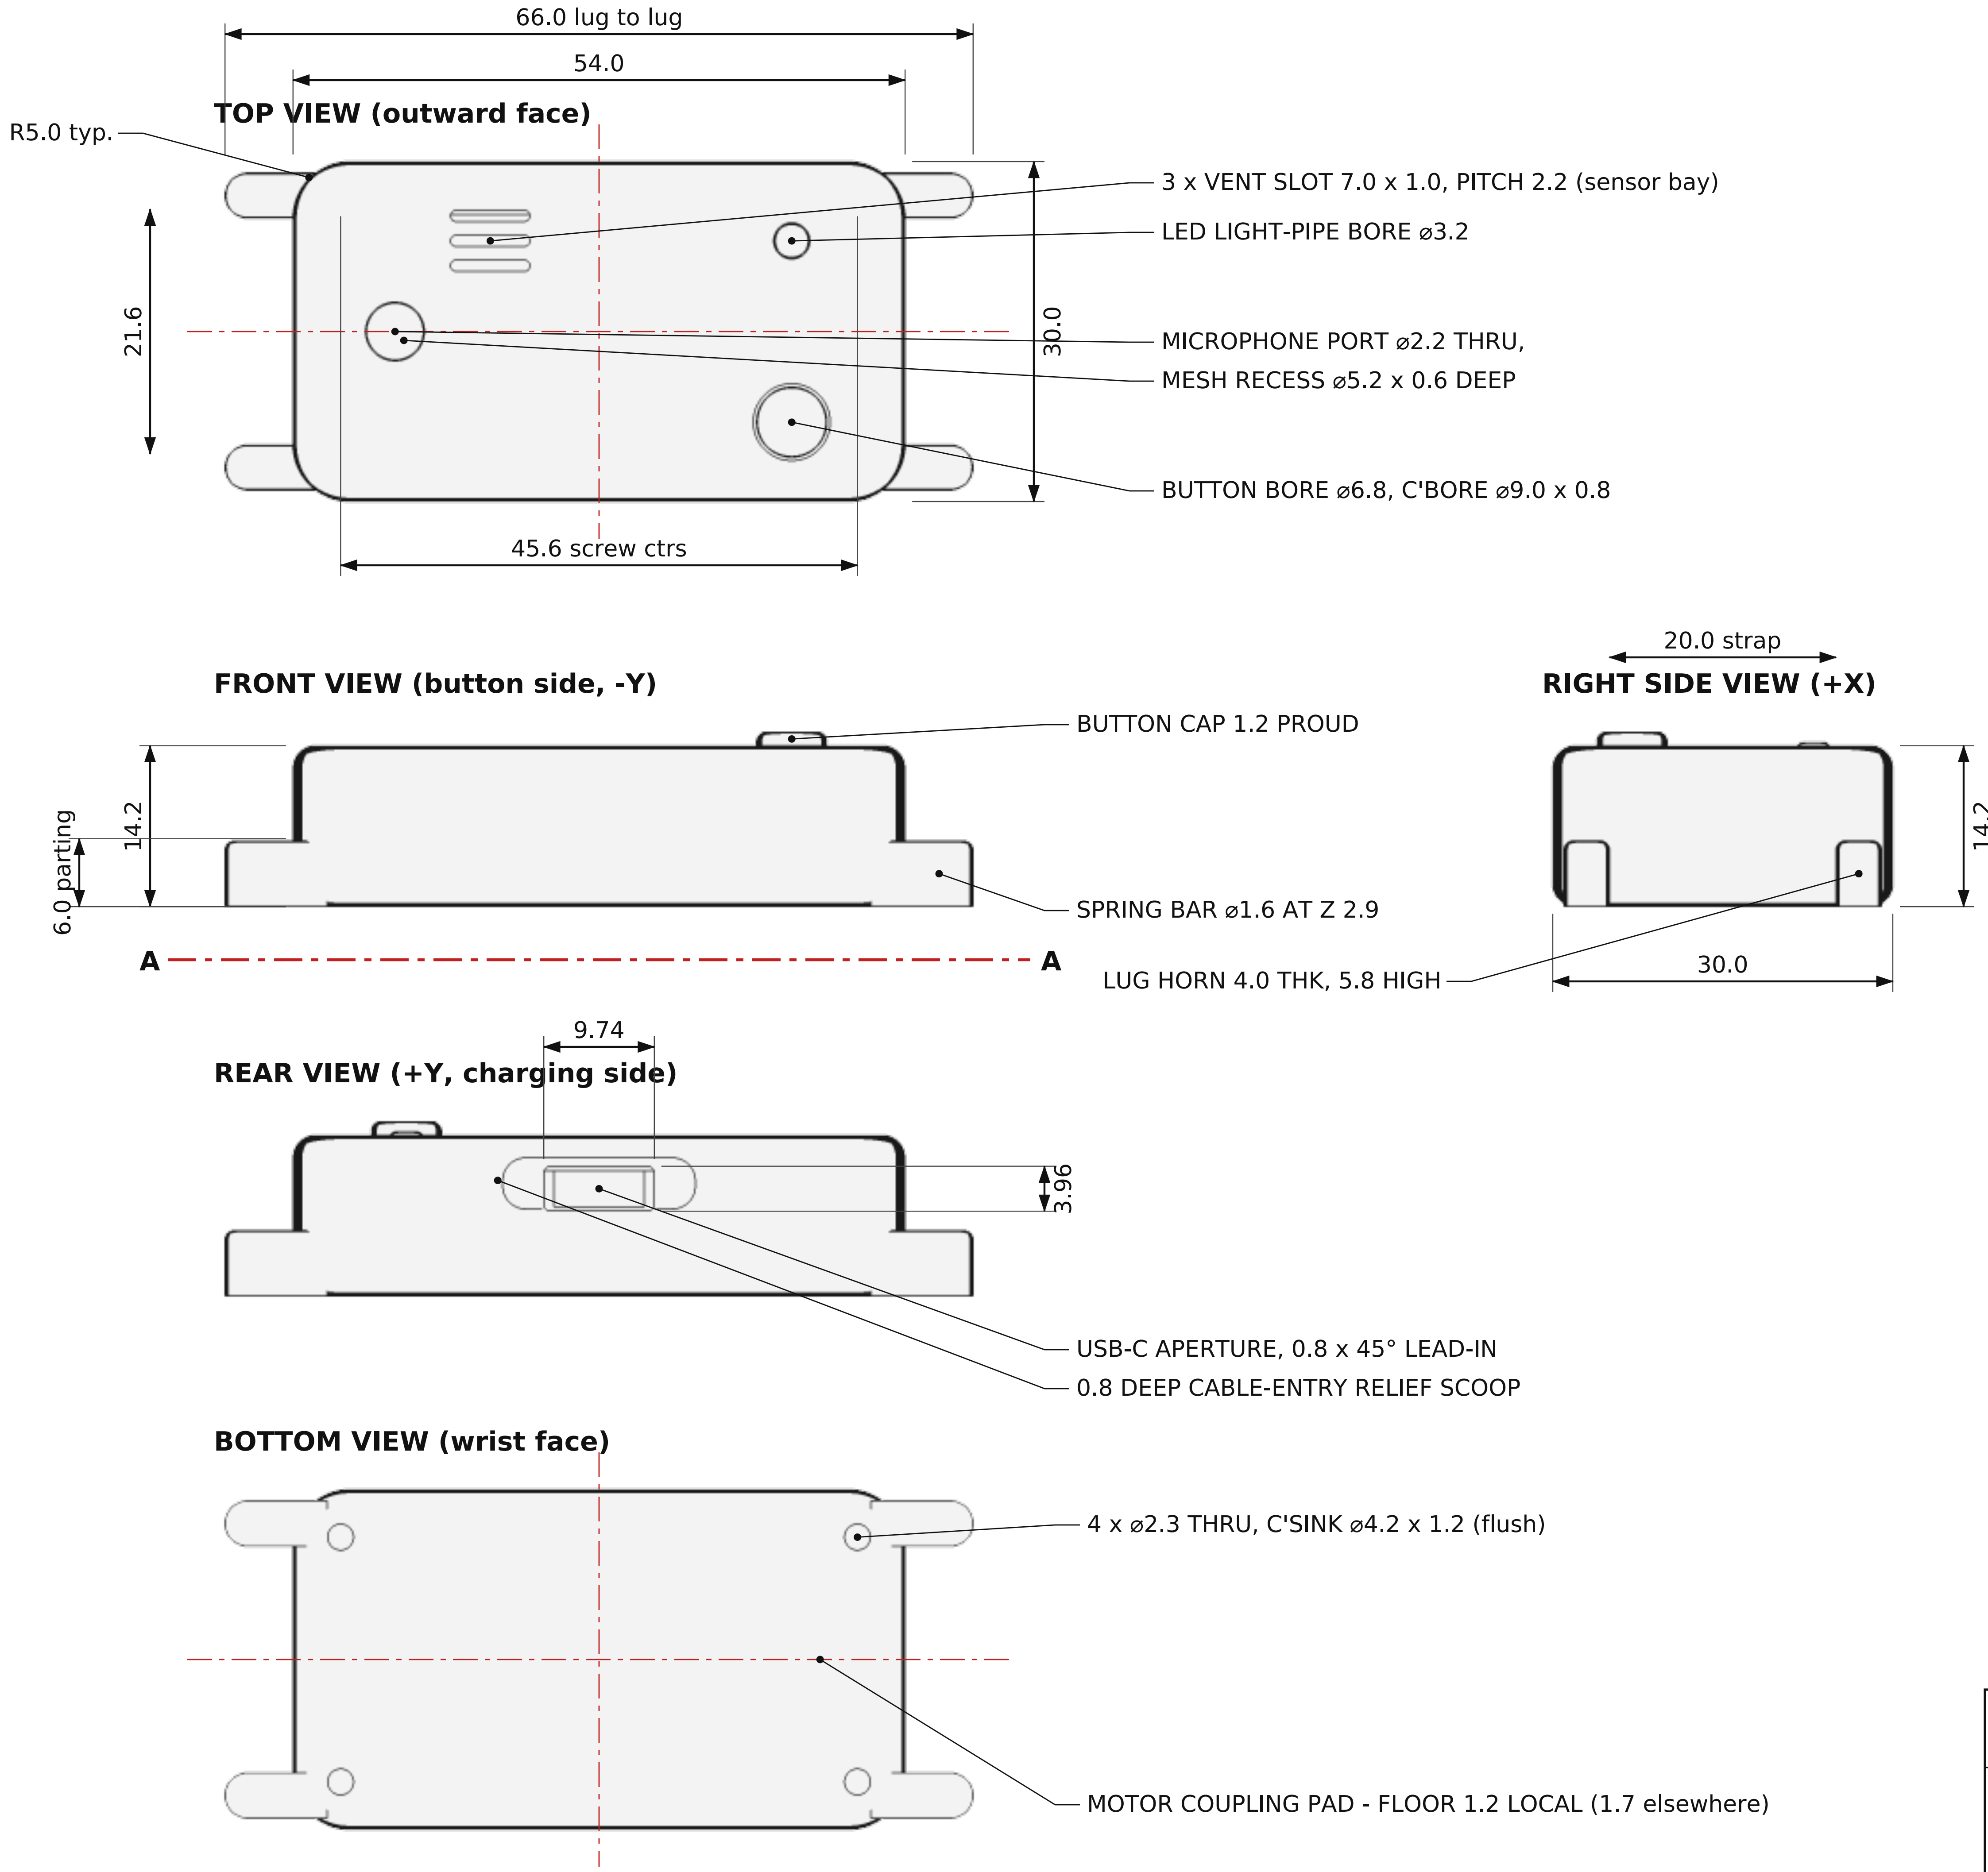


## GENERAL NOTES

1. All dimensions in millimetres. Third-angle projection.
2. Shell wall 1.8, floor 1.7, ceiling 1.8 nominal.
3. Break all outer edges R2.0 min; vertical corners R5.0.
4. Parting line at Z 6.0. Tongue 0.9 wide x 1.4 high on the bottom shell, matching groove in the top shell, 0.20 slip.
5. 4 x M2 brass heat-set inserts in the TOP shell, pilot ⌀3.20 x 4.8 deep.
6. 4 x M2 x 8 countersunk screws enter from the WRIST face and finish flush - nothing proud on the outward face.
7. Component pockets 0.4 clearance per side; moving parts 0.6.
8. Do not paint, fill or tape over the microphone port.
9. Enclosure is fully re-openable: remove 4 screws, lift the top shell straight up. No adhesive in the load path.

## PRINT SETTINGS (FDM)

Nozzle 0.4 Layer 0.16 shells / 0.20 strap Infill 35 % gyroid
Perimeters 4 Top / bottom solid layers 5
Bottom shell : wrist face DOWN on the bed - no supports
Top shell : outward face DOWN on the bed - no supports
Button cap : flange DOWN Buckle : flat, 4 perimeters
Strap (TPU 95A) : flat on the bed, 25 mm/s, no supports
Total printed mass approx. 26 g at these settings.

## KEY FITS AND CLEARANCES

| | |
|---|---|
| Tongue / groove | 0.20 total slip |
| Button cap in bore | 0.60 free (⌀6.2 in ⌀6.8) |
| Light pipe in bore | 0.20 slip (⌀3.0 in ⌀3.2) |
| Battery in fence | 0.30 per side |
| Motor in pocket | 0.30 per side |
| PCB to interior wall | 1.40 per side |
| PCB relief over boss | 0.40 per side |
| USB-C shell in aperture | 0.40 per side |
| Spring bar tip / lug bore | ⌀1.20 in ⌀1.30 |
| Battery top to PCB under | 0.20 |
| USB-C top to ceiling | 1.34 |

ISOMETRIC (enclosure only)

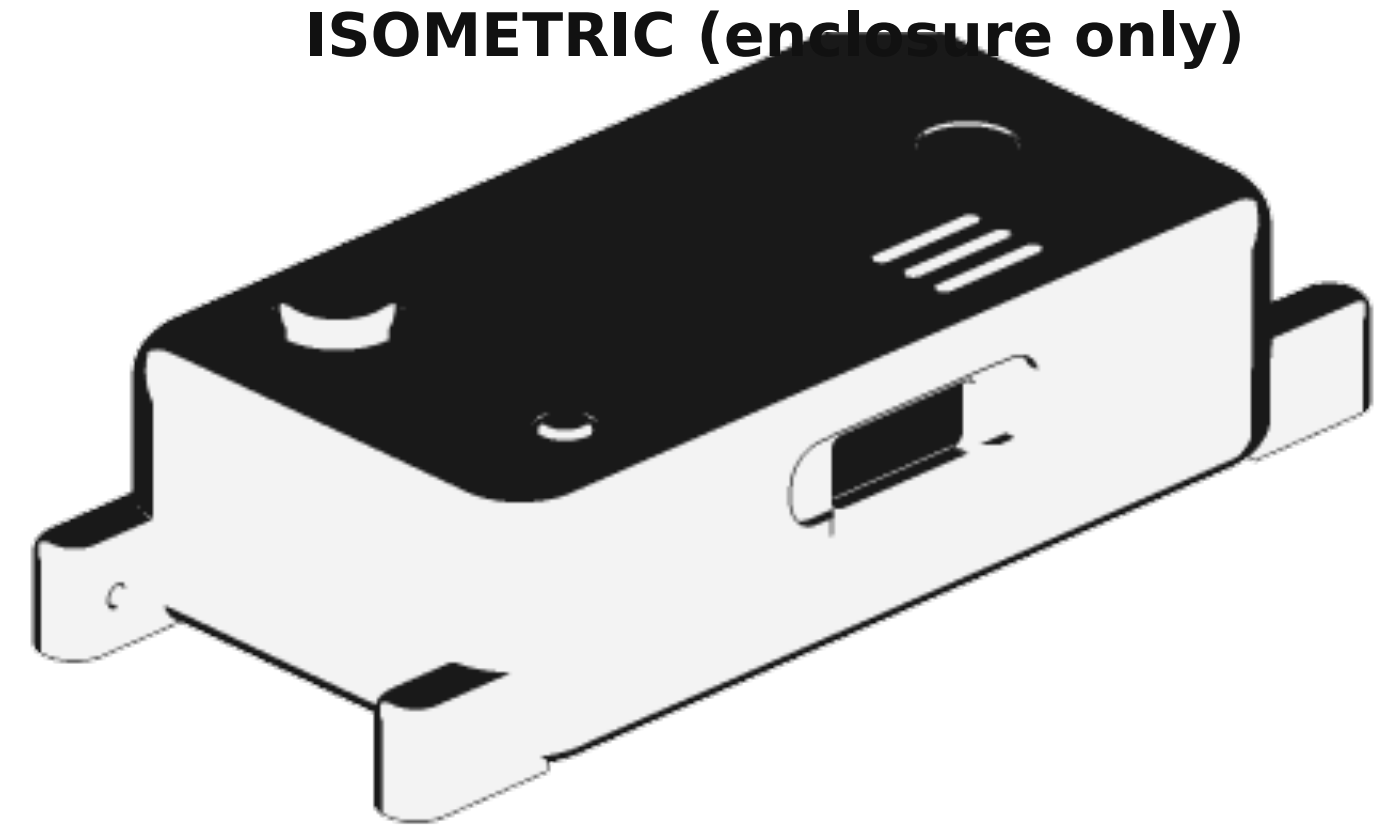

# SENSE CLIP

| | |
|---|---|
| TITLE | ENCLOSURE - GENERAL ARRANGEMENT |
| PROJECT | Sense Clip - wrist-worn assistive event sensor |
| MATERIAL | PLA / PETG (shells) TPU 95A (strap) |
| UNITS | millimetres PROJECTION third angle SCALE 1.6 : 1 |
| TOLERANCE | general +/-0.30 fits as noted FDM as-printed |
| SHEET | 1 of 2 REV A DATE 2026-08-19 |