


Architectural Design




- VN(GPIO39)
- GPIO35



GPIO34

Pin Layout

ESP32-DevKitC

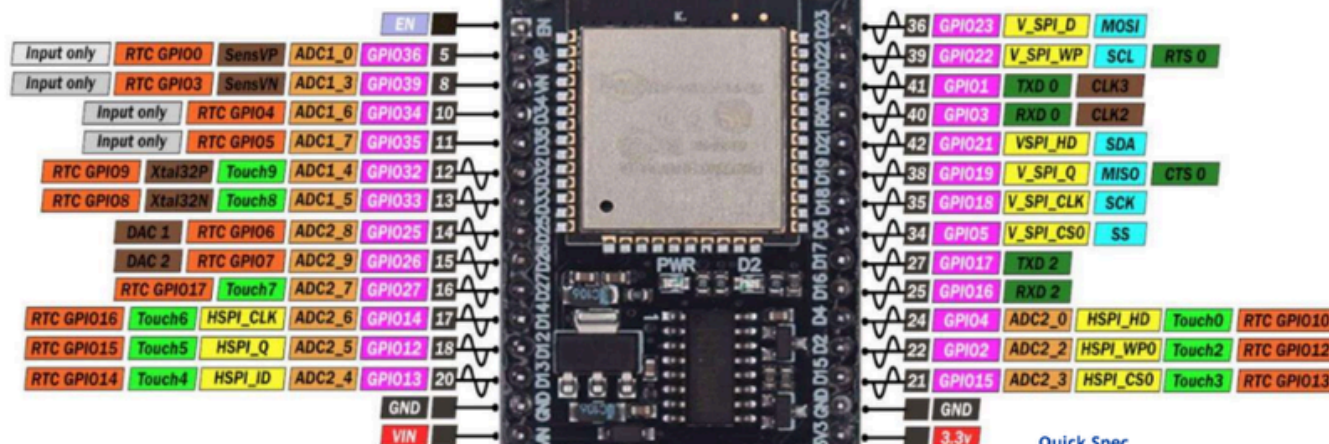

$\Delta = \text{PWM}$

ESP32 Dev Board CH340 - USB-C

This is the ESP32S-DEV development board based on ESP32-WROOM-32, features WiFi + Bluetooth connectivity, onboard USB CH340 and keys. All the I/O pins of ESP32-WROOM-32 module are accessible via the extension headers. The board has 2x15pin extension headers, which breakout all the I/O pins of the module and 2x keys, used as reset or user-defined

- Input only GPIO Input only
- GPIO32 GPIO Input and Output
- DAC 1 Digital to Analog Converter
- ADC1_0 Analog to Digital Converter
- Touch0 Touch Sensor Input Channel
- RTC GPIO0 RTC Power Domain
- GND Ground
- 3.3v Power Rails (3V3 and 5V)

Quick Spec


- Development board model: ESP32-DevKitC-32
- Module model: ESP32-WROOM-32
- Main control chip: ESP32-D0WQ6-V3 dual-core 32bit MCU integrated WiFi, Bluetooth,
- Integrated 520-kBSRAM, 448-kBROM16-kBSRAMinRTC
- External storage: 4MB
- USB driver chip: CH340C, with good system compatibility, higher download speed, and more stability.
- Support VIN external wide voltage input 5-12V power supply (battery version maximum 5.5V input) Support USB power supply, external 3.3V power supply, and VIN power supply three kinds of power supply
- Mode development board size: 52*28mm/weight about 9.5g
- Support ArduinoIDE mixly, mind+, Python and other programming software

ESP32 Dev Board CH340 - USB-C - Micro Robotics

ESP32-DevKitC Pin Layout (click to enlarge)
ESP32-DevKitC V4 Getting Started Guide

ESP32 TYPE-C USB ESP-32 Wi-Fi + Bluetooth Dual Core ESP32-DevKitC-32 ESP-WROOM - AliExpress 502

- VCC 3.3V or 5V
- GND



GPIO16

Architectural Design

