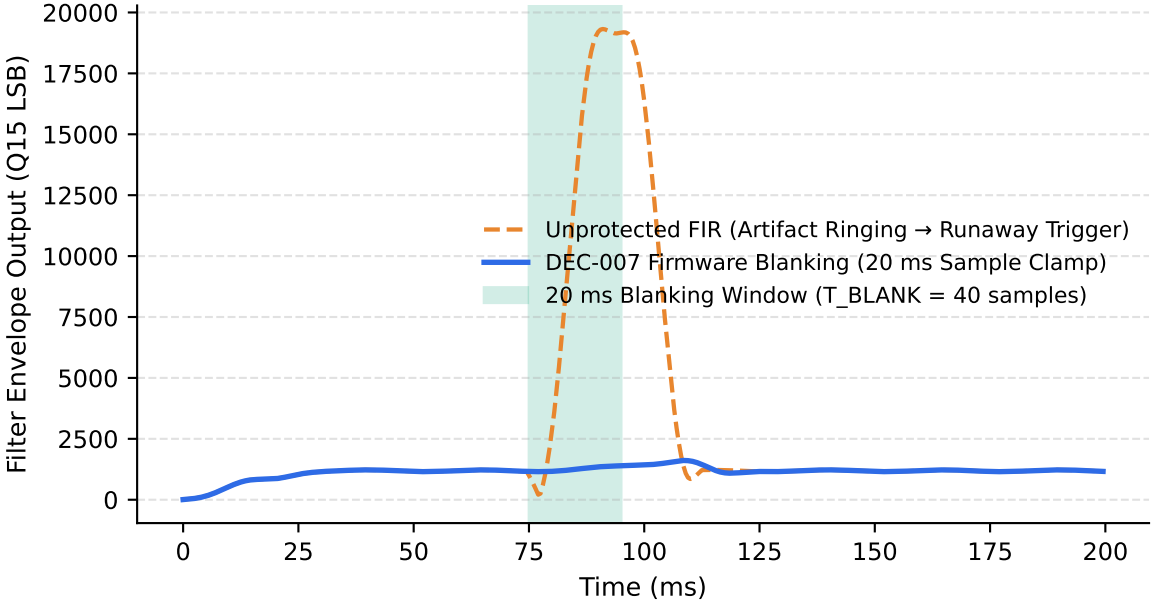Figure 6. Firmware Stimulation Artifact Blanking vs. Unprotected FIR Ringing