	Company name:
	Created by:
	Phone:
	Date: 13/01/2026

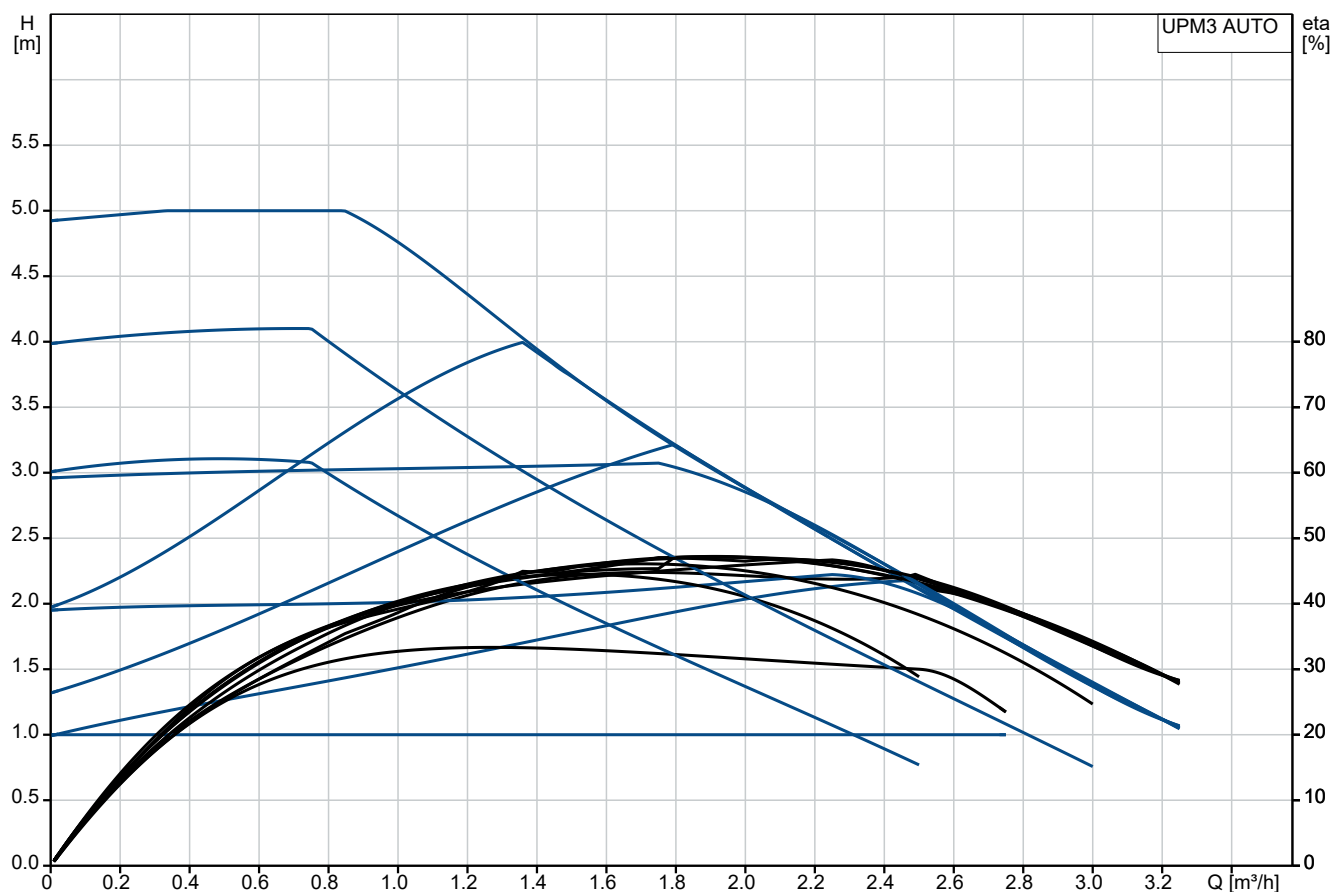| Qty.	Description
1	**UPM3 AUTO15-50 130 ZZZ**

Note! Product picture may differ from actual product
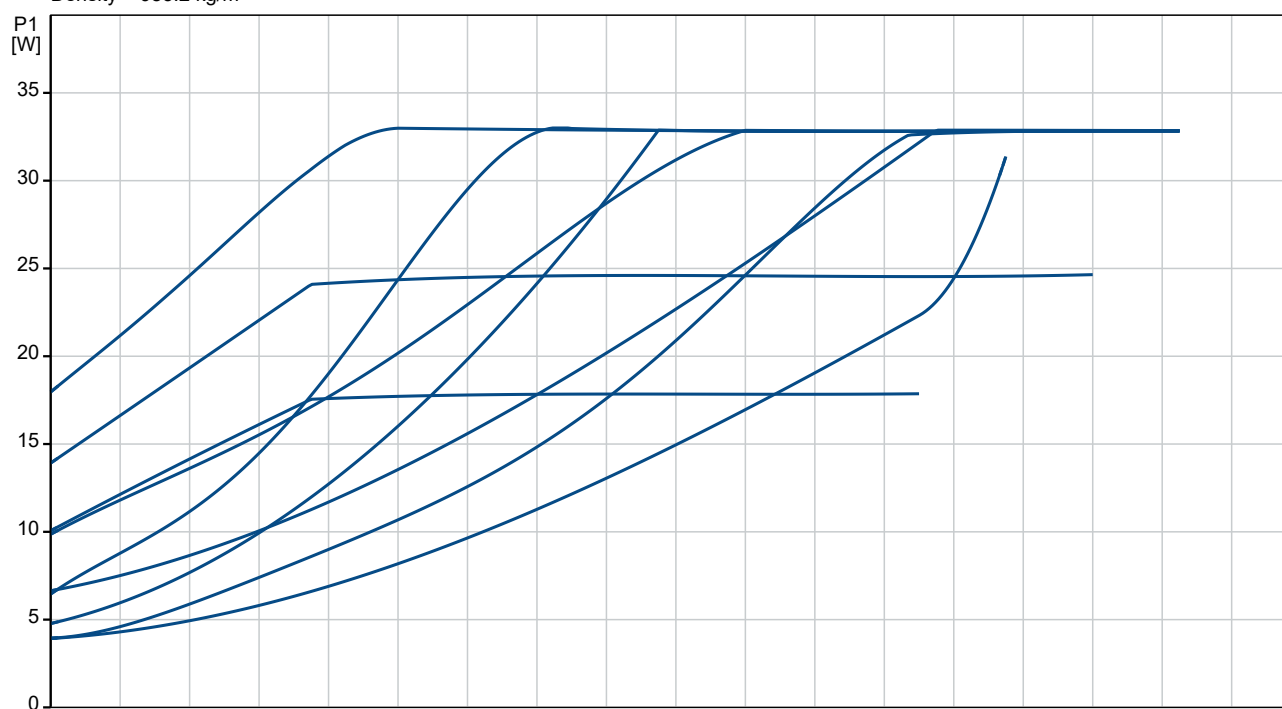
Product No.:   On request

UPM3 AUTO is an OEM high-efficiency self-controlled circulator with constant control modes and the unique AUTOADAPT mode.

The product is optimal for underfloor heating, various heating kits or integration in heating systems with constant or minor flow variations.
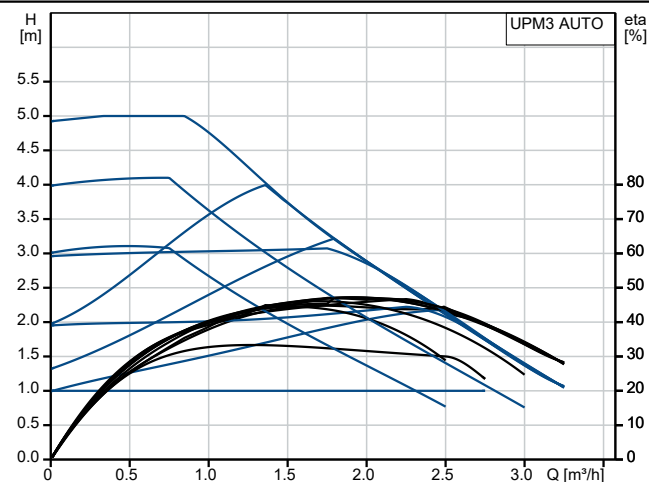
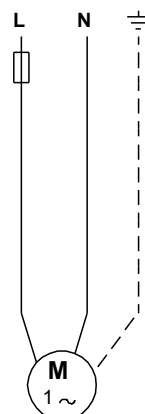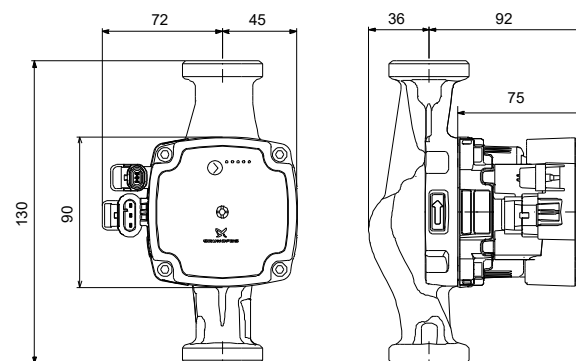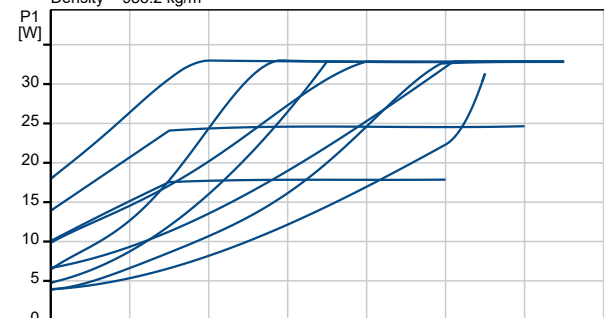# On request UPM3 AUTO 15-50 130 ZZZ

Pumped liquid = Water
Liquid temperature during operation = 60 °C
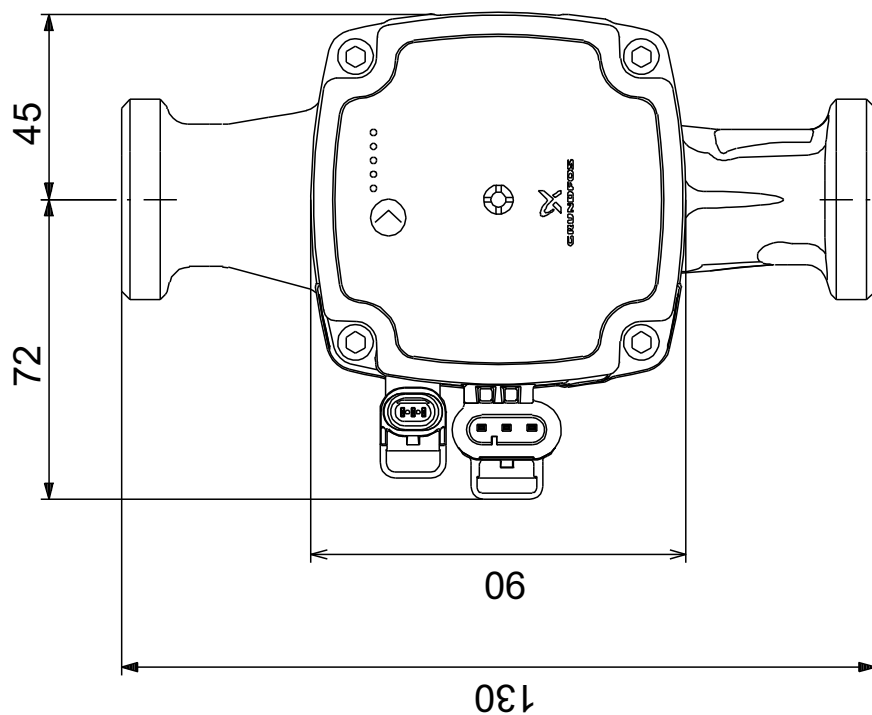Density = 983.2 kg/m³

Description	Value
General information:	
Product name:	UPM3 AUTO 15-50 130 ZZZ
Product No:	On request
EAN number:	On request
Technical:	
Maximum head:	50 dm
TF class:	110
Approvals:	CE,VDE
Model:	W
Installation:	
Maximum ambient temperature:	70 °C
Maximum operating pressure:	10 bar
Port-to-port length:	130 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	2 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Power input - P1:	4 .. 33 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 230 V
Maximum current consumption:	0.06 .. 0.36 A
Enclosure class (IEC 34-5):	IP44
Thermal protec:	ELEC
Controls:	
Terminal box position:	9H
Others:	
Energy (EEI):	0.20
Net weight:	1.82 kg
Gross weight:	2.1 kg

Pumped liquid = Water
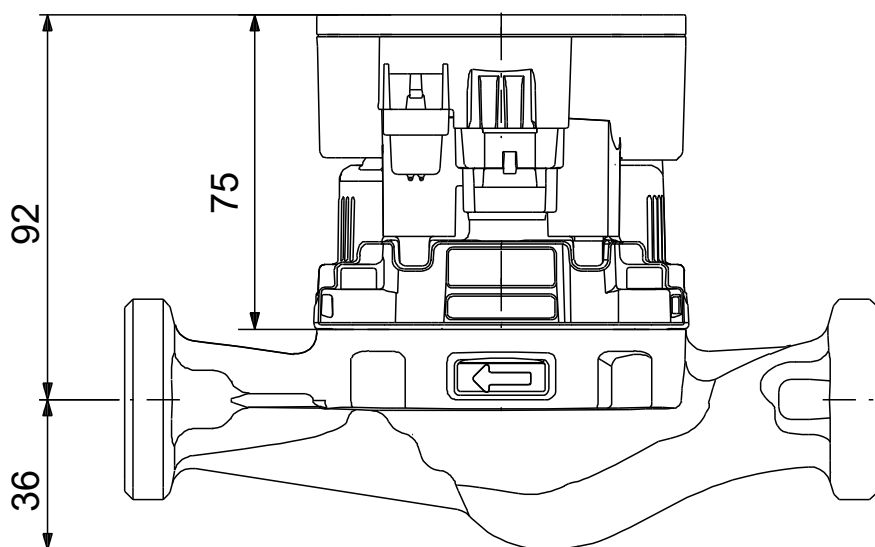Liquid temperature during operation = 60 °C
Density = 983.2 kg/m³
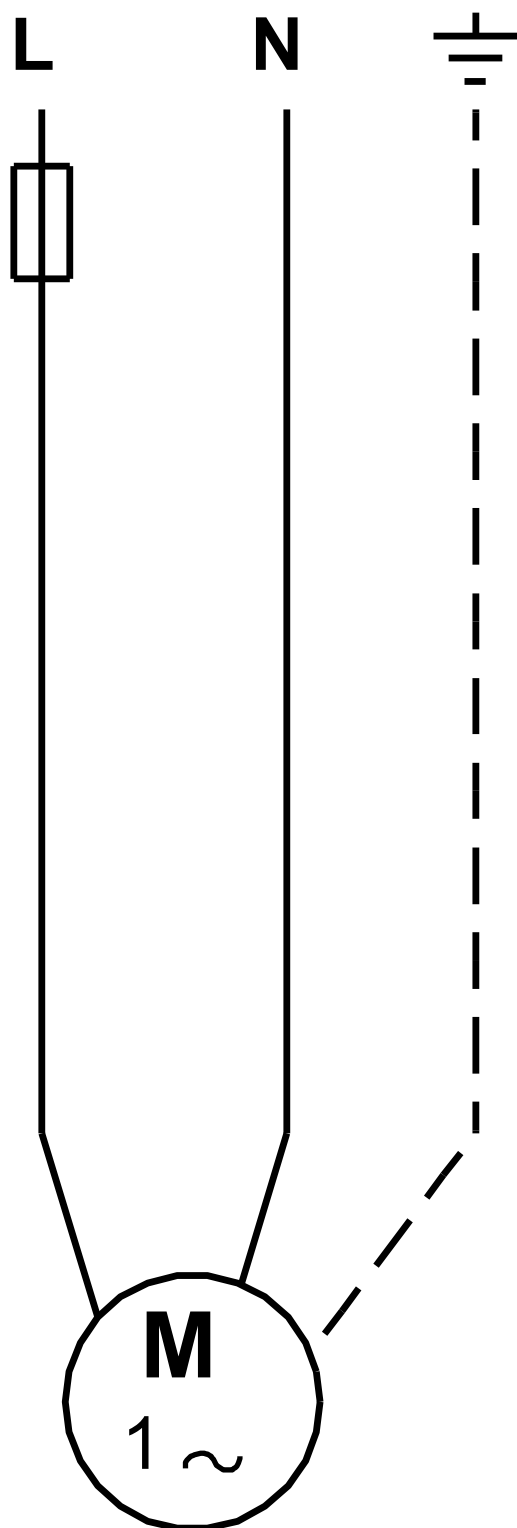
GRUNDFOS

On request UPM3 AUTO 15-50 130 ZZZ

92

75

36

45

72

06

130

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Printed from Grundfos Product Centre [2026.02.003] 4

On request UPM3 AUTO 15-50 130 ZZZ

L   N

M
1 ～

Note! All units are in [mm] unless others are stated.

GRUNDFOS

Company name:
Created by:
Phone:

Date: 13/01/2026

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		UPM3 AUTO 15-50 130 ZZZ	1	On request	