

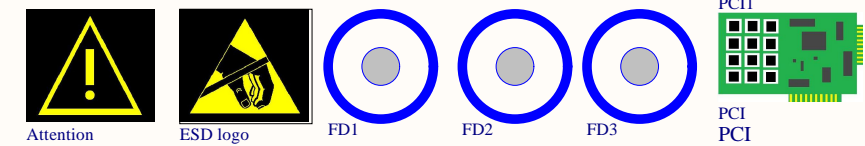


3750 Vrms - 600 Mbps  
ISOLATED EXTERNAL SpW LVDS TX DRIVERS


Default: resistors: 0402 - 5%  
Default: caps: cer. 0402 - X5R/X7R - 16V/25V  
10 uF caps: cer. 0603 - X5R/X7R - 25V

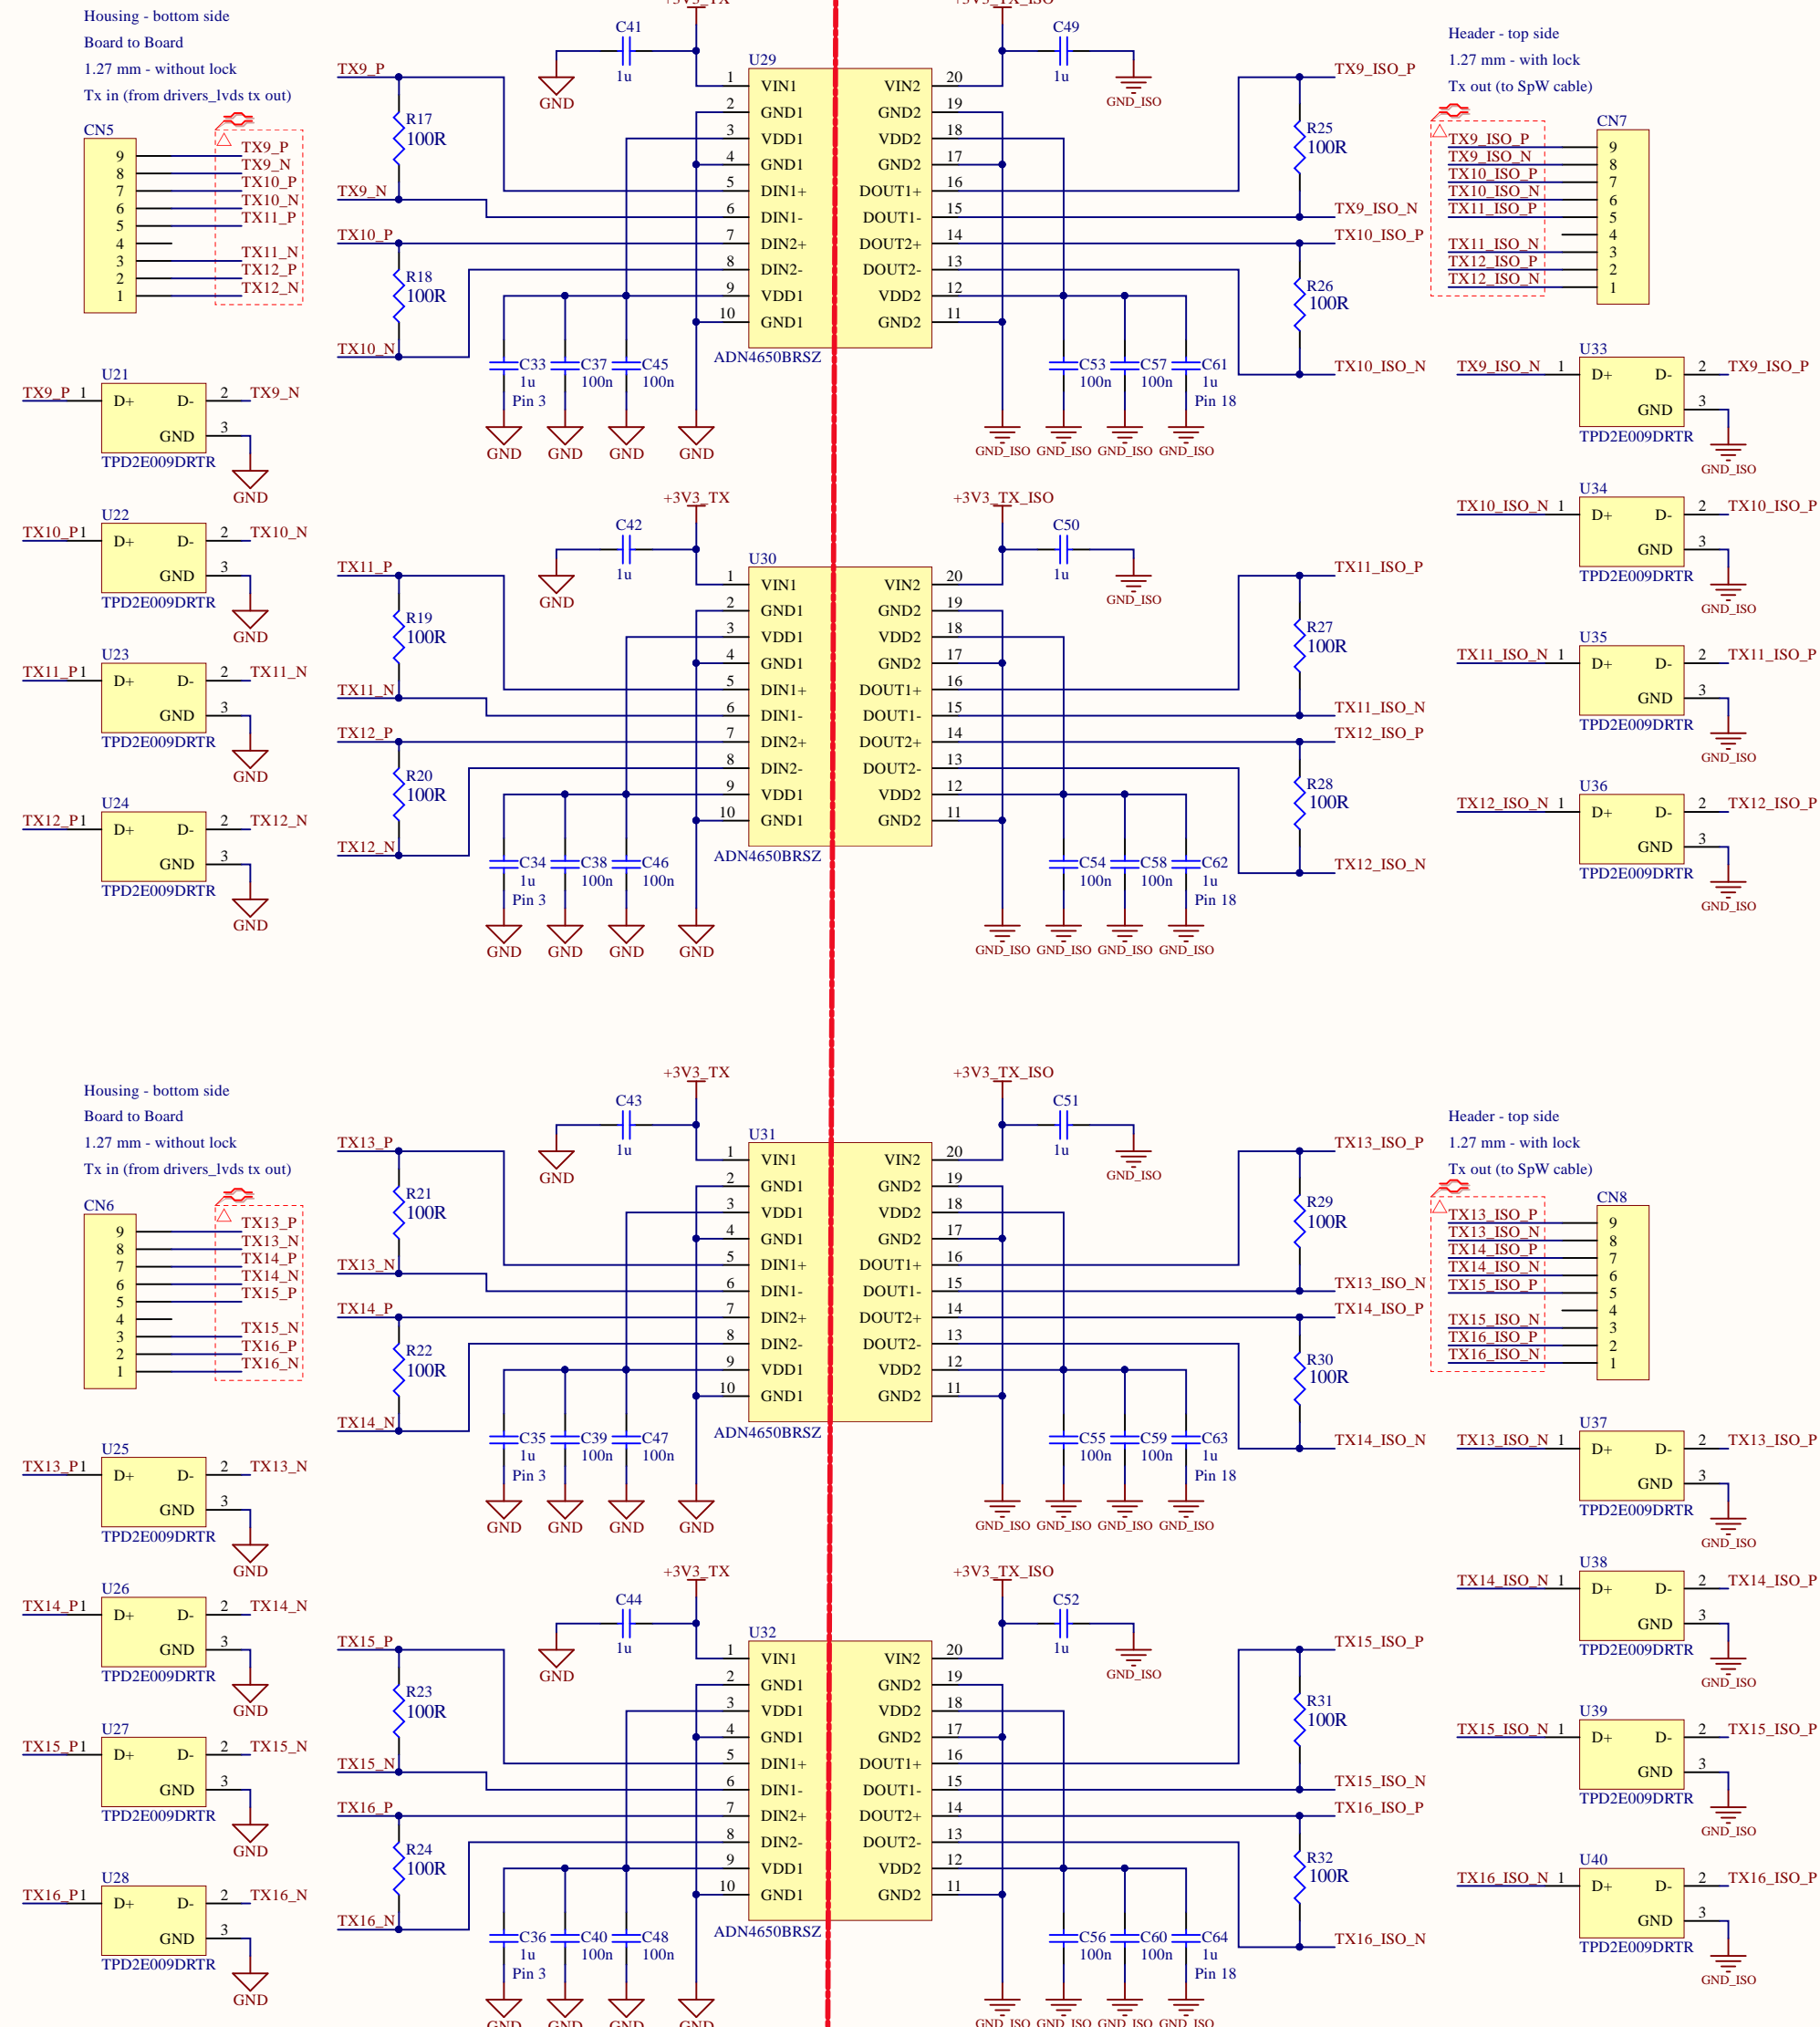


3750 Vrms - 600 Mbps ISOLATED EXTERNAL SpW LVDS TX DRIVERS

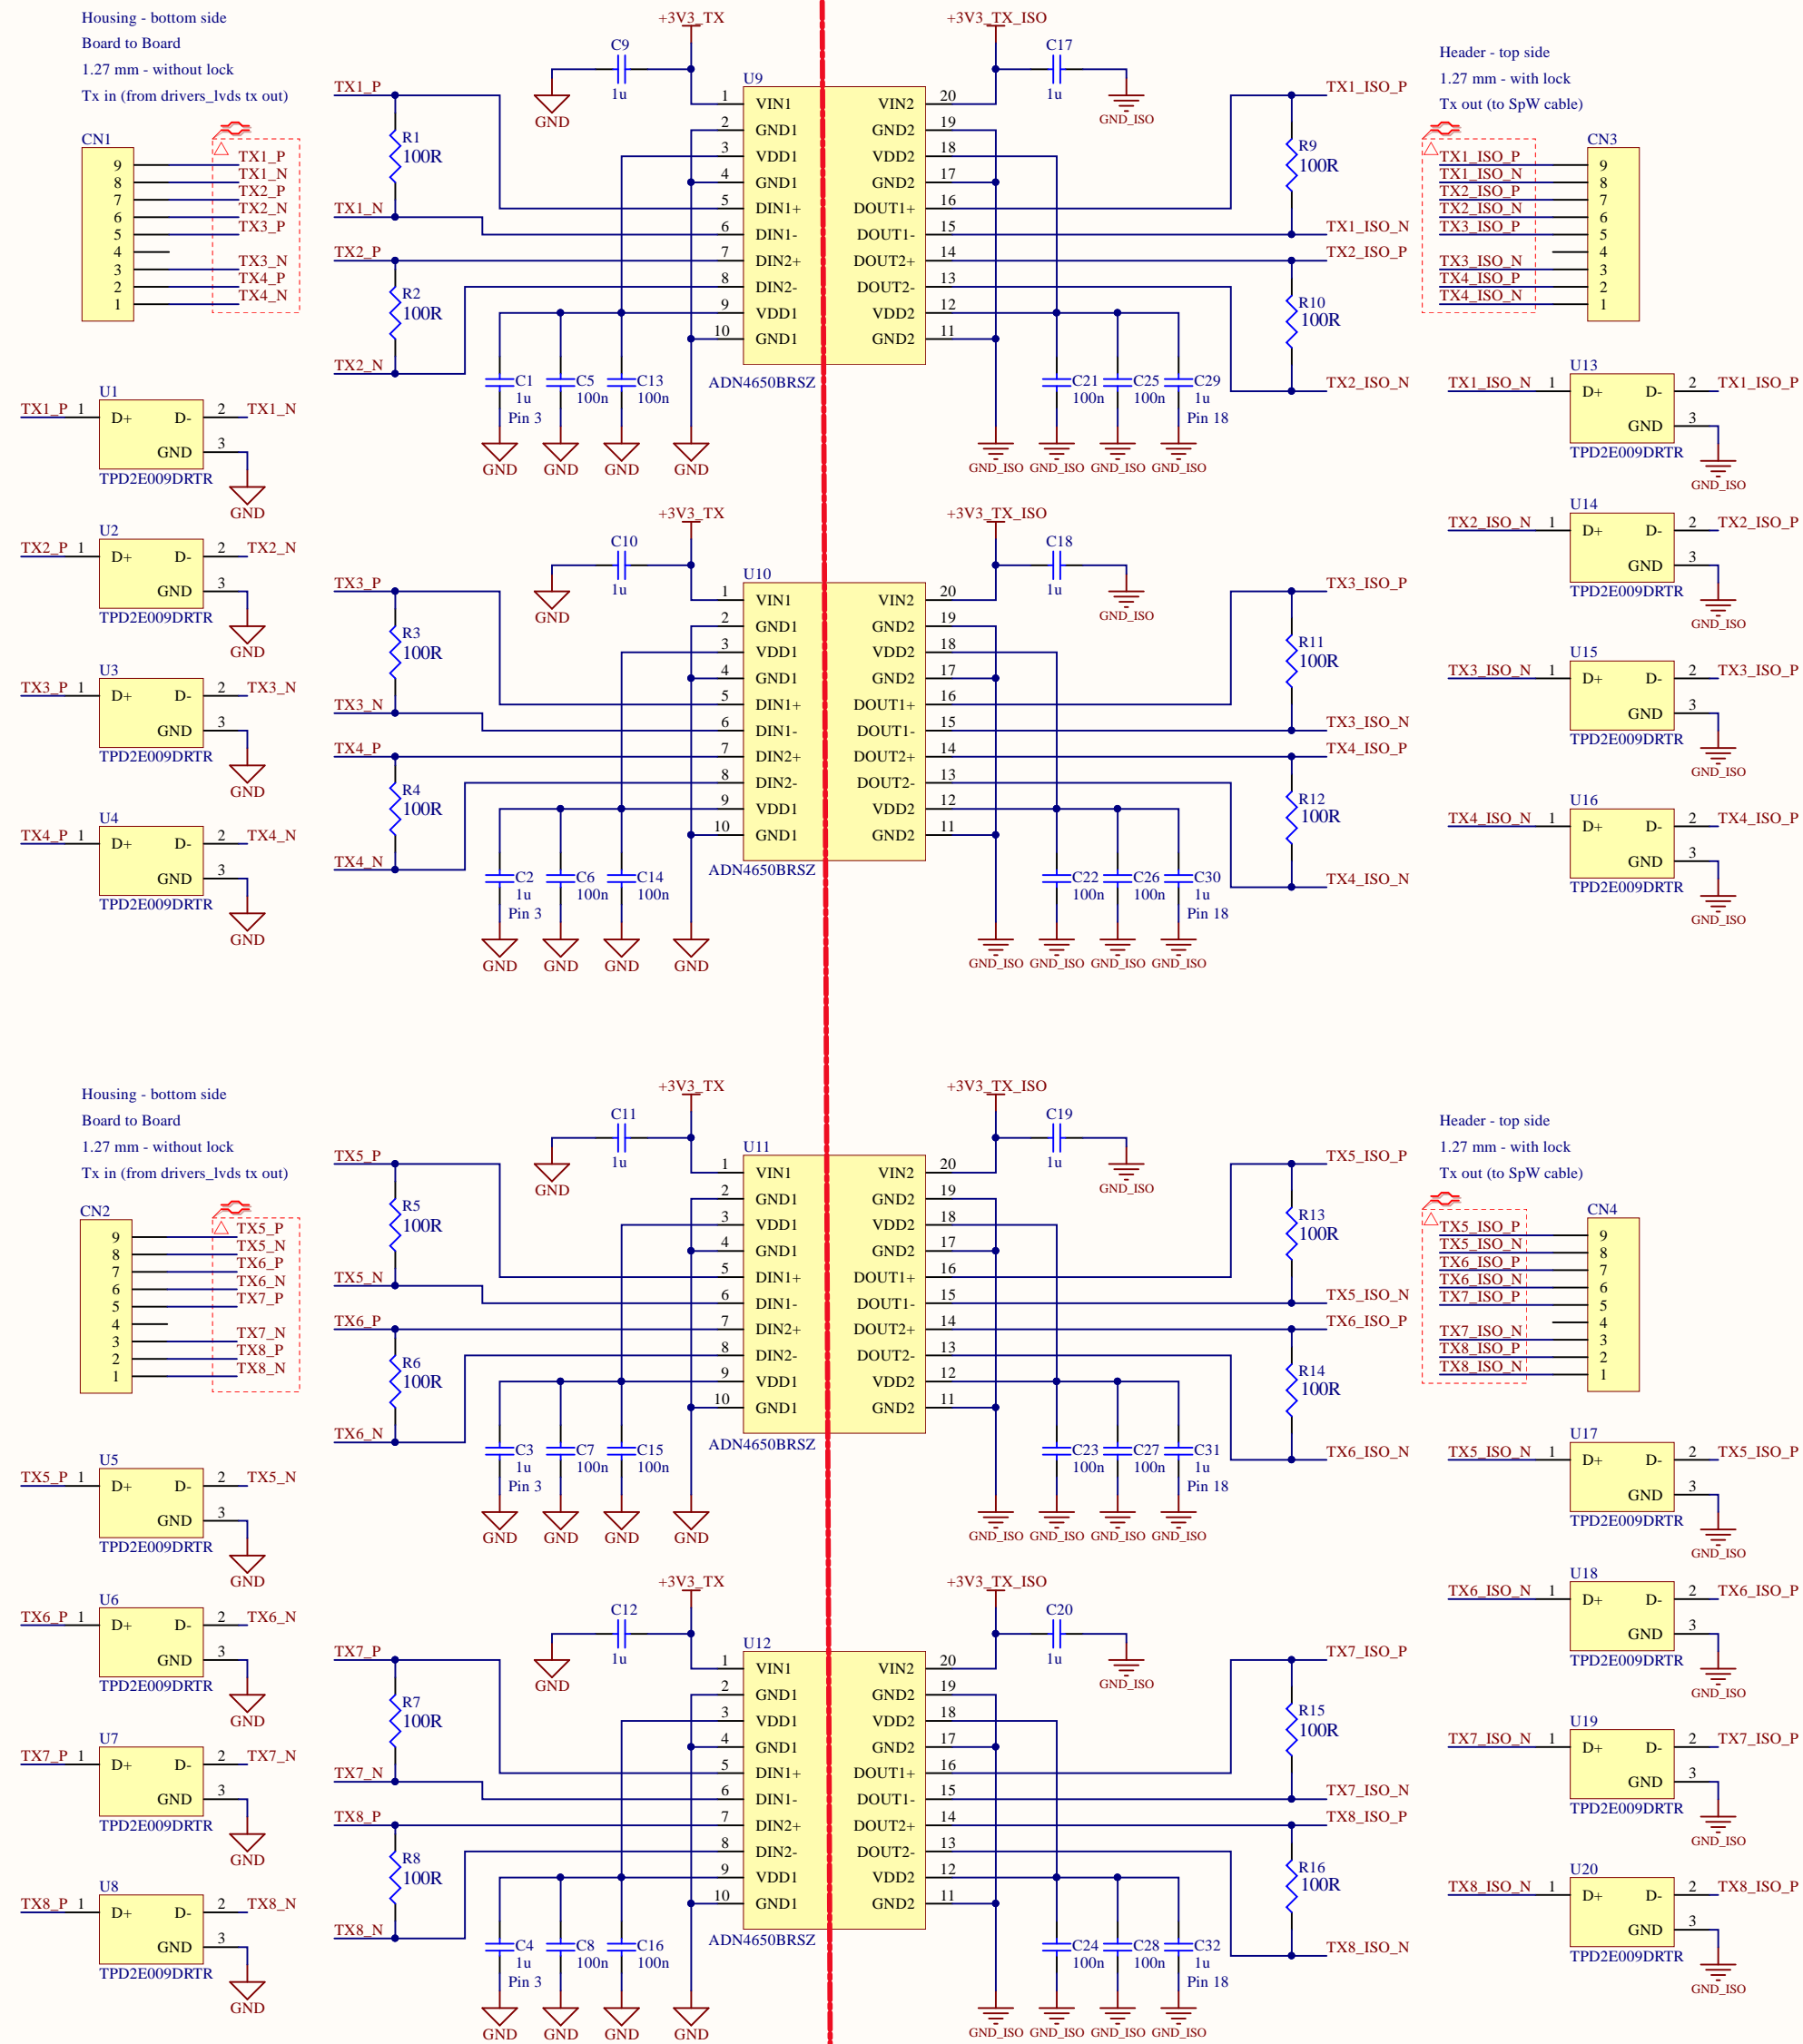

3750 Vrms - 600 Mbps  
ISOLATED EXTERNAL SpW LVDS RX DRIVERS

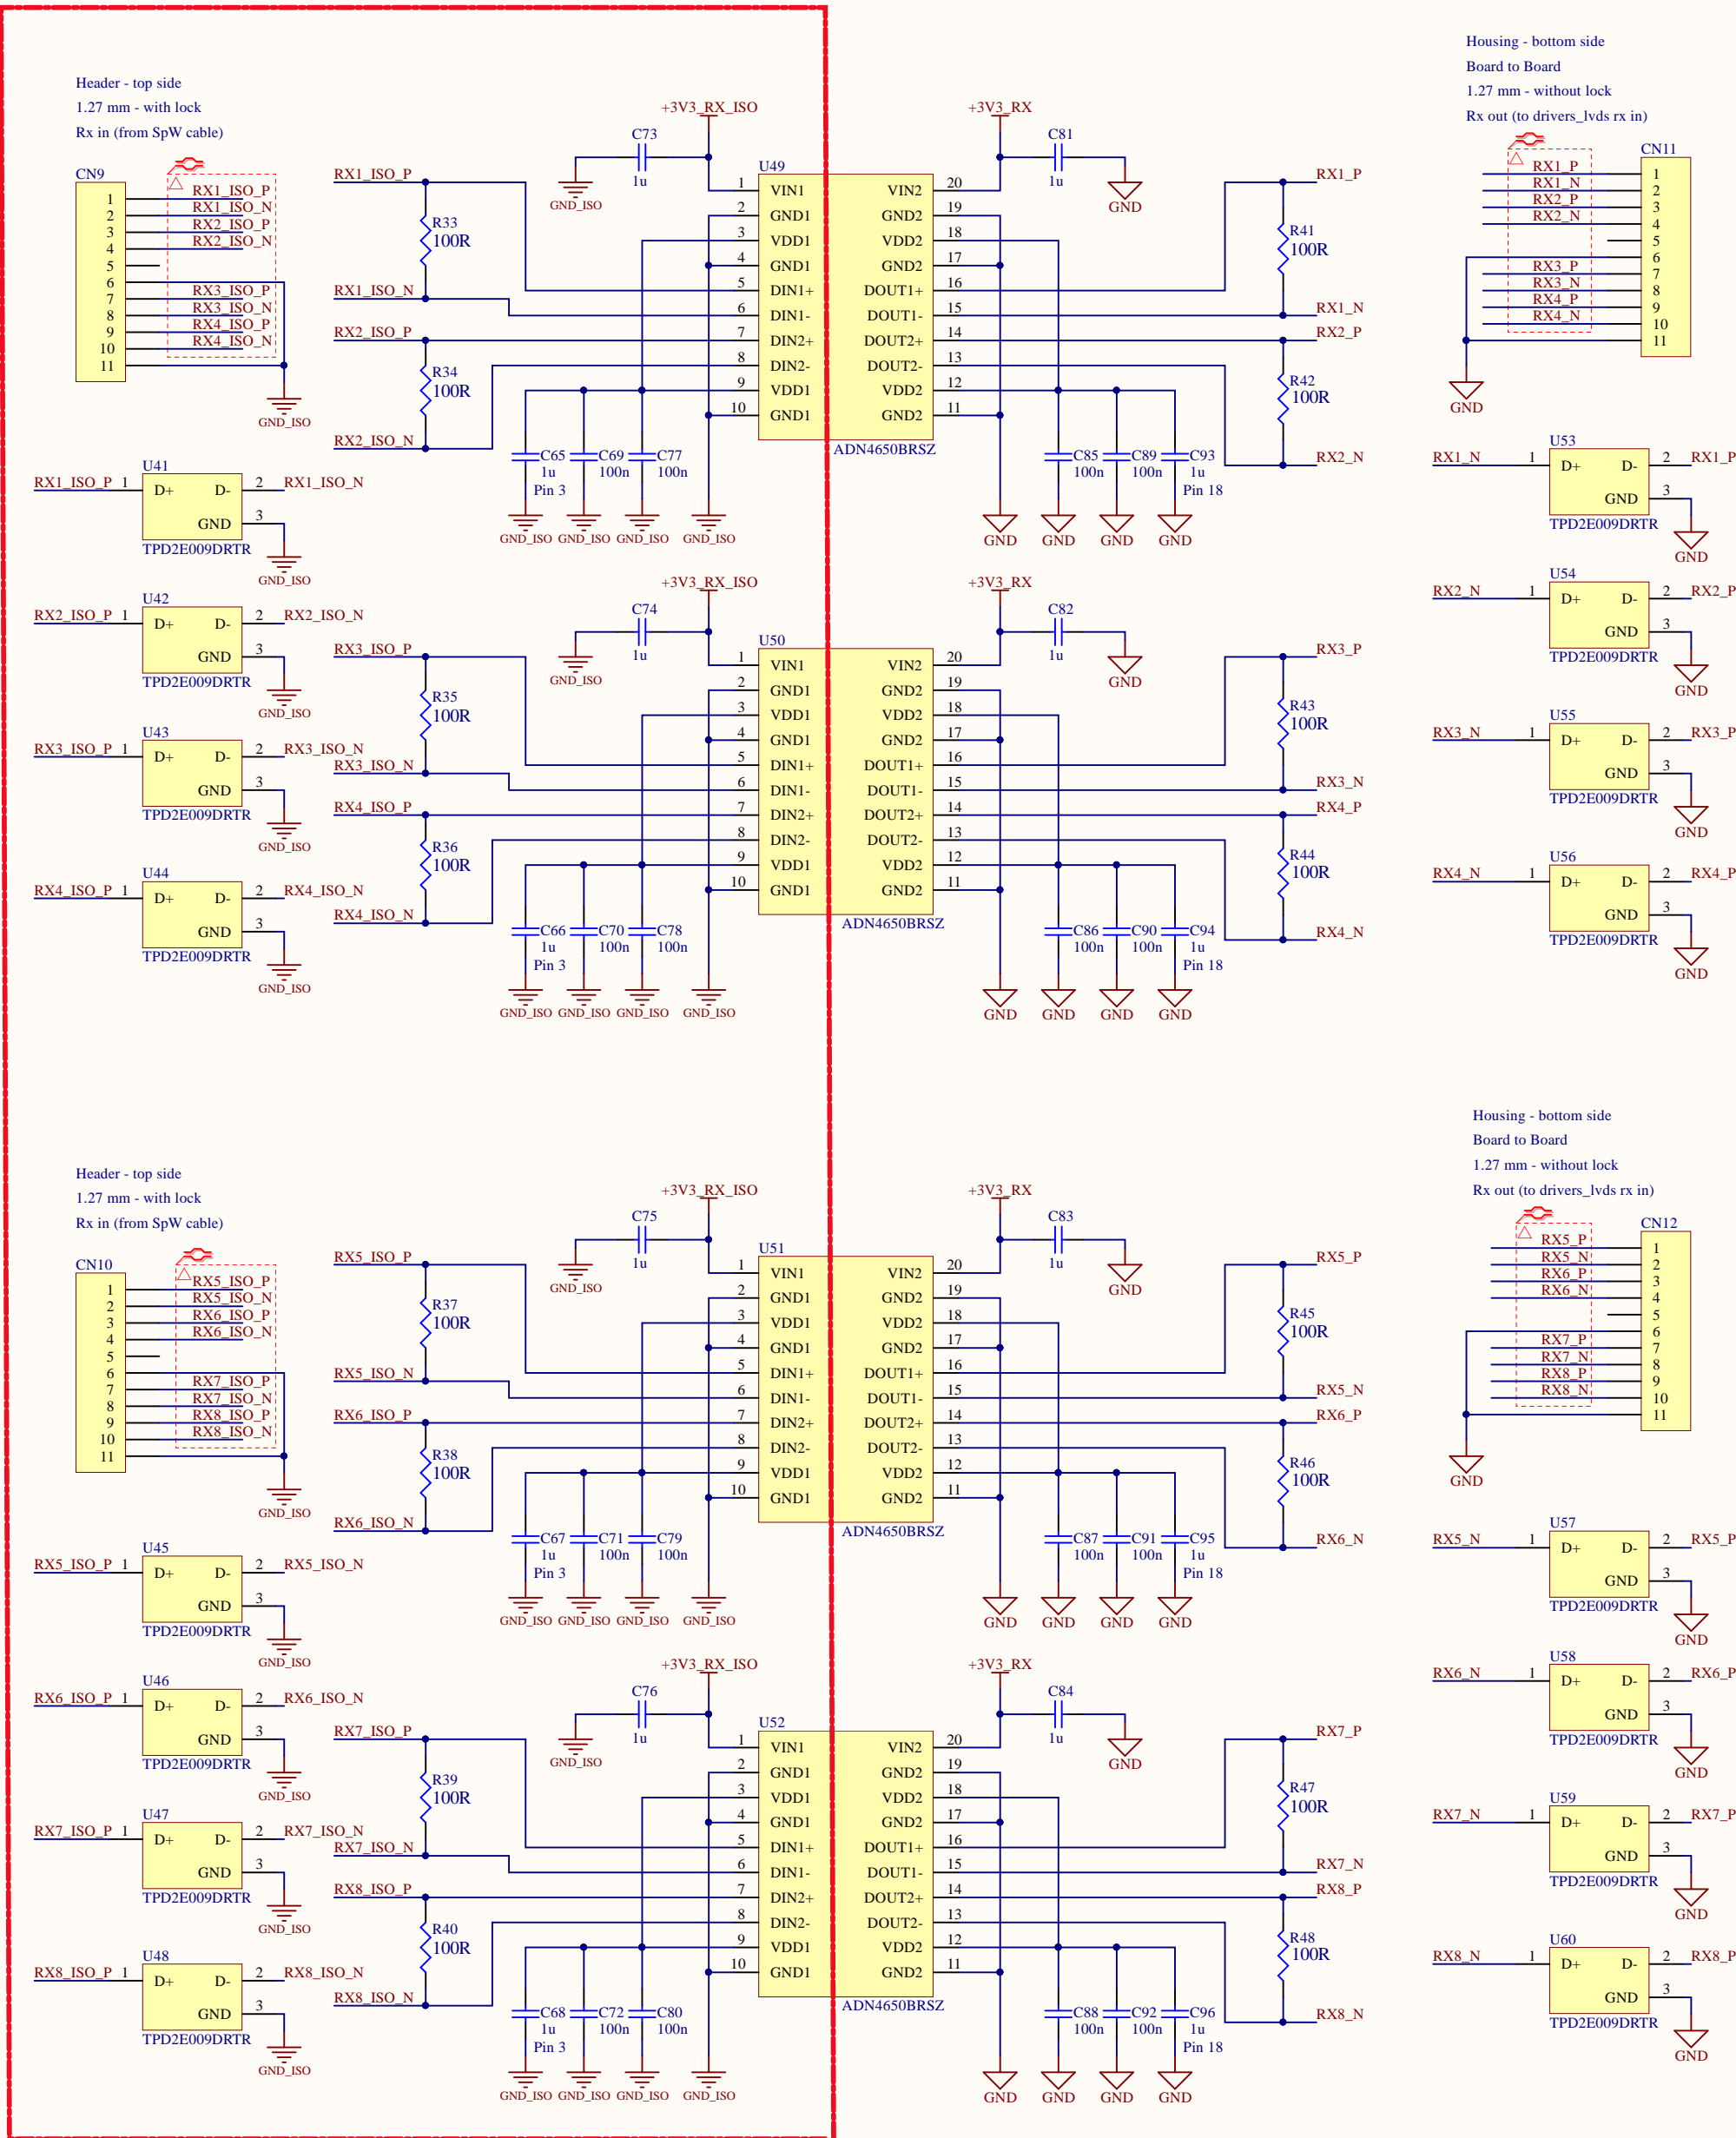

3750 Vrms - 600 Mbps  
ISOLATED EXTERNAL SpW LVDS RX DRIVERS

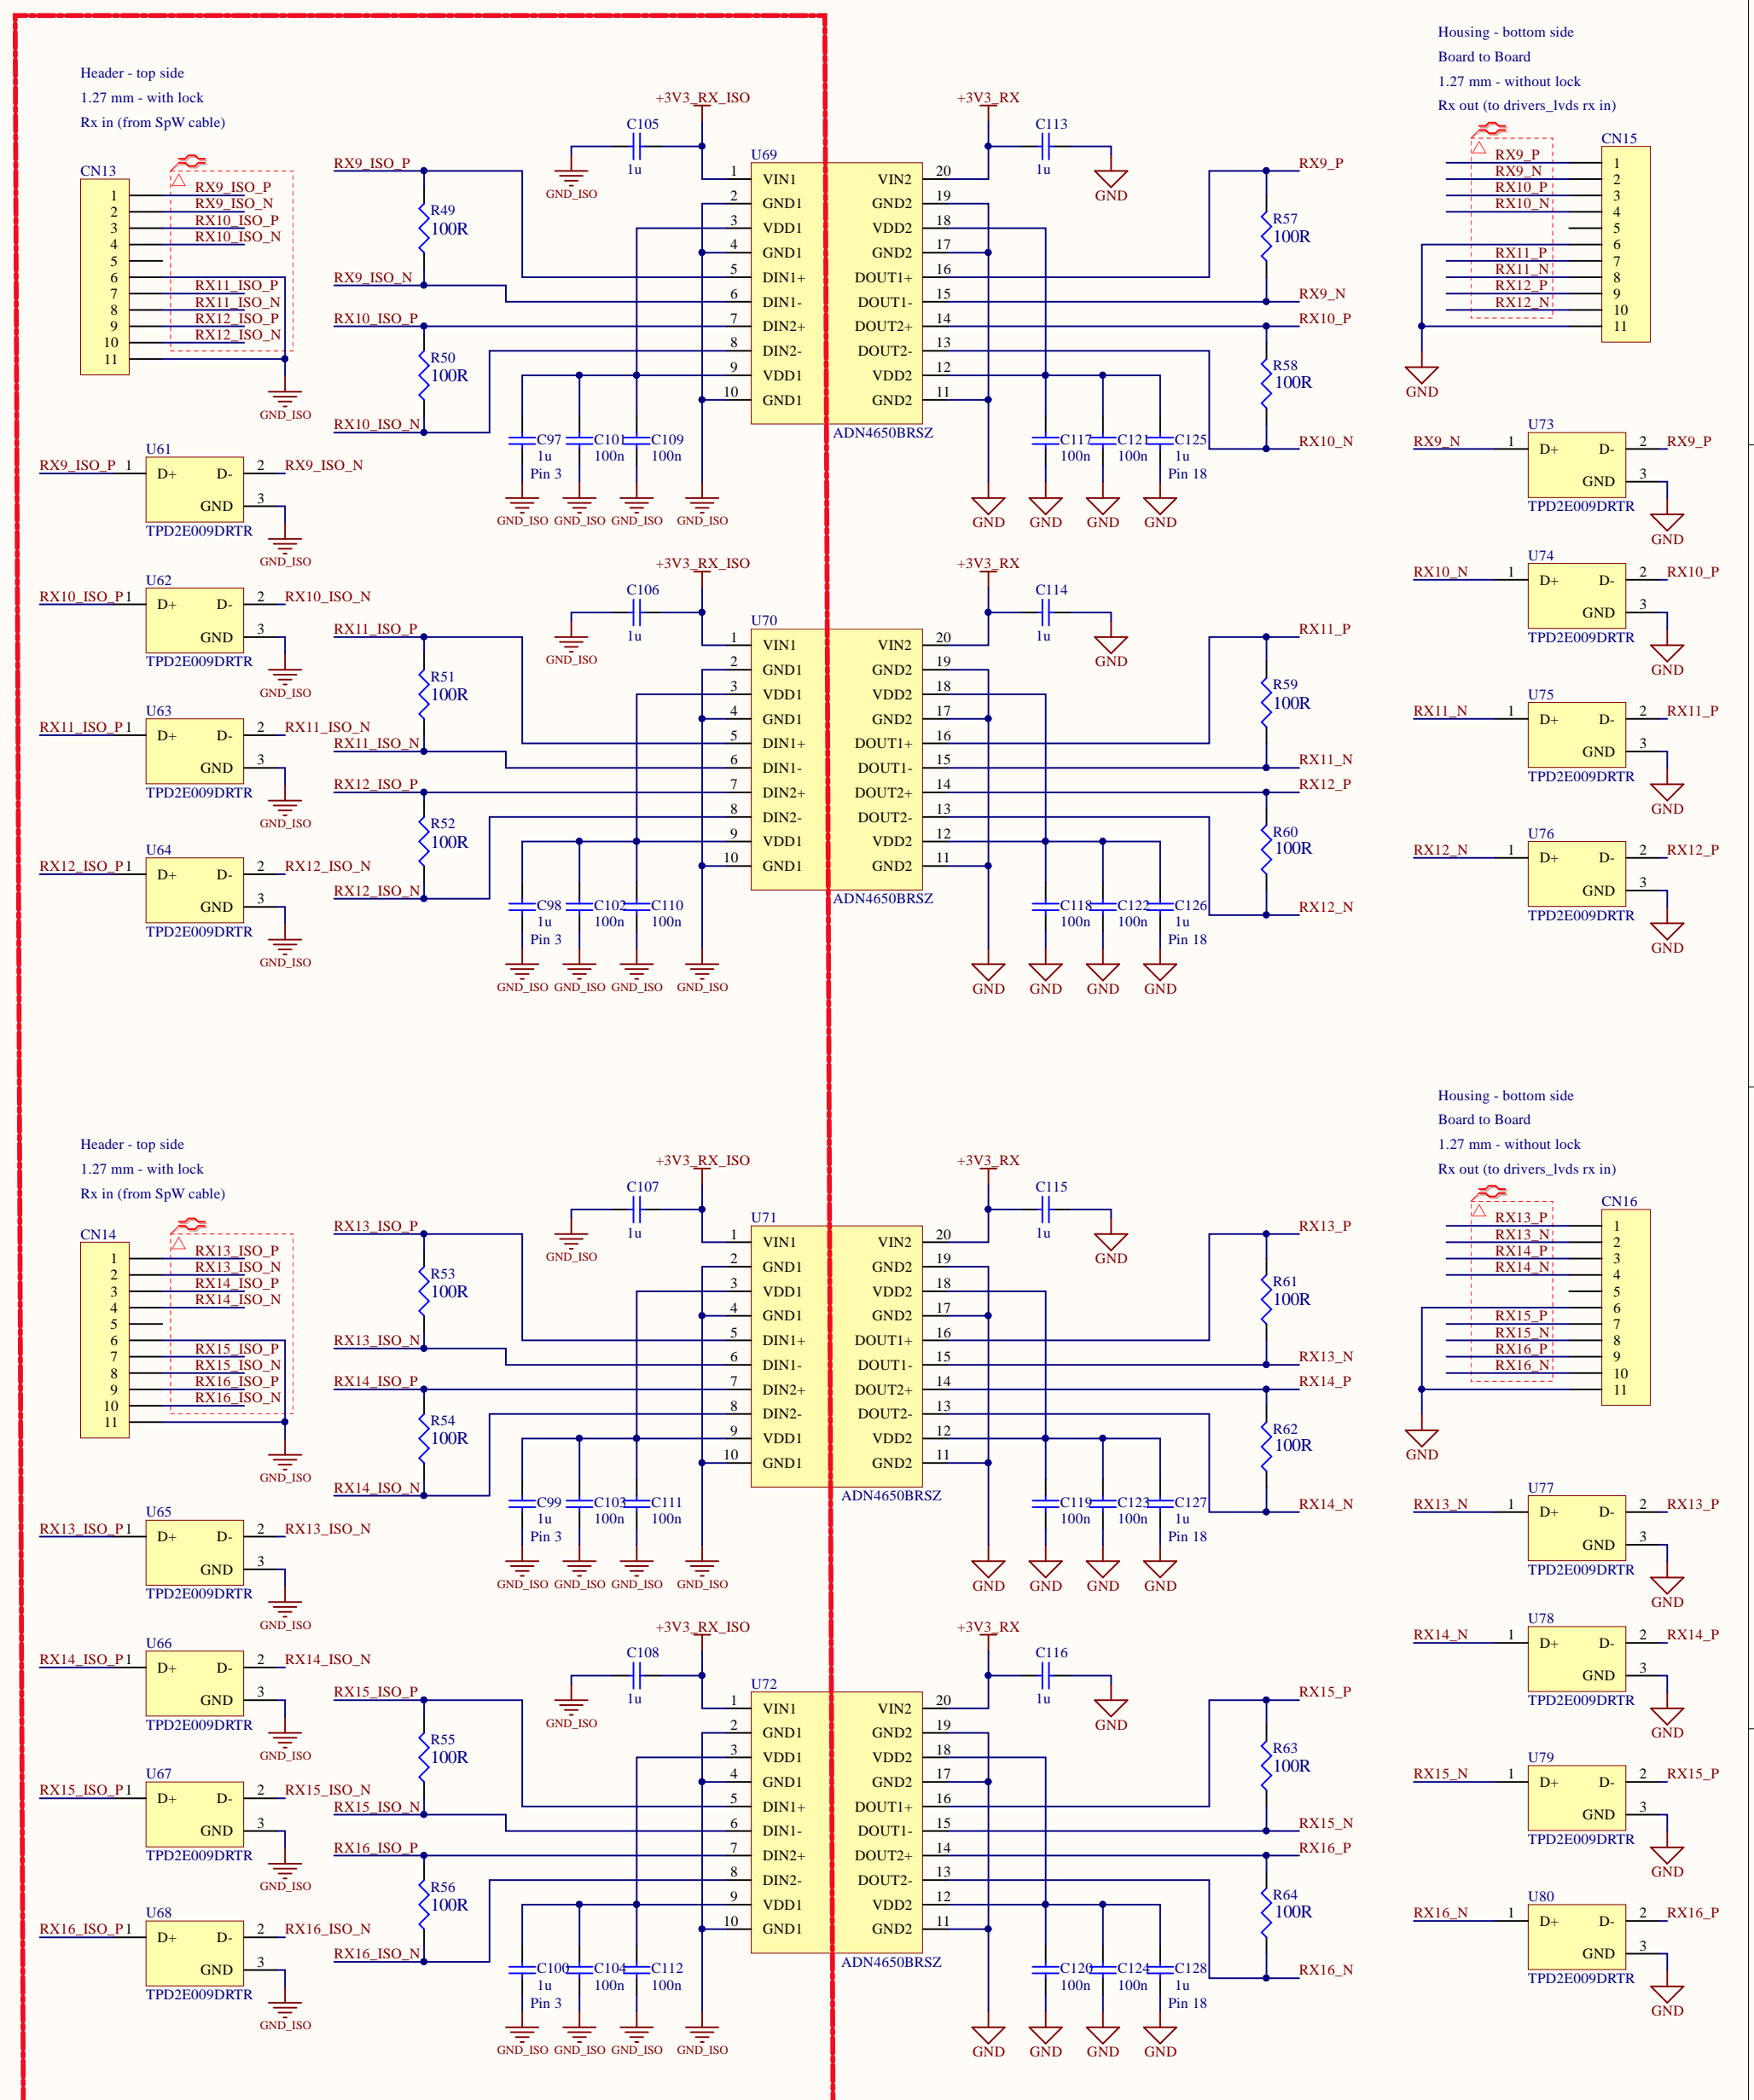

All LVDS lines protected with Dual-Matching TVS Diodes TPD2E009

Title Rx iso drivers		
Size A2	Number iso_simucan.PrjPCB	Revision 1_00
Date: 06/03/2018	Sheet2 of 4	
File: C:\projeto\...iso_lvds_rx.SchDoc	Drawn By:CCB	





