

Locating mesh on conveyor from moving frames




Input : Video of conveyor belt captured using CCTV camera

Output : Binary mask of frames denotes location of the mesh on the conveyor

Methods used : Background Subtraction

Working Procedure :

1. Load the cropped captured video as an input
2. Reads first 30 frames to build a median background model
3. Convert RGB frames to gray
4. Then subtracts this background from each frame to **isolate moving objects** (mesh).
5. Threshold + morphology remove noise and convert to binary mask.
6. Finally displaying original and detected mask side-by-side.

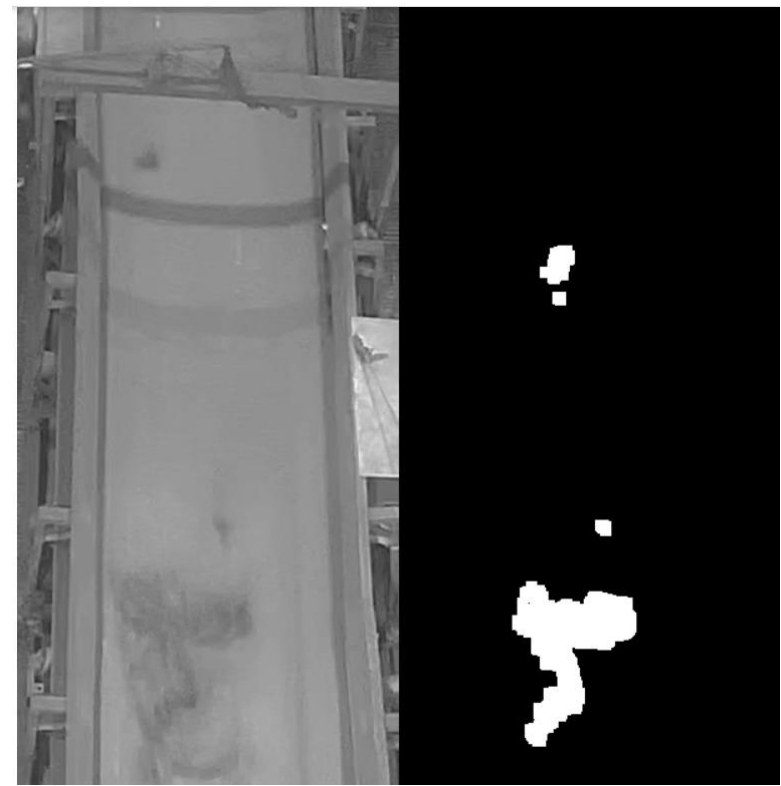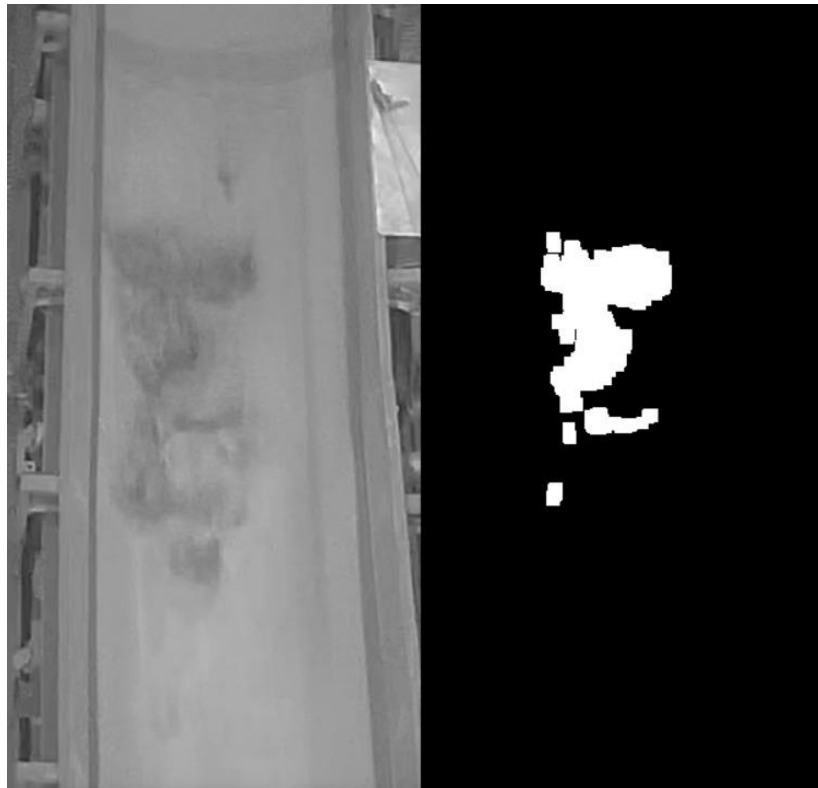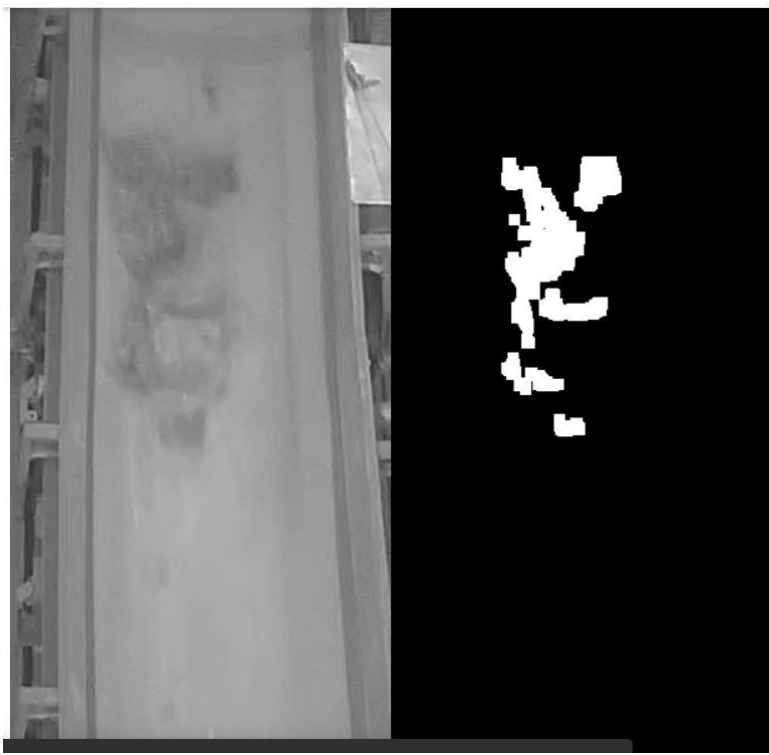

The above sample outputs shows the location of the mesh in moving conveyor