


T2032 (R2TP) TP04.3 [pkt] VLAN avec Switch L3

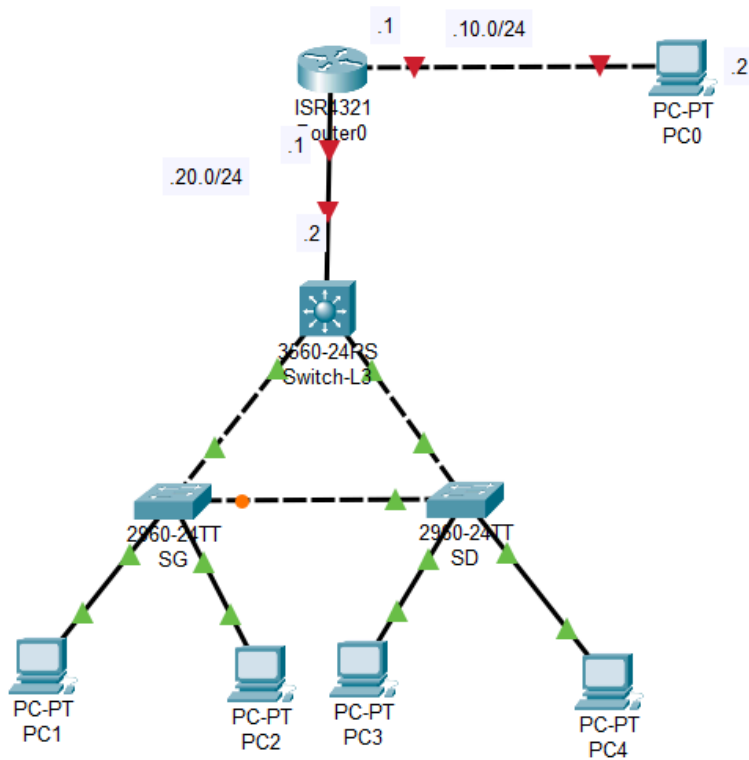


Réseau global: 192.168.0.0

VLAN30
Name: user
PC1 et PC3
.30.0/24

VLAN40
Name: compta
PC2 et PC4
.40.0/24

VLAN99
Name: IT
Les 2 switchs
Modifiez le VLAN natif par défaut pour que ce soit le VLAN99
.99.0/24

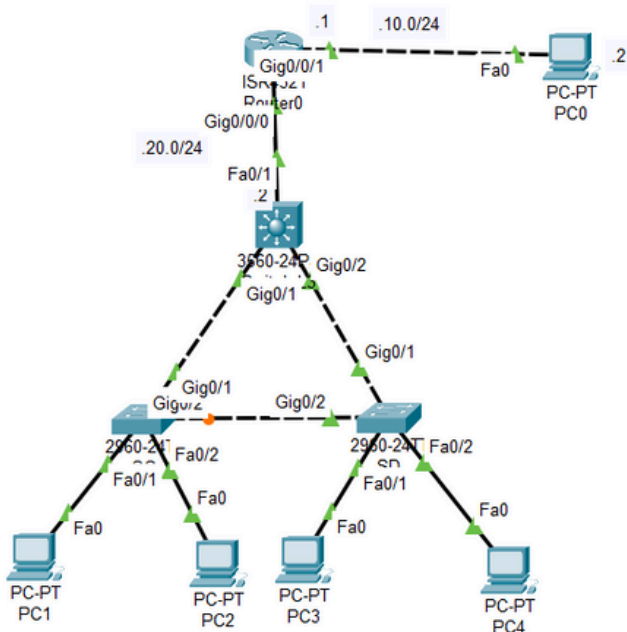

Réseau global: 192.168.0.0

VLAN30
Name: user
PC1 et PC3
.30.0/24

VLAN40
Name: compta
PC2 et PC4
.40.0/24

VLAN99
Name: IT
Les 2 switchs
Modifiez le VLAN natif par défaut pour que ce soit le VLAN99
.99.0/24

VLAN	Nom	Réseau	Équipements
30	user	192.168.30.0/24	PC1 & PC3
40	compta	192.168.40.0/24	PC2 & PC4
99	IT	192.168.99.0/24	SD & SG

PC	VLAN	IP	Passerelle
PC1	30	192.168.30.2	192.168.30.1
PC3	30	192.168.30.3	192.168.30.1
PC2	40	192.168.40.2	192.168.40.1
PC4	40	192.168.40.3	192.168.40.1
PC0	—	10.0.0.2	10.0.0.1

PC1

```
ip 192.168.30.2
Mask 255.255.255.0
gateway 192.168.30.1
```

PC3

```
ip 192.168.30.3
Mask 255.255.255.0
gateway 192.168.30.1
```

PC2

ip 192.168.40.2

Mask 255.255.255.0

gateway 192.168.40.1

PC4

ip 192.168.40.3

Mask 255.255.255.0

gateway 192.168.40.1

SG

en

conf t

hostname SG

vlan 30

name user

exit

vlan 40

name compta

exit

vlan 99

name IT

exit

int Fa0/1

switchport mode access

switchport access vlan 30

exit

int Fa0/2

switchport mode access

switchport access vlan 40

exit

int G0/1

switchport mode trunk

switchport trunk native vlan 99

exit

int vlan 99

ip addr 192.168.99.2 255.255.255.0

no shut

exit

ip default-gateway 192.168.99.1

SD

en

conf t

hostname SD

vlan 30

name user

exit

vlan 40

name compta

exit

vlan 99

name IT

exit

int Fa0/1

switchport mode access

switchport access vlan 30

exit

int Fa0/2

switchport mode access

switchport access vlan 40

exit

int G0/1

switchport mode trunk

switchport trunk native vlan 99

exit

int vlan 99

ip addr 192.168.99.3 255.255.255.0

no shut

exit

ip default-gateway 192.168.99.1

Switch-L3

en

conf t

hostname Switch-L3

vlan 30

name user

exit

vlan 40

name compta

exit

vlan 99

name IT

exit

int vlan 30

ip addr 192.168.30.1 255.255.255.0

no shut

exit

int vlan 40

ip addr 192.168.40.1 255.255.255.0

no shut

exit

int vlan 99

ip addr 192.168.99.1 255.255.255.0

no shut

exit

ip routing

int Fa0/1

no switchport

ip addr 192.168.20.2 255.255.255.0

no shut

exit

int G0/1

switchport mode trunk

switchport trunk native vlan 99

exit

int G0/2

switchport mode trunk

switchport trunk native vlan 99

exit

router rip

version 2

network 192.168.20.0

network 192.168.30.0

network 192.168.40.0

network 192.168.99.0

exit

ISR4321

en

conf t

hostname ISR4321

int G0/0/0

ip addr 192.168.20.1 255.255.255.0

no shut

exit

```
int G0/0/1

ip addr 192.168.10.1 255.255.255.0

no shut

exit
```

```
router rip

version 2

network 192.168.20.0

network 192.168.10.0

exit
```

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC1	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC0	PC2	ICMP		0.000	N	1	(edit)	(delete)
	Successful	PC1	PC2	ICMP		0.000	N	2	(edit)	(delete)
	Successful	PC1	PC4	ICMP		0.000	N	3	(edit)	(delete)