


T2032 (R2TP) TP03.1 [pkt] VLAN à faire ensemble

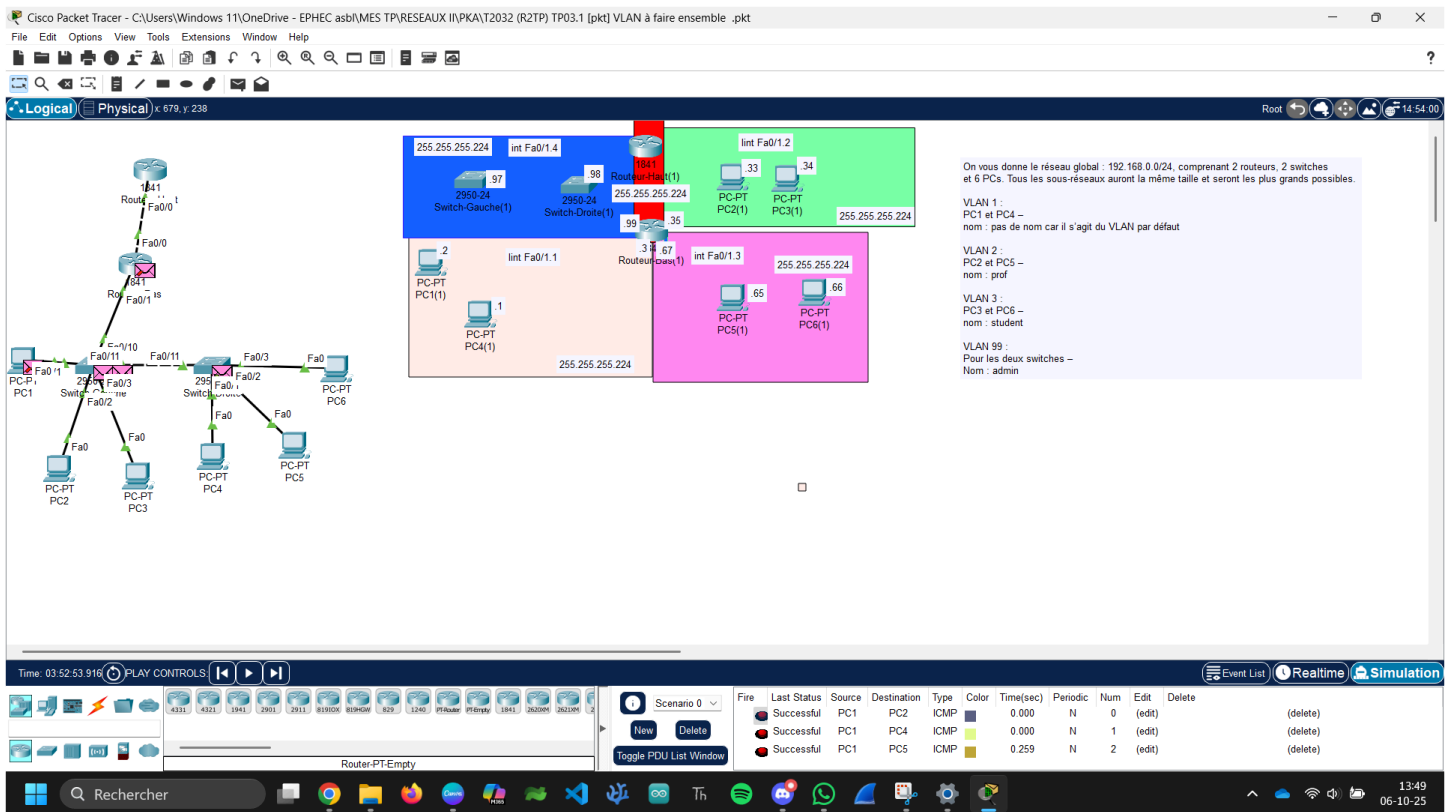

Sous reseaux 1

PC1

ip address 192.168.0.1 255.255.255.224

default gateway 192.168.0.3

PC4

ip address 192.168.0.2 255.255.255.224

default gateway 192.168.0.3

Sous reseaux 2

PC2

ip address 192.168.0.33 255.255.255.224

default gateway 192.168.0.35

PC4

ip address 192.168.0.34 255.255.255.224

default gateway 192.168.0.35

Sous reseaux 3

PC3

ip address 192.168.0.65 255.255.255.224

default gateway 192.168.0.67

PC6

ip address 192.168.0.66 255.255.255.224

default gateway 192.168.0.67

Routeur-Bas

en

conf t

int Fa0/1

no ip addr

no shut

exit

int Fa0/1.1

encapsulation dot1Q 1

ip addr 192.168.0.3 255.255.255.224

no shut

exit

int Fa0/1.2

encapsulation dot1Q 2

ip addr 192.168.0.35 255.255.255.224

no shut

exit

int Fa0/1.3

encapsulation dot1Q 3

ip addr 192.168.0.67 255.255.255.224

no shut

exit

int Fa0/1.99

encapsulation dot1Q 99

ip addr 192.168.0.99 255.255.255.224

no shut

exit

int Fa0/0

ip addr 192.168.0.129 255.255.255.224

no shut

Switch-Gauche

en

conf t

hostname Switch-Gauche

vlan 2

name prof

exit

vlan 3

name student

exit

vlan 99

name admin

exit

int Fa0/1

switchport mode access

exit

int Fa0/2

switchport mode access

switchport access vlan 2

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/11

switchport mode trunk

exit

int Fa0/10

switchport mode trunk

exit

int vlan 99

ip addr 192.168.0.97 255.255.255.224

no shut

exit

ip default-gateway 192.168.0.99

Switch-Droite

en

conf t

hostname Switch-Droite

vlan 2

name prof

exit

vlan 3

name student

exit

vlan 99

name admin

exit

int Fa0/1

switchport mode access

exit

int Fa0/2

switchport mode access

switchport access vlan 2

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/11

switchport mode trunk

exit

```
int vlan 99
```

```
ip addr 192.168.0.98 255.255.255.224
```

```
no shut
```

```
exit
```

```
ip default-gateway 192.168.0.99
```

Routeur-Haut

```
en
```

```
conf t
```


```
hostname Routeur-Haut
```

```
int Fa0/0
```

```
ip addr 192.168.0.130 255.255.255.224
```

```
no shut
```

T2032 (R2TP) TP03.2 [pkt] VLAN

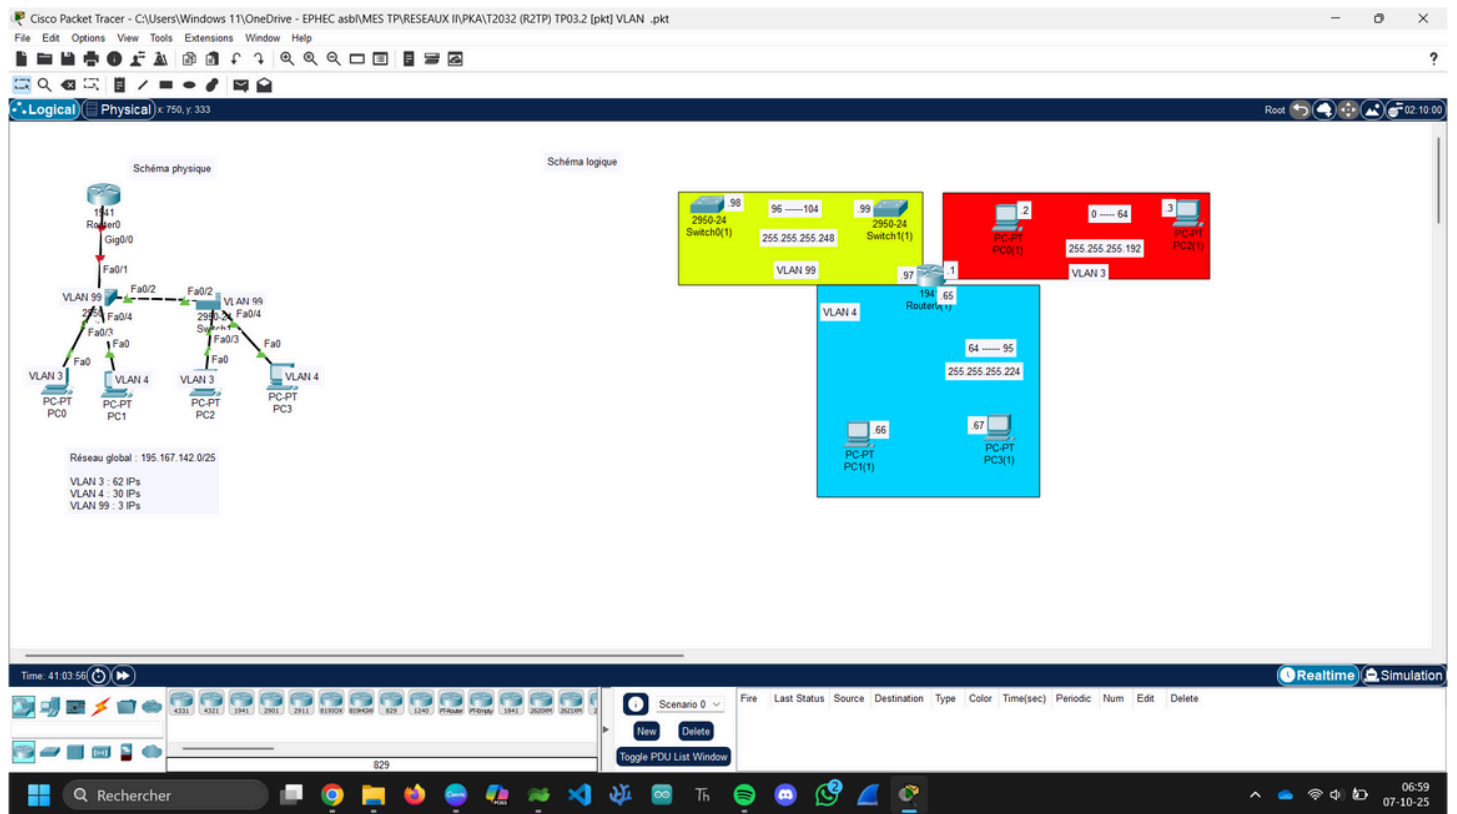

Sous reseaux 1

PC0

ip address 195.167.142.2 255.255.255.192

default gateway 195.167.142.1

PC2

ip address 195.167.142.3 255.255.255.192

default gateway 195.167.142.1

Sous reseaux 2

PC1

ip address 195.167.142.66 255.255.255.224

default gateway 195.167.142.65

PC3

ip address 195.167.142.67 255.255.255.224

default gateway 195.167.142.65

Switch0

en

conf t

hostname Switch0

vlan 3

exit

vlan 4

exit

vlan 99

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/4

switchport mode access

switchport access vlan 4

exit

int Fa0/1

switchport mode trunk

exit

int Fa0/2

switchport mode trunk

exit

int vlan 99

ip addr 195.167.142.98 255.255.255.248

no shut

exit

ip default-gateway 195.167.142.97

Switch1

en

conf t

hostname Switch1

vlan 3

exit

vlan 4

exit

vlan 99

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/4

switchport mode access

switchport access vlan 4

exit

int Fa0/2

switchport mode trunk

exit

int vlan 99

ip addr 195.167.142.99 255.255.255.248

no shut

exit

ip default-gateway 195.167.142.97

Router0

en

conf t

int G0/0

no ip addr

no shut

exit

int G0/0.3

encapsulation dot1Q 3

ip addr 195.167.142.1 255.255.255.192

no shut

exit

int G0/0.4

encapsulation dot1Q 4

ip addr 195.167.142.65 255.255.255.224

no shut

exit

int G0/0.99


encapsulation dot1Q 99

ip addr 195.167.142.97 255.255.255.248

no shut

exit


T2032 (R2TP) TP03.3 [pkt] VLAN et routage

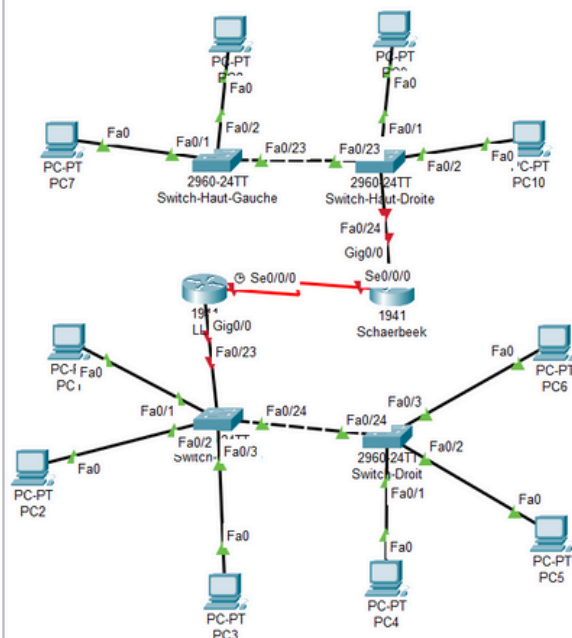

VLAN 110 : PC7 et PC9 - name Serveur - 192.168.110.0/24
 VLAN 120 : PC8 et PC10 - name Compta - 192.168.120.0/24
 Pas d'IP sur les switch

Réseau entre les 2 routeurs : 192.168.0.0/30
 Routage RIP

VLAN 10 : PC1 et PC4 - name Student - 192.168.10.0/24
 VLAN 20 : PC2 et PC5 - name Prof - 192.168.20.0/24
 VLAN 30 : PC3 et PC 6 - name IT - 192.168.30.0/24
 VLAN 99 : Switch-Gauche et Switch-Droit - VLAN natif - 192.168.99.0/24

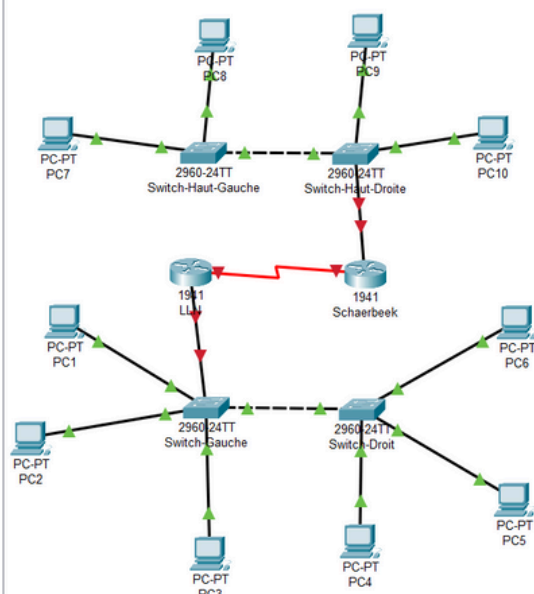

VLAN 110 : PC7 et PC9 - name Serveur - 192.168.110.0/24
 VLAN 120 : PC8 et PC10 - name Compta - 192.168.120.0/24
 Pas d'IP sur les switch

Réseau entre les 2 routeurs : 192.168.0.0/30
 Routage RIP

VLAN 10 : PC1 et PC4 - name Student - 192.168.10.0/24
 VLAN 20 : PC2 et PC5 - name Prof - 192.168.20.0/24
 VLAN 30 : PC3 et PC 6 - name IT - 192.168.30.0/24
 VLAN 99 : Switch-Gauche et Switch-Droit - VLAN natif - 192.168.99.0/24

VLAN	Nom	Machines	Réseau
10	Student	PC1, PC4	192.168.10.0/24
20	Prof	PC2, PC5	192.168.20.0/24
30	IT	PC3, PC6	192.168.30.0/24
99	Native	Switch-Gauche, Switch-Droit	192.168.99.0/24

PC1

ip 192.168.10.2

Mask 255.255.255.0

gateway 192.168.10.1

PC4

ip 192.168.10.3

Mask 255.255.255.0

gateway 192.168.10.1

PC2

ip 192.168.20.2

Mask 255.255.255.0

gateway 192.168.20.1

PC5

ip 192.168.20.3

Mask 255.255.255.0

gateway 192.168.20.1

PC3

ip 192.168.30.2

Mask 255.255.255.0

gateway 192.168.30.1

PC6

ip 192.168.30.3

Mask 255.255.255.0

gateway 192.168.30.1

Switch-Gauche

en

conf t

hostname Switch-Gauche

vlan 10

name Student

exit

vlan 20

name Prof

exit

vlan 30

name IT

exit

vlan 99

exit

int Fa0/1

switchport mode access

switchport access vlan 10

exit

int Fa0/2

switchport mode access

switchport access vlan 20

exit

int Fa0/3

switchport mode access

switchport access vlan 30

exit

int Fa0/24

switchport mode trunk

switchport trunk native vlan 99

exit


```
int Fa0/23
```

```
switchport mode trunk
```

```
switchport trunk native vlan 99
```

```
exit
```

```
int vlan 99
```

```
ip addr 192.168.99.2 255.255.255.0
```

```
no shut
```

```
exit
```

```
ip default-gateway 192.168.99.1
```

Switch-Droit

```
en
```

```
conf t
```

```
hostname Switch-Droit
```

```
vlan 10
```

```
name Student
```

```
exit
```

```
vlan 20
```

```
name Prof
```

```
exit
```

vlan 30

name IT

exit

vlan 99

exit

int Fa0/1

switchport mode access

switchport access vlan 10

exit

int Fa0/2

switchport mode access

switchport access vlan 20

exit

int Fa0/3

switchport mode access

switchport access vlan 30

exit

int Fa0/24

switchport mode trunk

switchport trunk native vlan 99

exit

int vlan 99

ip addr 192.168.99.3 255.255.255.0

no shut

exit

ip default-gateway 192.168.99.1

LLN

en

conf t

hostname LLN

int G0/0

no ip addr

no shut

exit

int G0/0.10

encapsulation dot1Q 10

ip addr 192.168.10.1 255.255.255.0

no shut

exit

int G0/0.20

encapsulation dot1Q 20

ip addr 192.168.20.1 255.255.255.0

no shut

exit

int G0/0.30

encapsulation dot1Q 30

ip addr 192.168.30.1 255.255.255.0

no shut

exit

int G0/0.99

encapsulation dot1Q 99 native

ip addr 192.168.99.1 255.255.255.0

no shut

exit

int S0/0/0

ip addr 192.168.0.1 255.255.255.252

no shut

exit

router rip

version 2

network 192.168.0.0

network 192.168.10.0

network 192.168.20.0

network 192.168.30.0

network 192.168.99.0

passive-interface G0/0

exit

VLAN	Nom	Machines	Réseau
110	Serveur	PC7, PC9	192.168.110.0/24
120	Compta	PC8, PC10	192.168.120.0/24

PC7

ip 192.168.110.2

Mask 255.255.255.0

gateway 192.168.110.1

PC9

ip 192.168.110.3

Mask 255.255.255.0

gateway 192.168.110.1

PC8

ip 192.168.120.2

Mask 255.255.255.0

gateway 192.168.120.1

PC10

ip 192.168.120.3

Mask 255.255.255.0

gateway 192.168.120.1

SWITCH-HAUT-GAUCHE (site haut)

en

conf t

hostname SWITCH-HAUT-GAUCHE

vlan 110

name Serveur

exit

vlan 120

name Compta

exit

int Fa0/1

switchport mode access

switchport access vlan 110

exit

int Fa0/2

switchport mode access

switchport access vlan 120

exit

int Fa0/23

switchport mode trunk

exit

SWITCH-HAUT-DROIT (site haut)

en

conf t

hostname SWITCH-HAUT-DROIT

vlan 110

name Serveur

exit

vlan 120

name Compta

exit

int Fa0/1

switchport mode access

switchport access vlan 110

exit

int Fa0/2

switchport mode access

switchport access vlan 120

exit

int Fa0/23

switchport mode trunk

exit

int Fa0/24

switchport mode trunk

exit

SCHAERBEEK

en

conf t

hostname SCHAERBEEK

int G0/0

no ip addr

no shut

exit

int G0/0.110

encapsulation dot1Q 110

ip addr 192.168.110.1 255.255.255.0

no shut

exit

int G0/0.120

encapsulation dot1Q 120

ip addr 192.168.120.1 255.255.255.0

no shut

exit

int S0/0/0

ip addr 192.168.0.2 255.255.255.252

no shut

exit

router rip

version 2

network 192.168.0.0

network 192.168.110.0

network 192.168.120.0

passive-interface G0/0

exit