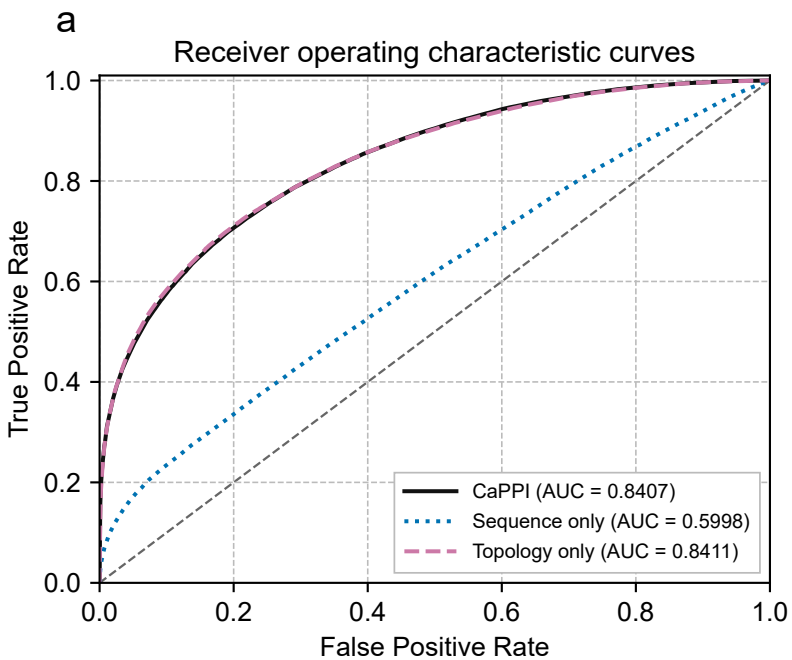
a
Receiver operating characteristic curves
True Positive Rate
False Positive Rate
0.0
0.2
0.4
0.6
0.8
1.0
CaPPI (AUC = 0.8407)
Sequence only (AUC = 0.5998)
Topology only (AUC = 0.8411)

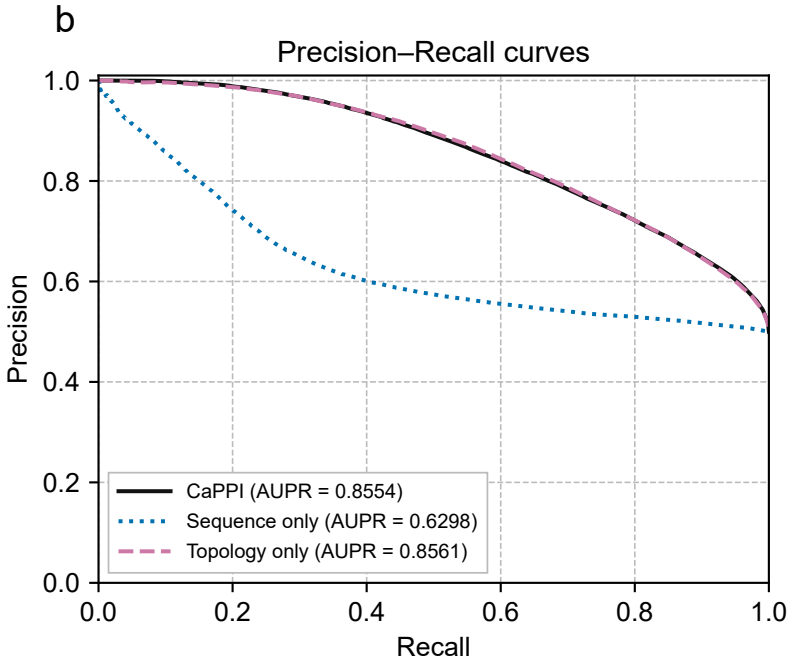
b
Precision–Recall curves
Precision
Recall
0.0
0.2
0.4
0.6
0.8
1.0
CaPPI (AUPR = 0.8554)
Sequence only (AUPR = 0.6298)
Topology only (AUPR = 0.8561)