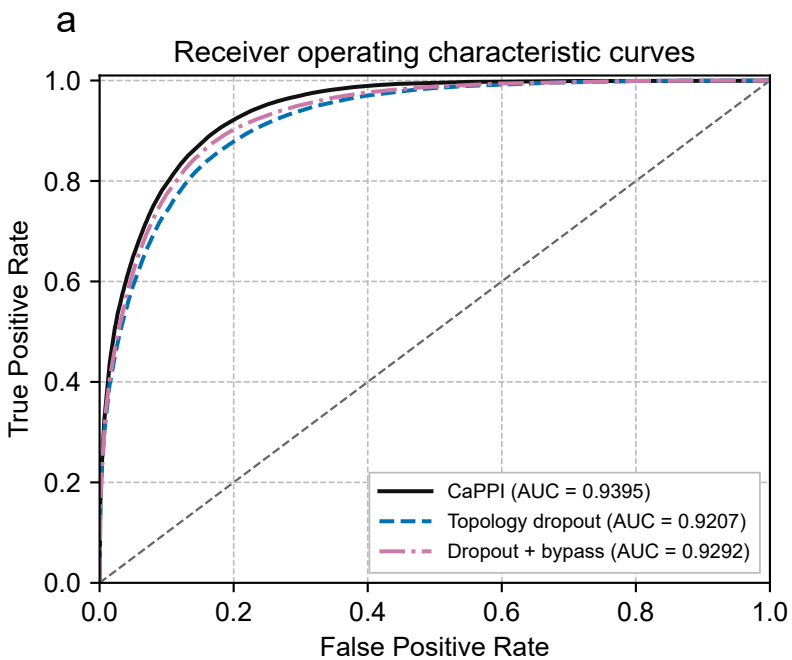
a
Receiver operating characteristic curves
True Positive Rate
False Positive Rate
0.0
0.2
0.4
0.6
0.8
1.0
CaPPI (AUC = 0.9395)
Topology dropout (AUC = 0.9207)
Dropout + bypass (AUC = 0.9292)

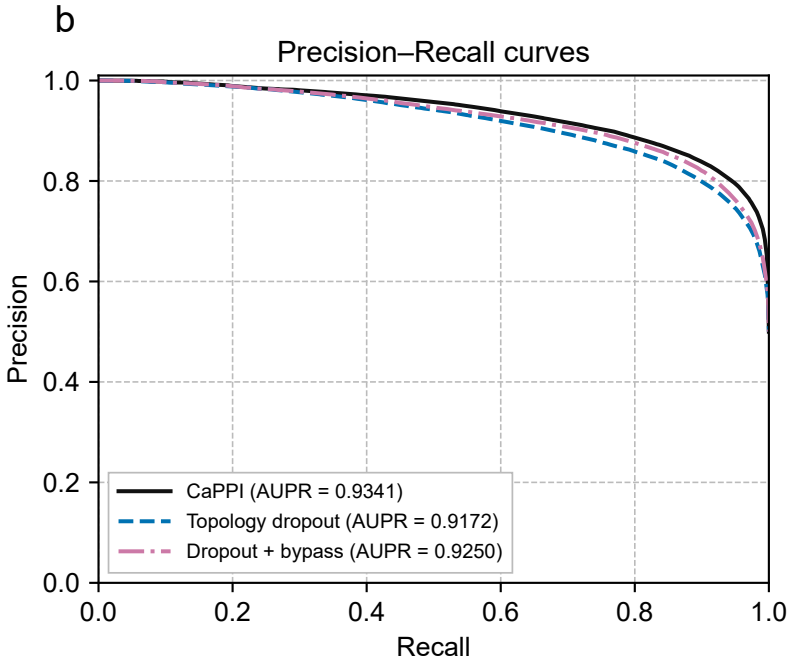
b
Precision–Recall curves
Precision
Recall
0.0
0.2
0.4
0.6
0.8
1.0
CaPPI (AUPR = 0.9341)
Topology dropout (AUPR = 0.9172)
Dropout + bypass (AUPR = 0.9250)