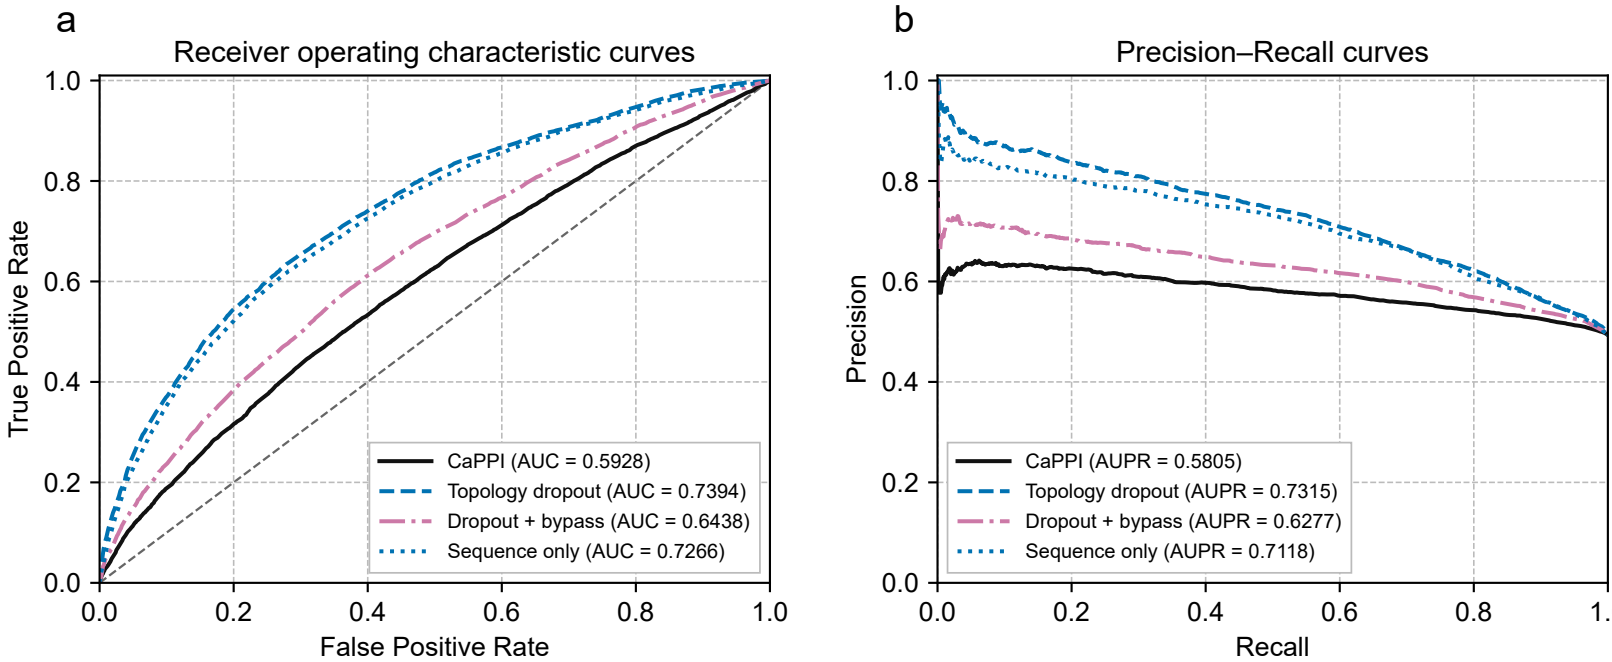
a
Receiver operating characteristic curves
True Positive Rate
False Positive Rate
0.0
0.2
0.4
0.6
0.8
1.0
CaPPI (AUC = 0.5928)
Topology dropout (AUC = 0.7394)
Dropout + bypass (AUC = 0.6438)
Sequence only (AUC = 0.7266)
b
Precision–Recall curves
Precision
Recall
CaPPI (AUPR = 0.5805)
Topology dropout (AUPR = 0.7315)
Dropout + bypass (AUPR = 0.6277)
Sequence only (AUPR = 0.7118)