

Hyper-Realistic Rendering On A Multi-Focal Plane Stereo Display

Nicholas G. Timmons
Downing College



**UNIVERSITY OF
CAMBRIDGE**

*A dissertation submitted to the University of Cambridge
in partial fulfilment of the requirements for the degree of
Master of Philosophy in Advanced Computer Science*

University of Cambridge
Computer Laboratory
William Gates Building
15 JJ Thomson Avenue
Cambridge CB3 0FD
UNITED KINGDOM

Email: ngt26@cl.cam.ac.uk

May 15, 2016

Declaration

I Nicholas G. Timmons of Downing College, being a candidate for the M.Phil in Advanced Computer Science, hereby declare that this report and the work described in it are my own work, unaided except as may be specified below, and that the report does not contain material that has already been used to any substantial extent for a comparable purpose.

Total word count: —

Signed:

Date:

This dissertation is copyright ©2016 Nicholas G. Timmons.

All trademarks used in this dissertation are hereby acknowledged.

Abstract

This is the abstract. Write a summary of the whole thing. Make sure it fits in one page.

Contents

1	Introduction	1
2	Background	3
2.1	What is realism?	4
2.2	Standard Stereo VR Implementations	0
2.3	Vergence-Accommodation Problem Details	1
3	Related Work	3
3.1	Multi-focal viewing	4
4	Methodology	5
5	Multi-focal Theory	7
6	Display Design	9
6.1	Display Requirements	10
6.2	Display Configuration	10
6.2.1	Display distances	10
6.3	Known limitations	11
7	Software Design	13
7.1	Software Requirements	13
7.1.1	Depth Configuration	13
7.1.2	Reflection Depth	14
7.1.3	Rendering costs	14
7.1.4	Simulated DoF	14
7.2	Software Configuration	14
7.2.1	Rotational Consistency	15
7.2.2	OpenGL MRT's	16
7.2.3	X11 Windows controllers and shared contexts	16
7.3	Known limitations	16

8	Evaluation	17
9	Summary and Conclusions	19

List of Figures

2.1	ADD DESCRIPTION	1
6.1	ADD DESCRIPTION	9
6.2	ADD DESCRIPTION	11
7.1	ADD DESCRIPTION	14
7.2	ADD DESCRIPTION	15

List of Tables

Chapter 1

Introduction

This research has been performed to fulfil the requirements of the MPhil Advanced Computer Science course. It is an investigation into the effects of the presence of multiple focal planes, and blending techniques between them, on countering the vergence-accommodation problem which effects a lot of common Virtual Reality (VR) techniques and how it impacts the perceived realism of the images being shown. This is of particular interest in the areas of AR where the user is faced with two conflicting real depths for images appearing to be at the same location.

The aim of this research is to contribute to the knowledge base for VR and Augmented Reality (AR) techniques so that in the future similar techniques and ideas can be used in development of hardware to improve the user experience of 3D displays.

Add some of the results of the work here

It's often useful to bring forward some "highlights" into this chapter (e.g. some particularly compelling results, or a particularly interesting finding).

This report includes a background of current techniques being used for VR/AR and a short overview of similar methods using multi-focal planes. There will then be a breakdown of the requirements for the software and hardware with details of how they have been implemented to achieve our goals. Finally there

is a more in depth analysis of our results and how they can be extended in future work.

Chapter 2

Background

Current trends in VR/AR Brief overview

Stereo displays such as those used for showing 3D movies and in HMD (head mounted displays) which are in use in many commercial products have seen significant improvement over the past decade but still have some large technical and usability problems which could restrict the wide-scale appeal of the products [REF: The zone of comfort...] and do not yet successfully mimic the visual characteristics of the real world so as to be perceived as "real".

When considering the comfort of the user results of many psycho-physical and usability studies have suggested that use of the current solutions can lead to various problems including distortion of perceived depth [REF], visual fatigue [REF], diplopia vision (double vision) and degradation in oculomotor response (adjustment in the eyes). Many factors given for these conditions vary from low quality images such as the high persistence in Oculus Rift, incorrect interocular distances or lack of images to allow the eyes to rest but a major cause that is often mentioned is the discrepancy between the accommodation and vergence when using displays with a fixed distance. In this context accommodation refers to the focusing of the eye when it responds to focus on objects at different distances and vergence is the motion of eyes rotating to bring the convergence point of the visual axis to intersect at the

desired distance of the object. These two oculomotor actions are coupled when looking at an object in the real world but cannot function correctly when shown objects with stereo correspondence at one depth and vergence correspondence at another, which is the general case for objects shown on standard stereo head mounted displays [diagram](#).

Work by [Watt et al](#) has suggested that the breaking of the link between accommodation and vergence cues can lead to a decreased perception of depth, which will effect how the user understands the space they are looking at and that could have an adverse effect on the perceived realism of the space as the scale may appear inconsistent with what the user is accustomed to and are of particular importance to AR environments where the virtual environment is mixed with the real world.

2.1 What is realism?

In the context of this research we are considering realism to consist of many factors. In a perfectly realistic scene the user would not be able to tell the difference between looking a scene in the real world and one that is rendered.

To achieve this we would want a high quality rasterisation of a scene with correct lighting and reflectance within the full colour and intensity range that the human eye can percieve as well as being seen as 3D to the user through correct depth cues.

Within the limited scope of this project we will not be able to develop all of those features but will be focused on improving the realism of a rendered scene through the use of more sophisticated depth cues to measure whether that improves how real the scene appears to the user over a scene which is lacking such cues.

2.2 Standard Stereo VR Implementations

The current standard for VR is shared by a number of commercial hardware implementations. They consist of a head mounted display with the screen split to display a separate image of the scene for each eye and a lens to distort the image to increase the amount of the screen that can be seen and to reduce the "Screen Door Effect" caused by the pixel density. The software is then implemented using the interocular distances of screen in the display with correct field of view and perspective projection.

The correctly calibrated projection of the same scene for the two separate views gives a feeling of depth and "realism" through the user picking up on stereo-correspondences between the two images and perceiving them as a single object at an expected distance.

Since the screen that is being used is a fixed distance from the users eyes at all times the user is always focusing at a fixed distance which is different than the expected distance for the motion and stereo correspondences that is being shown in the scene.

This triggers the mentioned Vergence-Accommodation problem mentioned earlier from a conflict in visual cues. There are some examples of trying to use simulated Depth of Field blur in early VR for very near objects to try and simulate one of the missing visual cues but this was found to induce "Simulation Sickness" and is it now strongly advised against. [cite Unreal talk](#)

[Papers:](#)

[Minification Affects Action-Based Distance Judgments in Oculus Rift HMDs](#)

[Speccifications: A Review Paper on Oculus Rift & Project Morpheus](#)

[Reference system requirements from current state of the art \(75fps etc.\)](#)

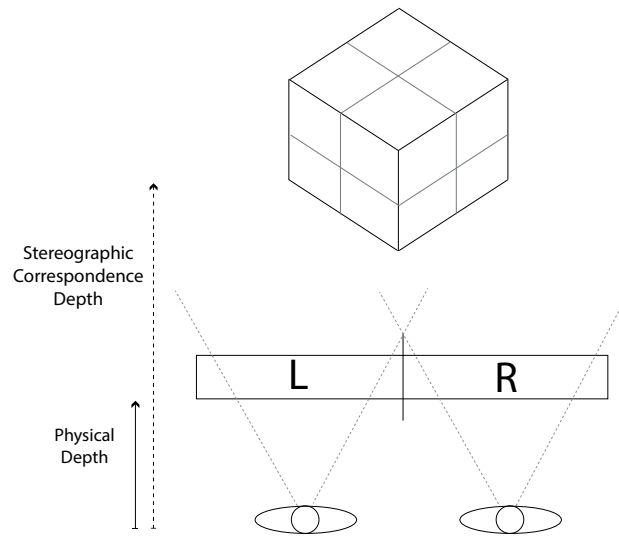


Figure 2.1: ADD DESCRIPTION

2.3 Vergence-Accommodation Problem Details

Papers:

-The zone of comfort: Predicting visual discomfort with stereo displays (2011)
 Immersive stereo displays, intuitive reasoning, and cognitive engineering (2009)
 Vergenceaccommodation conflicts hinder visual performance and cause visual fatigue(2008)

As we can see in the current single plane stereo implementations the Vergence-Accommodation problem poses some issues when we are trying to simulate a real world using only a single focal distance.

While this conflict does have some effect on the comfort of the user REFD the zone of comfort paper, in the area we are looking at we are more interested in the effect this has on how the users perceives the world.

ADD DIAGRAM OF VERGENCE and ACCOMMODATION see Vergenceaccommodation conflicts hinder visual fig.1

It appears that when these visual cues are mismatched the users ability to judge the distance to objects becomes limited, vision can become less clear and the speed at which stereoscopic correspondences are matched is increased. These symptoms can all interfere with the stereoscopic method as it reduces the ability of the user to view create an internal model of the scene correctly.

This will need diagrams - borrow fancy camera and use images to help clarify

Chapter 3

Related Work

Discuss papers:

A Stereo Display Prototype with Multiple Focal Distances (2004) Super multi-view display with a lower resolution flat-panel display An Optical See-Through Head Mounted Display with Addressable Focal Planes A systematic method for designing depth-fused multi-focal plane three-dimensional displays

talk about pixel limitations with regard to requirements of modern setups as well as real distances.

The related work chapter should usually come either near the front or near the back of the dissertation. The advantage of the former is that you get to build the argument for why your work is important before presenting your solution(s) in later chapters; the advantage of the latter is that don't have to forward reference to your solution too much. The correct choice will depend on what you're writing up, and your own personal preference.

3.1 Multi-focal viewing

intraocular distances. Depth perception in the human eye / brain. Optical illusion examples.

Chapter 4

Methodology

Speak about how we want to measure the down sides of the current solutions and how we can compare them to the improved view.

Chapter 5

Multi-focal Theory

Show and describe diagram of splitting the scene. Show linear, box and non-linear methods

Chapter 6

Display Design

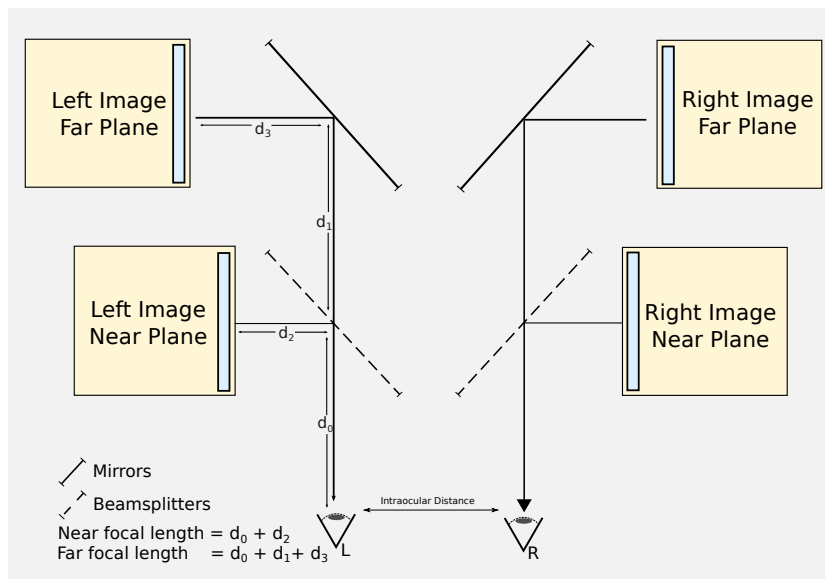


Figure 6.1: ADD DESCRIPTION

The display will be designed to allow for two real focal depths per eye in a configurable display to allow for testing of different depths.

To achieve this we will be using four high resolution displays [ref ipad displays] to get maximum quality in rendering per view.

That gives us a near and far display per eye. The images on each display is

seen through a 50/50 beam-splitter which merges the two images into one. See fig [layout](#) for a more detailed description of the physical layout.

As the image is merged through the beamsplitter it is essentially adding the values of the two screens. To ensure a clear image of both views we need to isolate the beamsplitter, mirrors and all screens from external light to prevent it obscuring or offsetting colour as it is merged towards the eye. To attain this we will be shielding the constructed display with matte black boards to prevent any light entering the system from outside and to reduce internal reflectance.

An extra consideration for combining the images and maintaining stereoscopic correspondences is that each of the images being displayed on each screen must be matching in colour range and intensity when they reach the eye. This will mean that the displays will have to be calibrated for any differences in the displays or error from light absorption from the mirrors or beam-splitter.

6.1 Display Requirements

Focal ranges. Number of screens for depth levels. Distances between mirrors and alignment

6.2 Display Configuration

Physical implementation and constraints to meet the requirements. Limitations with multiple monitors at different distances compared to headmounted displays.

6.2.1 Display distances

Add maths for calculating distance based on dioptries. Assumptions about

parallel rays beyond far distance

Near Focal Distance	54cm — 2 Dioptres
Far Focal Distance	81cm — 1 Dioptres
Intraocular Distance	6.5cm ref

6.3 Known limitations

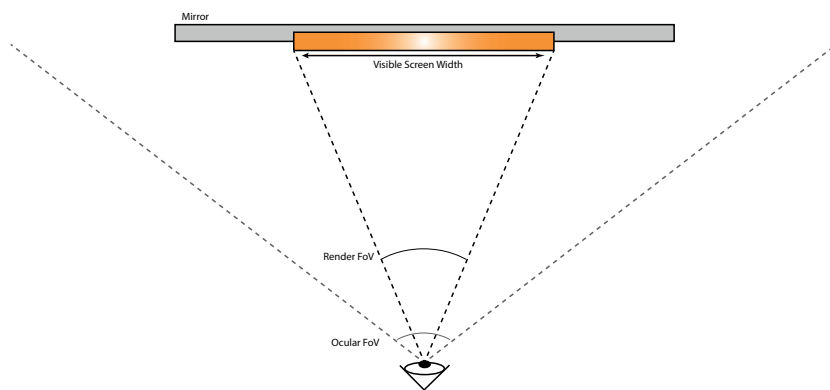


Figure 6.2: ADD DESCRIPTION

Limited eye coverage (low FOV). As our screens will only have a FoV of **x** we are limited in our ability to give as full effect as a head mounted display, rather it will look like peering through a window into another room. This may have an effect on the perceived realism.

Large display. The size of the rendered screen from the view point is limited to the size of the screen at the furthest distance. This means that if we want to have a display which covers all of the user view then the screen would have to be of the correct size to cover the full view at the given focal distance. In our display because we are using Ipad displays we are limited to quite a small view of the scene due to the limited size. **This could be overcome with magnification ?**

Lacks benefits of head mounted displays As this display is desk mounted instead of head mounted we lose the ability to do head tracking and rotation which can help a user feel a part of the scene. The fixed view point means

we need to use motion of the scene rather than motion of the user. If user movement was possible it would have been particularly useful for measuring how small motions may help determine depth.

plus others

Chapter 7

Software Design

What we want the custom software to be able to emulate to meet the goals in the methodology.

7.1 Software Requirements

Four render outputs - One per screen Full standard rendering support - To be able to support objects to test depth + textures and what have you. Configurable positions for each screen - For alignment. Depth blending methods - Linear, box, non-linear, clamped. Adjustable scene depth planes - to allow testing of mismatch.

7.1.1 Depth Configuration

Explain how we will be configuring the software to match the depth of the physical scene and alignment.

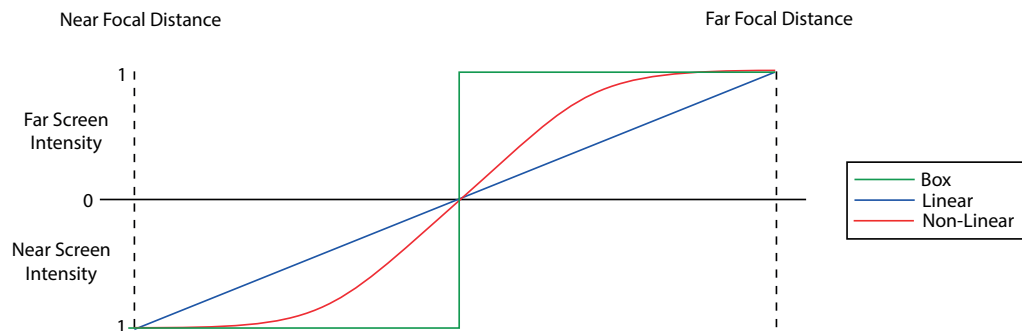


Figure 7.1: ADD DESCRIPTION

7.1.2 Reflection Depth

Specular rays are from a different depth than the surface reflecting them. We wont handle this.

7.1.3 Rendering costs

Talk about shared contexts.

7.1.4 Simulated DoF

Explain which method we will implement to get the fake effect used in standard stereo setups.

7.2 Software Configuration

Which blend methods were used? How will it accommodate different people. What problems will it overcome (colour correction, etc).

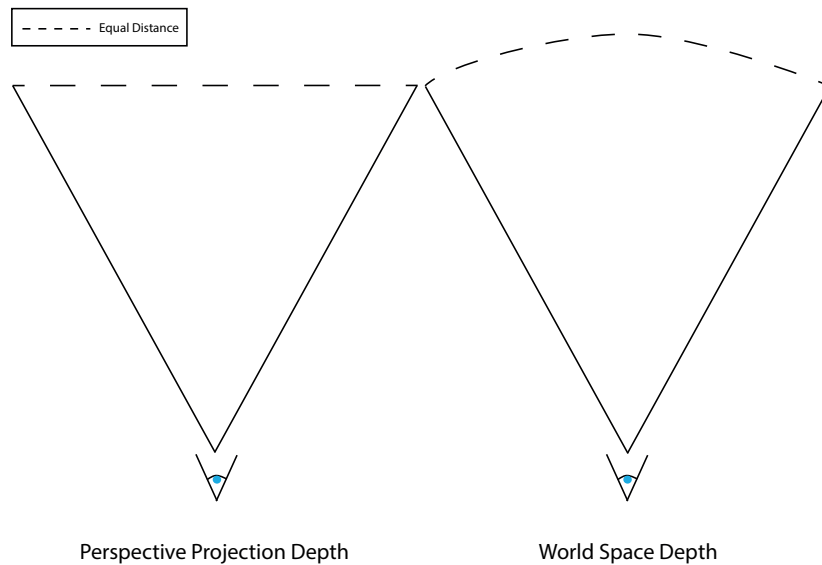


Figure 7.2: ADD DESCRIPTION

7.2.1 Rotational Consistency

The depth that is produced from a standard projection matrix is not the real world scene depth. The non-linear divide gives a non-linear depth from zero to one when what we need for calculating depth is the real distance from the ocular centre to the point in the scene. The perspective depth also gives all points at the far plane an equal distance from the camera, as shown in fig [fig dist](#) which causes changes in depth as the screen is rotated as points move from being on the edge of the far plane to the centre.

To calculate accurate depth, we will be using the objects positions multiplied by the world matrix to get its world coordinates and then subtract from them the position of the camera and calculate the length of the resulting ray.

This will give us a linear depth to each rendered point in the scene.

get screen shot of different depths!

Depth has to be distance from the eye position, not distance in view space.
Show comparison of different depths.

7.2.2 OpenGL MRT's

The hardware setup has two GPUs powering four screens in a non-SLI configuration. As we are not able to share data between the two GPUs we are forced to render the scene at least twice. As this is also a requirement of rendering stereo views without reprojection [ref] this is not a limiting factor.

In order to take advantage of the data sharing we do have available we are making use of multiple render targets in our shaders so that we only process the vertex data once per eye and then in pixel shader we perform our depth calculation and write the appropriate blend of the lighting value to separate render targets representing the near or far screen. This limits our lighting calculations to once per eye and by running through the same GPU and OpenGL context we can be more sure of matching VSync on both screen so we are less likely to suffer from screen mismatches from the screens not being synchronised.

This is more of a factor for matching the views between each eyes as we currently have no method to ensure that the left and right views are refreshing on the same schedule. To overcome this, we are using screens with a high refresh rate and low persistence and ensuring the test scenes are running above the recommended 75fps [ref] so that even if they are out of synch the distance between the two scenes should be low enough to be imperceivable by the human eye.

7.2.3 X11 Windows controllers and shared contexts

Explain constraints on Linux. The approach we used to windows and how they are being used through the X11 screen system and why.

7.3 Known limitations

Wasted render time. Not very extensible. Fixed setup.

Chapter 8

Evaluation

For any practical projects, you should almost certainly have some kind of evaluation, and it's often useful to separate this out into its own chapter.

What are the results? How did it perform? GRAPHS.

Chapter 9

Summary and Conclusions

Mention if it reduced the vergence problem. Mention if it appeared more real. Which blend methods were convincing? Was alignment consistent and believable?

potential future work.