


+557.3921V = 1.5  
-557.3921V = -1.5  
入力R相電圧検出


+599V=1.63  
-599V=-1.63

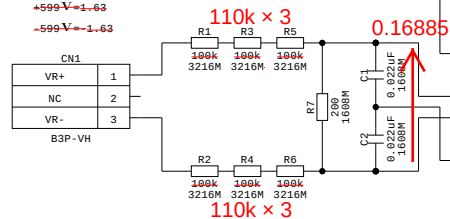

AMC1301DWVR

+557.3921V = 1.5  
-557.3921V = -1.5  
入力S相電圧検出


+599V=1.63  
-599V=-1.63

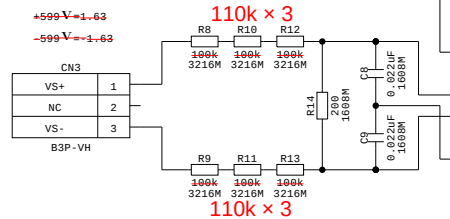

AMC1301DWVR

+557.3921V = 1.5  
-557.3921V = -1.5  
入力T相電圧検出

+599V=1.63  
-599V=-1.63

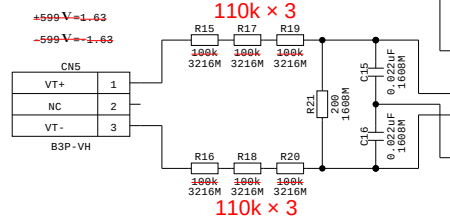

AMC1301DWVR

絶縁

|     |                         |                 |                |                       |                   |                                                                                                                                  |                                                                                               |
|-----|-------------------------|-----------------|----------------|-----------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| REV | 年月日<br>DATE<br>19/07/16 | 変更者<br>CHNG. BY | 承認<br>APPR. BY | 設計変更<br>DESIGN CHANGE | 機種<br>MODEL       | 名称<br>NAME<br>K19170-2_Isolated_voltage_detection_board_ver_1.0<br>K19170-2_Isolated_voltage_detection_board_ver_2.0_cir.901.sht | 図番<br>FIG. NO.<br>001.sht<br>N P E<br>Nagaoka Power electronics<br>ページ<br>PAGE<br>Page 1 of 1 |
| REV | 年月日<br>DATE<br>19/07/16 | 変更者<br>CHNG. BY | 承認<br>APPR. BY | 設計変更<br>DESIGN CHANGE | 設計<br>DESIGNED BY | 検出<br>CHECKED BY                                                                                                                 | 承認<br>APPROVED BY                                                                             |