



A34002 Beacon, Avant

- With this instruction the beacon can be assembled on a Avant loader
- This is a retrofit instruction



A34002 Beacon, Avant 500

- Before assembling make sure that you find all of the components listed below in your retrofit kit
 - A49059 Bracket, beacon
 - 64978 Beacon
 - 73122 x2 Washer M8
 - 72320 Hexagonal nut M8
 - 72143 hexagonal screw M8x80
 - 65058 Bracket pin, beacon
 - A49080 Cover strip, side
 - 74768 x3 Washer M6
 - 74767 x3 Raised countershun headscrew M6x20
 - 65065 Switch beacon
 - A34003 Wire harness beacon




A34002 Beacon, Avant 500

- Start the assembly by removing the right side cover and the cupholder
- When the cover is removed you can wash loaders right side to make the assembly easier

A34002 Majakka, Avant 500

- Beacon pin will be attached to beacon bracket
- Wire harness is routed trough the control panel to safety canopy

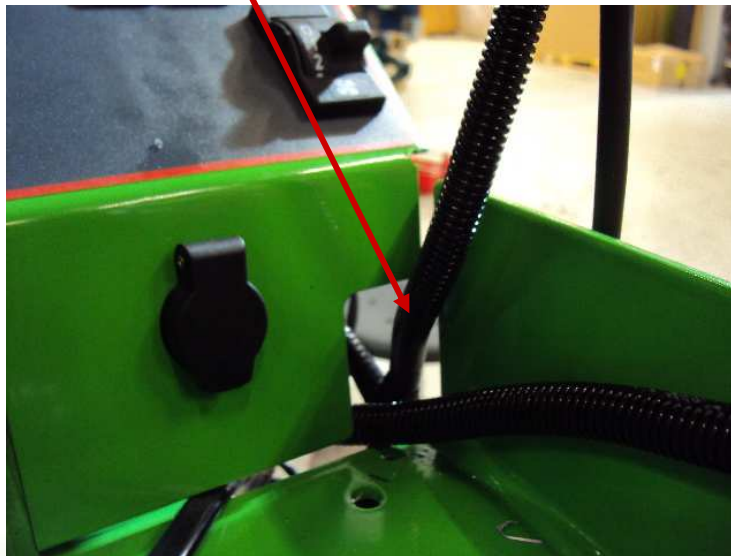


A34002 Beacon, Avant 500

- Beacon is attached to beacon pin
- The wire harness is attached to beacon pin





A34002 Beacon, Avant 500

- Wires for beacon will be attached to beacon pin
- Red wire will be attached to middle one
- Black wire will be attached to beacon pin frame and grounds the beacon
- When tightening the pin to the bracket you need to hold the pin on its place and rotate the bracket
- When you do it like that the wires won't break or they don't go crossways

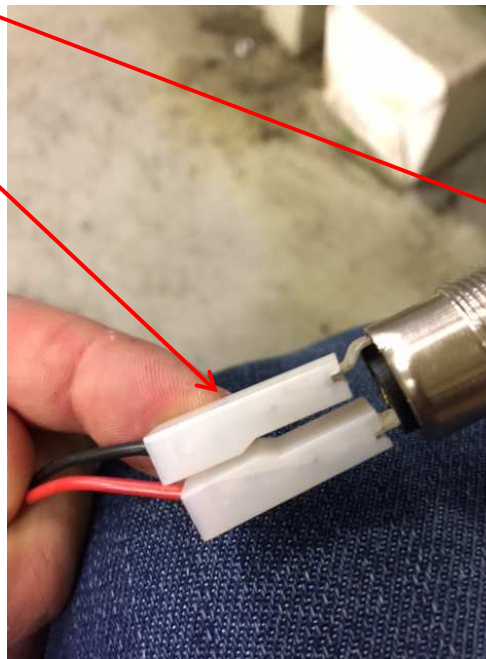


A34002 Beacon, Avant 500

- Control switch will be attached to the middle of the control panel
- Control panels precutted pieces can be removed with stanley knife and plyers
- With stanley knife you can cut the decal and with plyers you can remove the piece

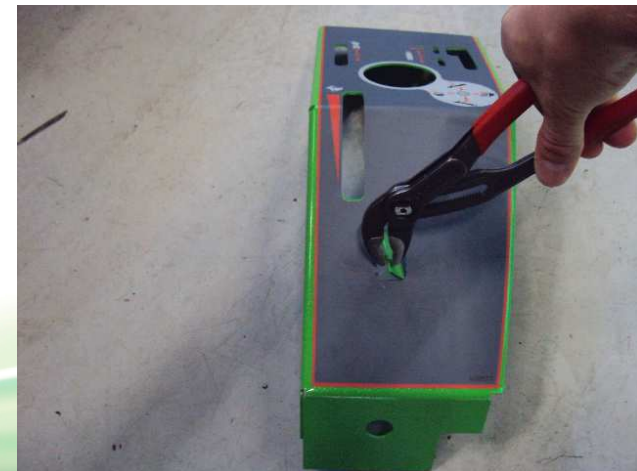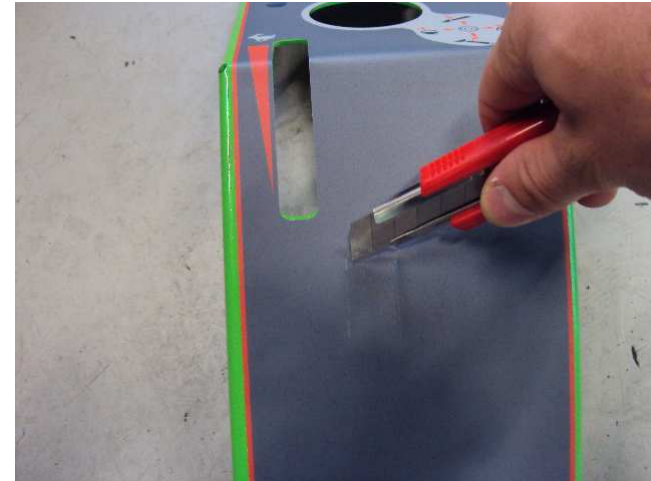

A34002 Beacon, Avant 500

- Loaders grounding point in front frame under the hydraulic oil cooler
- Beacon wire harnesses grounding wire will be attached here

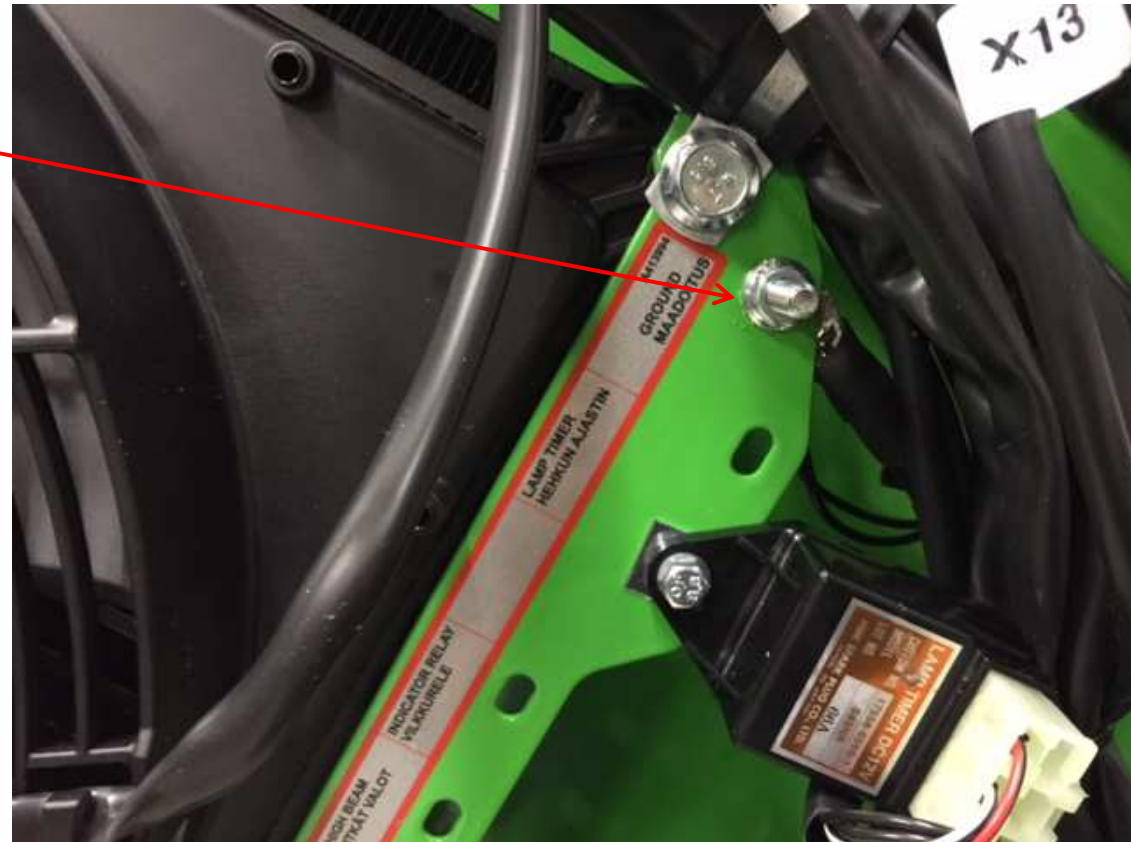

A34002 Beacon, Avant 500

- Beacons wire harness will be attached to fusebox to road traffic kits fuse
- Fuse is 25A
- Make sure to connect to the fused side of the connection bar.



A34002 Majakka, Avant 500

- Then attach the cover strip to safety canopy and cover the wire harness
- Attach the cupholder to it's place
- Test drive the beacon
- If everything works as it should you can attach the right side cover

