





1. Fit the water pump to its bracket (14) with bolts (20), washers (21, 22) and nuts (23).

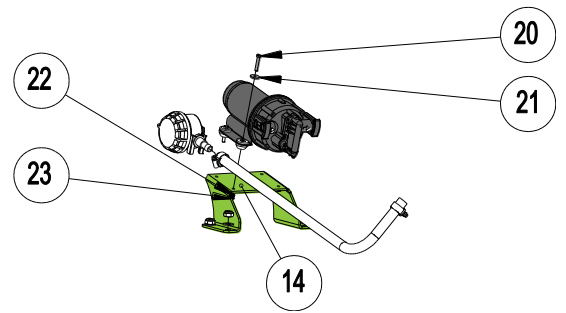

2. Install the filter for the water pump (17) to the side of the water pump, install angled fitting (18), and water hoses (14, 16) with hose clamps as shown in figures.
3. Lift the water pump assembly onto the middle of the square beam at the rear frame of the horse arena harrow, and fix the water pump assembly with U-bolts (2), washers (12), and nuts (6).
4. Install the water hose fitting (7) to the water tank.
5. Fit water hoses to the spraying tube and water tank with hose clamps (10).

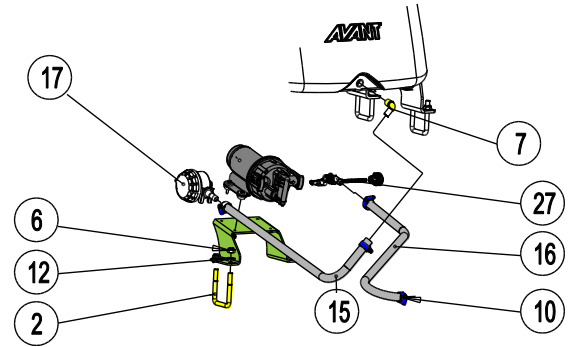

6. Align the installation brackets (5) with the installation holes of the water tank and install brackets (3, 8) to the tank with bolts (9) and spacers (13).
7. Lift the water tank with its brackets onto the middle of the frame of the horse arena harrow, and fix with U-bolts (2), spacers (12) and nuts (6) to the two front square beams of the frame.
8. Fit the water hoses and the electric cable of the water pump with cable ties to the middle area of the frame.

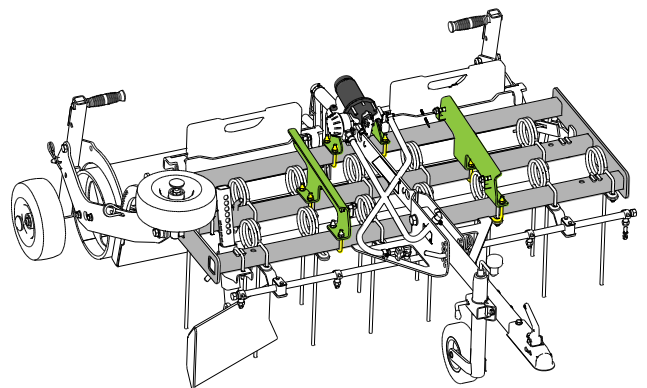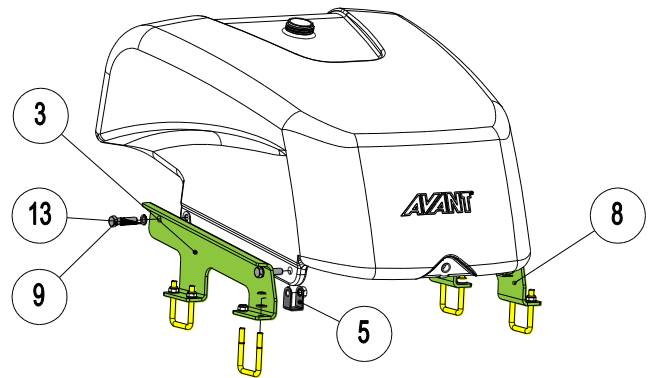

9. Replace 3 brackets at the front tines of the horse arena harrow, holding the U-bolts of tine assembly, with brackets for the spraying tube.
10. Fit the spraying tube (19) onto its brackets with pipe clamps.

