


OUTLINE DIMENSIONS

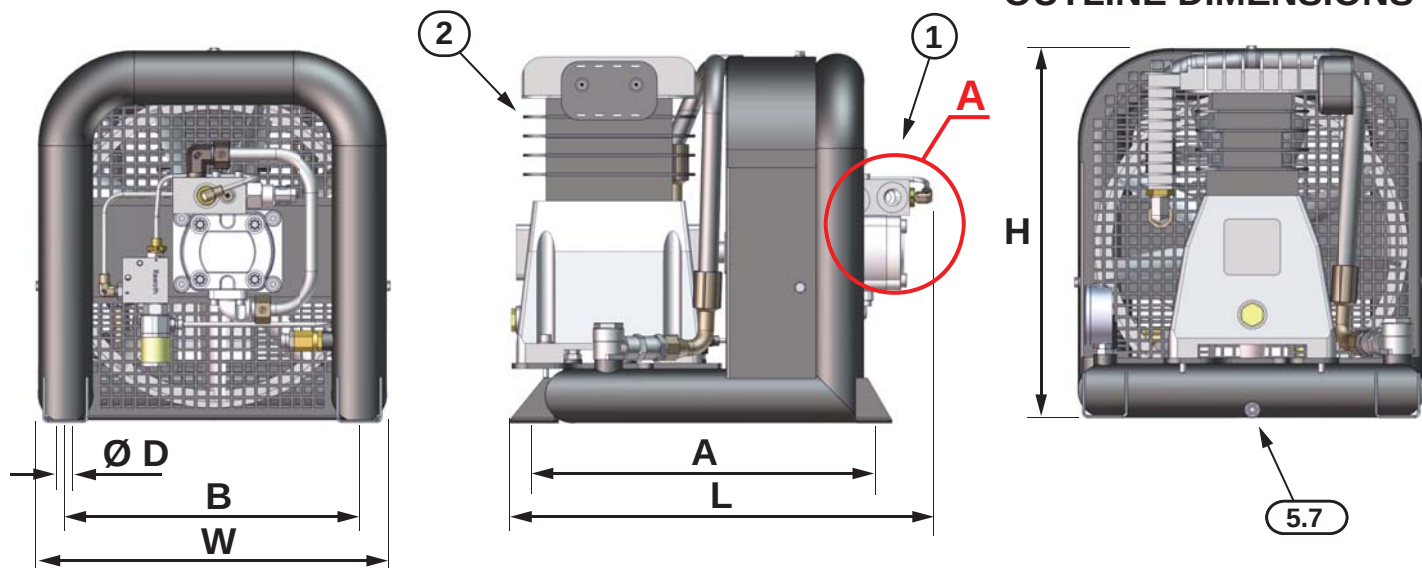

MODEL	DIMENSIONS, mm							WEIGHT	OIL FILL
	L	W	H	A	B	C	D	kg	l
HK 400/8 - 23_PNE	475	400	415	395	325	-	11	37	0,9



Compact complete compressor equipped frame-integrated tank, oil separator, automatic speed valve and pneumatic cut-off features make Dynaset compressor reliable and productive.

Dynaset HK Hydraulic compressor gives high quality efficient compressed air to different kinds of applications; Pneumatic tools, air flushing on drilling rigs, tire filling from service vans, cleaning in crushers and farming machines.

HYDRAULIC FLOW	l/min, max.	40
HYDRAULIC PRESSURE	bar, max.	250
AIR FLOW	l/min, max.	400
AIR PRESSURE	bar, max	8
WEIGHT	kg	37

HYDRAULIC AND COMPRESSED AIR CONNECTIONS

CONNECTIONS			
HYDRAULICS			COMPRESSED AIR
P pressure	T return	D drain	AP
BSP 1/2"	BSP 1/2"	-	BSP 1/2"

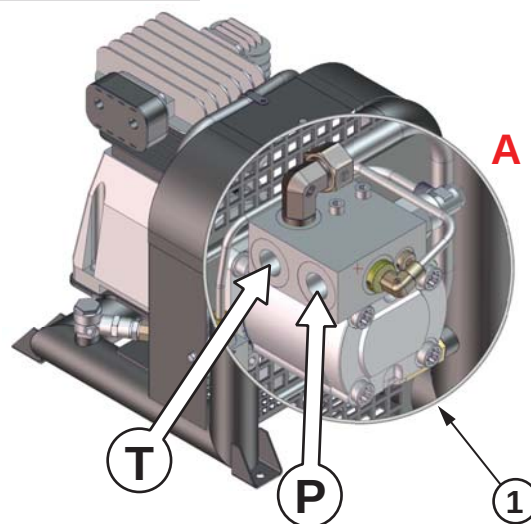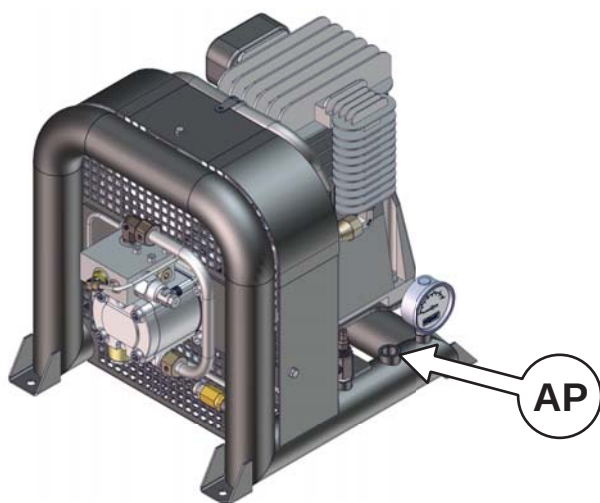


This exploded view diagram illustrates the assembly of a hydraulic motor. The components are identified by the following numbered callouts:

- 1.**: Hydraulic motor unit.
- 1.1.3**, **1.1.4**, **1.1.5**: Fittings and connectors for the motor's ports.
- 2.1**, **2.2**, **2.3**, **2.4**, **2.4.1**: Components of the drive shaft assembly, including the shaft, pulley, and mounting brackets.
- 3.8**, **3.8.1**, **3.8.2**: Components of the drive pulley assembly, including the pulley wheel and mounting hardware.
- 4.**: Hydraulic line assembly with a pressure gauge and hose.
- 5.1**, **5.3**, **5.4**, **5.5**, **5.6**, **5.7**: Components of the motor housing and mounting base, including the housing, base plate, and various fasteners.

This diagram illustrates the exploded view of a hydraulic cylinder assembly. The main components are labeled as follows:

- 1.1**: Main cylinder body.
- 1.2.1**: Piston rod end cap.
- 1.2.2**: Piston rod end seal assembly.
- 1.2.3**: Piston rod end nut.
- 1.2.4**: Piston rod end seal.
- 1.2.5**: Piston rod end seal.
- 1.2.6**: Piston rod end seal.
- 1.2.7**: Piston rod end seal.
- 1.2.8**: Piston rod end seal.
- 1.2.9**: Piston rod end seal.
- 1.3**: Piston rod end cap.
- 1.3.1**: Piston rod end seal.
- 1.3.2**: Piston rod end seal.
- 1.3.3**: Piston rod end seal.
- 1.4**: Piston rod end cap.
- 1.4.1**: Piston rod end seal.
- 1.4.2**: Piston rod end seal.
- 1.4.3**: Piston rod end seal.
- 1.1.1**: Piston rod end seal.
- 1.1.2**: Piston rod end seal.
- 1.1.3**: Piston rod end seal.

COMPR. BLOCK TUBE ASSEMBLY

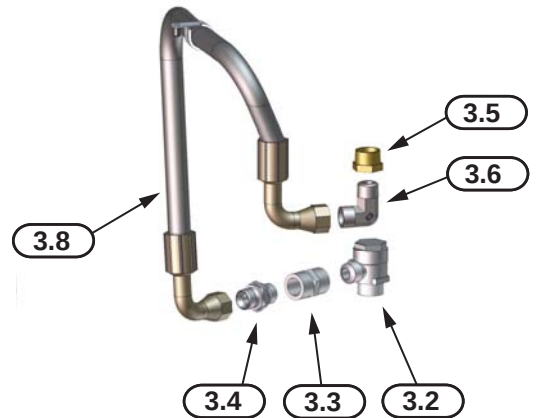

This exploded view diagram illustrates the assembly of the 1.2.1 component. The main assembly, labeled 1.2.1, is a rectangular metal block with a complex internal structure. It features a top flange with a central circular opening and a side flange with a smaller circular opening. A brass-colored fitting, labeled 4.11, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.10, is shown being inserted into the top flange. A brass-colored fitting, labeled 4.9, is shown being inserted into the top flange. A brass-colored fitting, labeled 4.5, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.4, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.1, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.2, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.3, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.15, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.13, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.14, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.12, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.6, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.7, is shown being inserted into the side flange. A brass-colored fitting, labeled 4.8, is shown being inserted into the side flange.

[illegible]

NO	CODE	DESIGNATION	DETAILS	HK 400/8-23
1	D100104270	HYDRAULIC MOTOR ASSEMBLY		
1.1	0700110060	HYDRAULIC MOTOR	16R	1
1.1.1	V100103160	SHAFT SEAL, COMPLETE	17x30	1
1.1.2	V100103300	SNAP RING	30	1
1.1.3	8500412300	ALLEN SCREW	M8x30	4
1.1.4	8500905800	NUT NYLOC	M8	4
1.1.5	8107196000	HALF COUPLING, MOTOR SIDE	H86-2r	1
1.2	0709011181	RPM-VALVE BLOCK ASSEMBLY	3007D	1
1.2.1	0700031435	RPM-VALVE BLOCK		1
1.2.2	0700001144	RPM-CARTRIDGE	FLC-1	1
1.2.4	1702015000	ELBOW FITTING	15L RK1/2 DIN	1
1.2.5	2204104000	O-RING 15		1
1.2.6	1702690000	PLUG	HF R1/8	1
1.2.8	1309010276	CHECK VALVE COMPLETE	R1/4	1
1.2.9	8500410000	ALLEN SCREW	M6x50	4
1.3		RETURN LINE FLANGE COMPLETE	15L RK1/2 DIN	1
1.3.1	8500409400	ALLEN SCREW	M6x20	4
1.3.2	1100101000	SUCTION FLANGE FITTING	15	1
1.3.3	2204134000	O-RING 24		
1.4	0700001445	RETURN PIPE ASSEMBLY, COMPLETE	D15x171x45	1
1.4.1	8707778000	PIPE	15x1,5 ST37,4	1
1.4.2	1701856000	FERRULE	15	2
1.4.3	1701870000	NUT 15L	M22x1,5	2
2		COMPRESSOR BLOCK, ASSEMBLY		1
2.1	7106811000	COMPRESSOR BLOCK	HK400	1
2.2	8500412500	HEX SCREW	M8x40	4
	8501126000	WASHER	8,4x16	4
2.3	0600040576	BLOWER WHEEL	HK400	1
2.4	0600040575	HALF COUPLING COMPRESSOR SIDE	86	1
2.4.1	8500584230	ALLEN SCREW	M10x12	2
2.5.1	8107214000	RUBBER ELEMENT	H86	1
3.2	7306953000	CHECK VALVE	R3/4" x 1/2"	1
3.3	1702520000	ADAPTER	1/2"	1
3.4	17024xxxxx	ADAPTER	1/2"u 1/2"u	1
3.5	1702940000	FITTING	RK3/4u-1/2s	1
3.6	1702370000	ELBOW FITTING	R1/2xRK1/2	1
3.8		COMPR. BLOCK TUBE ASSEMBLY	R08-90/08-520-1-N/R08-90/45	1
3.8.1	8307652400	HOSE CLAMP	22	1
3.8.2	8500006000	HEX SCREW	M6X20	2
4.		PNE ASSEMBLY		1
4.1	1300551000	BODY CARTRIDGE	2/2 3/8"	1
4.2	1300545000	VALVE CARTRIDGE	2/2 NC 25lpm	1
4.3	1701880000	ELBOW FITTING	06L R1/8	1
4.4	1702920000	REDUCER	RK3/8u-1/8s	1
4.5	1701940000	ELBOW FITTING	06L RK1/8	1
4.6		TUBE 6X1		m
4.7		BANJO FITTING	6L	1
4.8		BANJO SCREW	UNF 3/8-24	1
4.9	1702925000	REDUCER	RK3/8u-1/4s	1
4.10	1701885000	FITTING	06L RK1/4	1
4.11	1701940000	ELBOW FITTING	06L RK1/8	1
4.12		TUBE 6X1		m
4.13	7306986000	PILOT VALVE	R1/4", 4-12bar	1
4.14	1702925000	REDUCER	RK3/8u-1/4s	1
4.15		TUBE 6X1		m
5.		COMPRESSOR FRAMEWORK		1
5.1	0600041598	AIR RESERVOIR	4.4L	1
5.2	0600041618	BLOWER GUARD	HK400	1
5.3	8500006000	HEX SCREW	M6X20	2
5.4	7306971500	SAFETY VALVE	3/8s	1
5.5	1501304000	PRESSURE GAUGE, DAMPENED	RK1/4	1
5.6	1702925000	REDUCER	RK3/8u-1/4s	1
5.7	7106945000	WATER DRAIN VALVE	1/4"u	1

PARAMETERS		HK 400 /8 - 23_PNE
DISCHARGE CHARACTERISTICS		
Flow rate at ref. conditions, max. l/min		400 *
Maximum pressure	bar	8
COMPRESSED AIR CONNECTION	AP	BSP 1/2"
HYDRAULIC CONNECTIONS		
Pressure line	P	BSP 1/2"
Return line	T	BSP 1/2"
FRAME RESERVOIR	I	4,4
HYDRAULIC POWER REQUIREMENTS		
Minimum flow	l/min	12
Maximum flow	l/min	40
Pressure at nominal flow	bar	210
Maximum pressure	bar	250
Pressure when unloaded	bar	50
HYDRAULIC FLUID REQUIREMENTS		
Viscosity	cSt	10 - 200 / optimi 25 - 35
Temperature	°C	max. 70 **
Filter ratio, recommendation	um	min. 25
Cooling capacity, recommend. min	kW	2
OVERALL DIMENSIONS		
Length	mm	455
Width	mm	390
Height	mm	415
Weight	kg	37
* According to ISO 1217 (1996) at discharge pressure of 6 bar.		
** Ref. to HYDRAULIC FLUIDS		