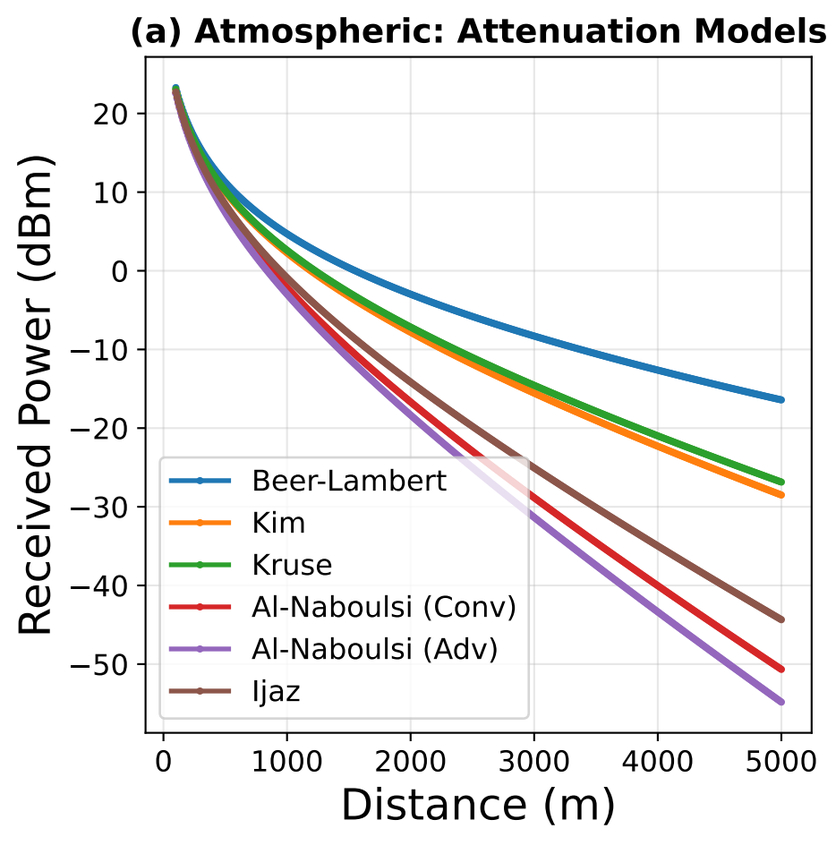
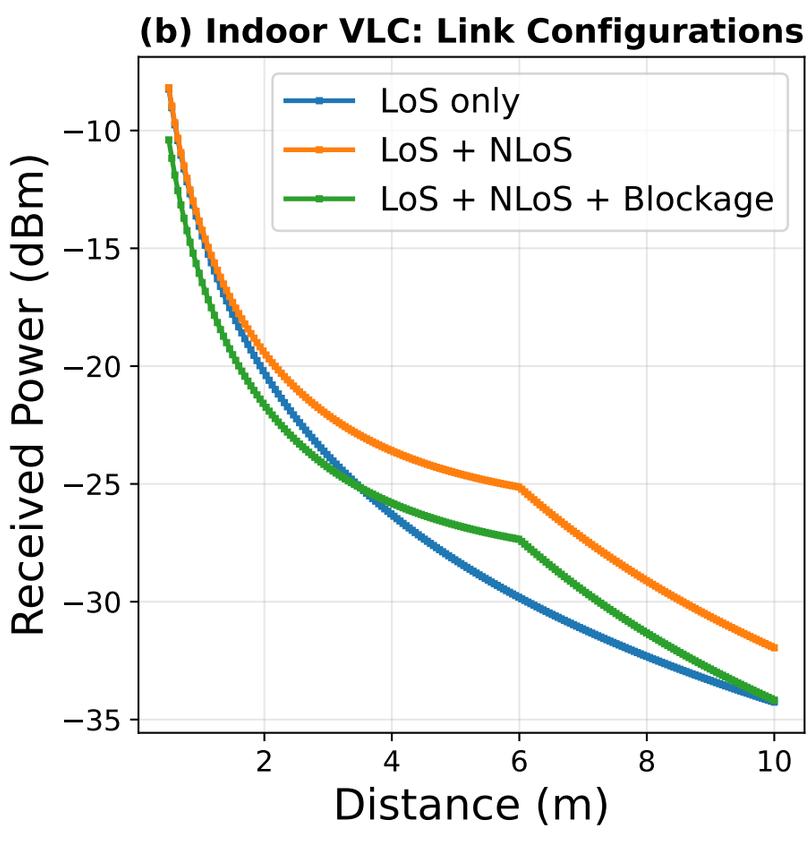
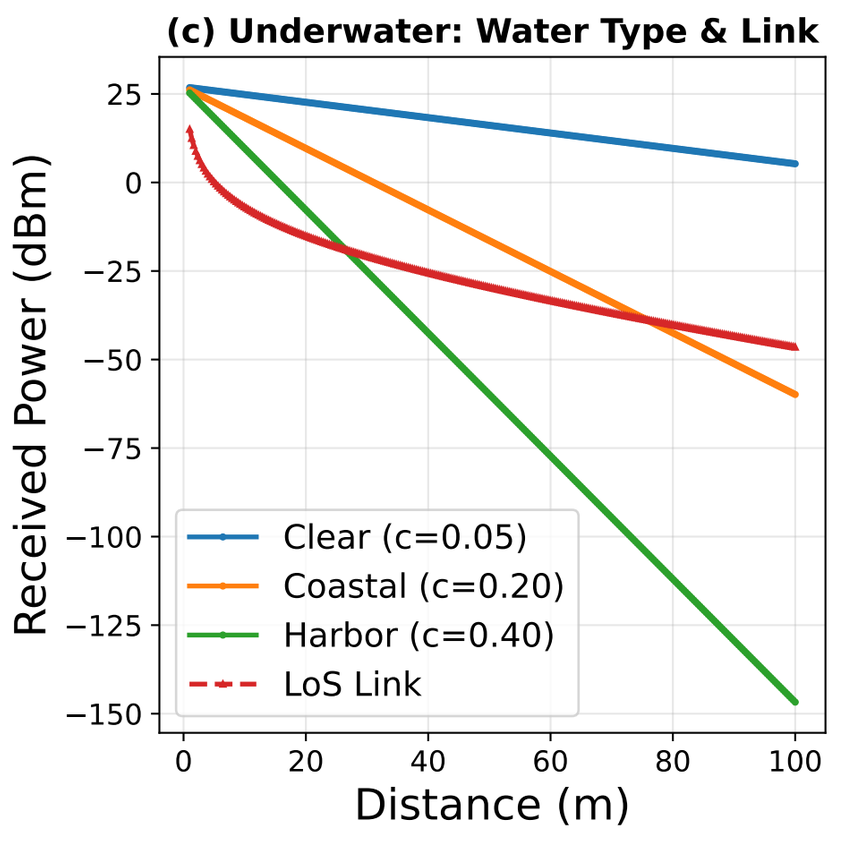
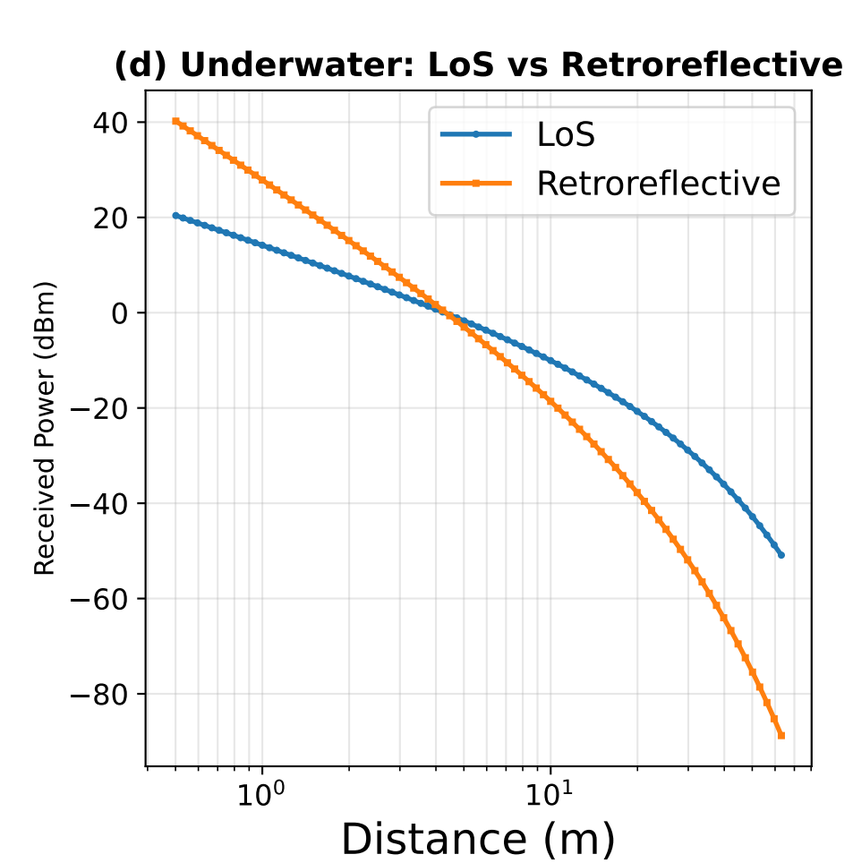
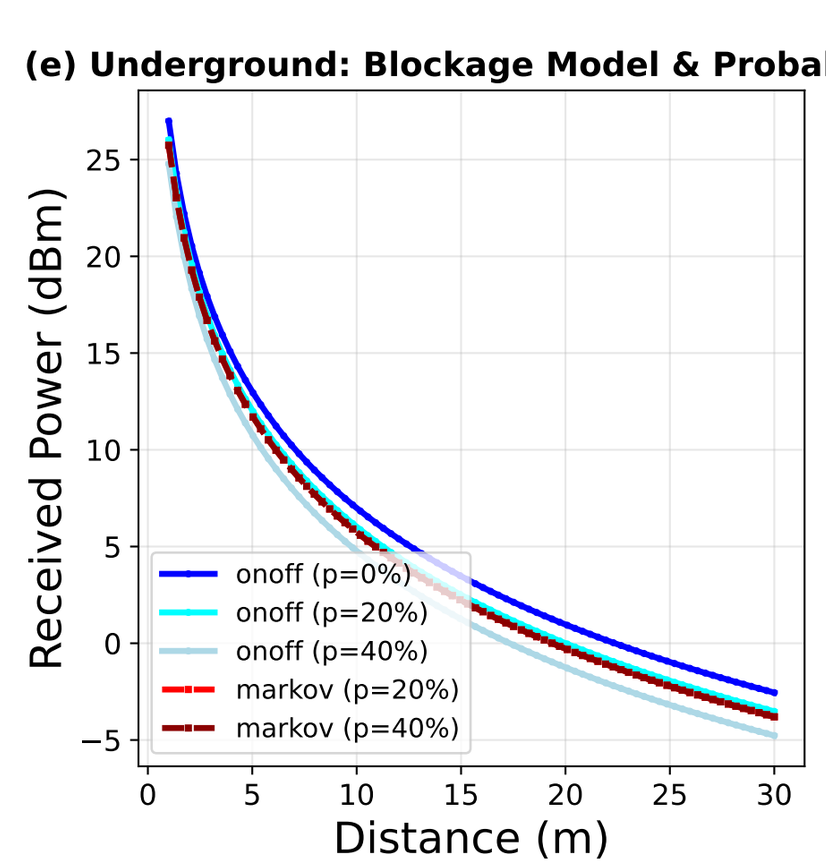
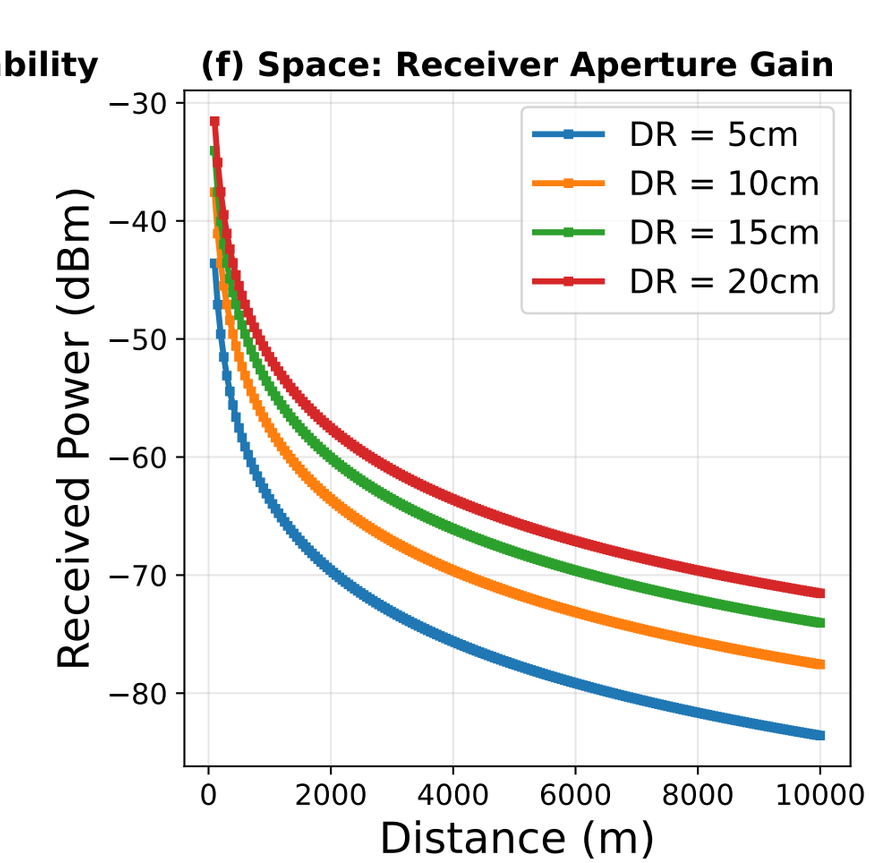

(a) Atmospheric: Attenuation Models
Received Power (dBm)
Distance (m)
Beer-Lambert
Kim
Kruse
Al-Naboulsi (Conv)
Al-Naboulsi (Adv)
Ijaz


(b) Indoor VLC: Link Configurations
Received Power (dBm)
Distance (m)
LoS only
LoS + NLoS
LoS + NLoS + Blockage


(c) Underwater: Water Type & Link
Received Power (dBm)
Distance (m)
Clear (c=0.05)
Coastal (c=0.20)
Harbor (c=0.40)
LoS Link


(d) Underwater: LoS vs Retroreflective
Received Power (dBm)
Distance (m)
LoS
Retroreflective


(e) Underground: Blockage Model & Probability
Received Power (dBm)
Distance (m)
onoff (p=0%)
onoff (p=20%)
onoff (p=40%)
markov (p=20%)
markov (p=40%)


(f) Space: Receiver Aperture Gain
Received Power (dBm)
Distance (m)
DR = 5cm
DR = 10cm
DR = 15cm
DR = 20cm