

NetX Duo™

Simple Network Management Protocol Agent
for NetX Duo (NetX Duo SNMP)

User Guide

Renesas Synergy™ Platform
Synergy Software
Synergy Software (SSP) Component

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corp. without notice. Please review the latest information published by Renesas Electronics Corp. through various means, including the Renesas Electronics Corp. website (<http://www.renesas.com>).

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

Renesas Synergy Specific Information

If you are using NetX Duo SNMP for the Renesas Synergy platform, please use the following information.

Installation

Page 17: If you are using Renesas Synergy SSP and the e² studio ISDE, NetX Duo SNMP will already be installed. You can ignore the NetX Duo SNMP Agent Installation section.



**Simple Network Management Protocol
Agent for NetX Duo
(NetX Duo SNMP)**

User Guide

Express Logic, Inc.

858.613.6640
Toll Free 888.THREADX
FAX 858.521.4259

www.expresslogic.com

©2002-2018 by Express Logic, Inc.

All rights reserved. This document and the associated NetX software are the sole property of Express Logic, Inc. Each contains proprietary information of Express Logic, Inc. Reproduction or duplication by any means of any portion of this document without the prior written consent of Express Logic, Inc. is expressly forbidden. Express Logic, Inc. reserves the right to make changes to the specifications described herein at any time and without notice in order to improve design or reliability of NetX. The information in this document has been carefully checked for accuracy; however, Express Logic, Inc. makes no warranty pertaining to the correctness of this document.

Trademarks

NetX, Piconet, and UDP Fast Path are trademarks of Express Logic, Inc. ThreadX is a registered trademark of Express Logic, Inc.

All other product and company names are trademarks or registered trademarks of their respective holders.

Warranty Limitations

Express Logic, Inc. makes no warranty of any kind that the NetX products will meet the USER's requirements, or will operate in the manner specified by the USER, or that the operation of the NetX products will operate uninterrupted or error free, or that any defects that may exist in the NetX products will be corrected after the warranty period. Express Logic, Inc. makes no warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose, with respect to the NetX products. No oral or written information or advice given by Express Logic, Inc., its dealers, distributors, agents, or employees shall create any other warranty or in any way increase the scope of this warranty, and licensee may not rely on any such information or advice.

Part Number: 000-1054
Revision 5.11

Contents

Chapter 1 Introduction to NetX Duo SNMP	5
NetX Duo SNMP Agent Requirements	5
NetX Duo SNMP Constraints	6
SNMP Object Names	6
SNMP Manager Requests	7
NetX Duo SNMP Agent Traps	8
NetX Duo SNMP Authentication and Encryption	9
NetX Duo SNMP Community Strings	10
NetX Duo SNMP Username Callback	10
NetX Duo SNMP Agent GET Callback	12
NetX Duo SNMP Agent GETNEXT Callback	13
NetX Duo SNMP Agent SET Callback	14
Changing SNMP Version at Run Time	15
SNMPv3 Discovery	15
NetX Duo SNMP RFCs	16
Chapter 2 Installation and Use of the NetX Duo SNMP Agent	17
Product Distribution	17
NetX Duo SNMP Agent Installation	17
Using the NetX Duo SNMP Agent	17
Small Example System	18
Configuration Options	26
Chapter 3 Description of SNMP Agent Services	29
nx_snmp_agent_auth_trap_key_use	34
nx_snmp_agent_authenticate_key_use	35
nx_snmp_agent_community_get	36
nx_snmp_agent_request_get_type_test	37
nx_snmp_agent_context_engine_set	38
nx_snmp_agent_context_name_set	40
nx_snmp_agent_create	41
nx_snmp_agent_current_version_get	43
nx_snmp_agent_private_string_test	44
nx_snmp_agent_public_string_test	45
nx_snmp_agent_version_set	46
nx_snmp_agent_private_string_set	48
nx_snmp_agent_public_string_set	49
nx_snmp_agent_delete	50
nx_snmp_agent_set_interface	51
nx_snmp_agent_md5_key_create	52
nx_snmp_agent_priv_trap_key_use	53
nx_snmp_agent_privacy_key_use	54
nx_snmp_agent_sha_key_create	55

nx_snmp_agent_start.....	56
nx_snmp_agent_stop	57
nx_snmp_agent_trap_send	58
nxd_snmp_agent_trap_send	60
nx_snmp_agent_trapv2_send	62
nx_snmp_agent_trapv2_oid_send	64
nxd_snmp_agent_trapv2_send	66
nxd_snmp_agent_trapv2_oid_send	68
nx_snmp_agent_trapv3_send	70
nx_snmp_agent_trapv3_oid_send	72
nxd_snmp_agent_trapv3_send	74
nxd_snmp_agent_trapv3_oid_send	76
nx_snmp_agent_v3_context_boots_set	78
nx_snmp_object_compare	79
nx_snmp_object_copy	80
nx_snmp_object_counter_get	81
nx_snmp_object_counter_set	82
nx_snmp_object_counter64_get	83
nx_snmp_object_counter64_set	84
nx_snmp_object_end_of_mib	85
nx_snmp_object_gauge_get	86
nx_snmp_object_gauge_set	87
nx_snmp_object_id_get	88
nx_snmp_object_id_set	89
nx_snmp_object_integer_get	90
nx_snmp_object_integer_set	91
nx_snmp_object_ip_address_get	92
nx_snmp_object_ipv6_address_get	93
nx_snmp_object_ip_address_set	94
nx_snmp_object_ipv6_address_set	95
nx_snmp_object_no_instance	96
nx_snmp_object_not_found	97
nx_snmp_object_octet_string_get	98
nx_snmp_object_octet_string_set	99
nx_snmp_object_string_get	100
nx_snmp_object_string_set	101
nx_snmp_object_timetics_get	102
nx_snmp_object_timetics_set	103

Chapter 1

Introduction to NetX Duo SNMP

The Simple Network Management Protocol (SNMP) is a protocol designed for managing devices on the internet. SNMP is a protocol that utilizes the connectionless User Datagram Protocol (UDP) services to perform its management function. The NetX Duo SNMP implementation is that of an SNMP Agent. An agent is responsible for responding to SNMP Manager's commands and sending event driven traps.

NetX Duo SNMP supports both IPv4 and IPv6 communication with SNMP Managers. NetX SNMP applications should compile and run in NetX Duo SNMP. However, the developer is encouraged to port existing SNMP applications to using the equivalent "duo" services. For example, when sending SNMP trap messages, the following 'duo' services should replace their NetX equivalent:

```
nxd_snmp_object_trap_send  
nxd_snmp_object_trapv2_send  
nxd_snmp_object_trapv3_send
```

For more details, see **Description of SNMP Agent Services** elsewhere in this User Guide for more details.

NetX Duo SNMP Agent Requirements

The NetX Duo SNMP package requires that an IP instance has already been created. In addition, UDP must be enabled on that same IP instance.

The NetX Duo SNMP Agent has several additional requirements. First, it requires access to port 161 for handling all SNMP manager requests. It also requires access to port 162 for sending trap messages to the Manager.

To use NetX Duo SNMP Agent with over IPv6 and to obtain IPv6 objects, IPv6 must be enabled in NetX Duo. See the **NetX Duo User Guide** for details on enabling the IP instance for IPv6 services.


NetX Duo SNMP Constraints

The NetX Duo SNMP protocol implements SNMP Version 1, 2, and 3. The SNMPv3 implementation supports MD5 and SHA authentication, and DES encryption. This version of the NetX Duo SNMP Agent has the following constraints:

1. One SNMP Agent per NetX IP Instance
2. No support for RMON
3. SNMP v3 Inform messages are not supported
4. OPAQUE and NSAP data types are not supported
5. IPv6 addresses are defined as octet strings, and format checking is left to the application.

SNMP Object Names

The SNMP protocol is designed to manage devices on the internet. To accomplish this, each SNMP managed device has a set of objects that are defined by the Structure of Management Information (SMI) as defined by RFC 1155. The structure is a hierarchical tree type of structure that looks like the following:

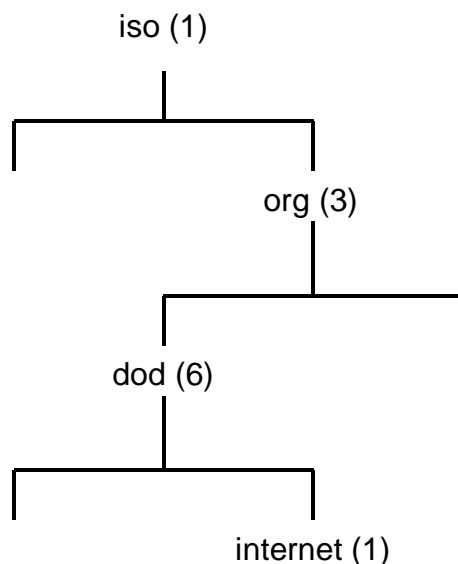

Each node in the tree is an object. The “dod” object in the tree is identified by the notation 1.3.6, while the “internet” object in the tree is identified by the notation 1.3.6.1. All SNMP object names begin with the notation 1.3.6.

An SNMP Manager uses this object notation to specify what object in the device it wishes to get or set. The NetX Duo SNMP Agent interprets such manager requests and provides mechanisms for the application to perform the requested operation.

SNMP Manager Requests

The SNMP has a simple mechanism for managing devices. There is a set of standard SNMP commands that are issued by the SNMP Manager to the SNMP device on port 161. The following shows some of the basic SNMP Manager commands:

SNMP Command	Meaning
GET	<i>Get the specified object</i>
GETNEXT	<i>Get the next logical object after the specified object ID</i>

To include proprietary variables in the trap message, the `trap_type` input argument is set to `NX_SNMP_TRAP_CUSTOM` and the trap list input argument contains the proprietary data. Note that the trap message will contain as the system up time (1.3.6.1.6.3.1.1.4.1.0). An example is shown below for SNMPv2:

```
NX_SNMP_TRAP_OBJECT trap_list[3];
NX_SNMP_OBJECT_DATA trap_data0;

/* Load the data into the OBJECT. */
nx_snmp_object_id_get((void*)"1.3.6.1.4.1.7428.1.3.2.0", &trap_data0);

/* Update the Trap Object with the object and OID. */
trap_list[0].nx_snmp_object_string_ptr = (UCHAR *)"1.3.6.1.6.3.1.1.4.0";
trap_list[0].nx_snmp_object_data = &trap_data0;

/* Null terminate the trap list. */
trap_list[1].nx_snmp_object_string_ptr = NX_NULL;

status = nx_snmp_agent_trapv2_send(&my_agent, MIB_IP_ADDRESS,
                                   (UCHAR *)"trapduo",
                                   NX_SNMP_TRAP_CUSTOM,
                                   tx_time_get(), trap_list);
```

NetX Duo SNMP Authentication and Encryption

There are two flavors of authentication, namely *basic* and *digest*. Basic authentication is equivalent to a simple plain text *username* authentication found in many protocols. In SNMP basic authentication, the user simply verifies that the supplied username is valid for performing SNMP operations. Basic authentication is the only option for SNMP versions 1 and 2.

The main disadvantage of basic authentication is the username is transmitted in plain text. The SNMPv3 digest authentication addresses this problem by never transmitting the username in plain text. Instead, an algorithm is used to derive a 96-bit 'digest' from the username, context engine, and other information. The NetX Duo SNMP Agent supports both MD5 and SHA digest algorithms.

To enable authentication, the SNMP Agent must set its Context Engine ID using the `nx_snmp_agent_context_engine_set` service. The Context Engine ID is used in the creation of the authentication key.

Encryption of SNMPv3 data is available using the DES algorithm. Encryption requires that authentication be enabled (one cannot encrypt data without setting the authentication parameters).

To create authentication and privacy keys, the following API are used:

```
UINT _nx_snmp_agent_md5_key_create(NX_SNMP_AGENT *agent_ptr,
```

```

                                UCHAR *password, NX_SNMP_SECURITY_KEY
                                *destination_key)

UINT  _nx_snmp_agent_sha_key_create(NX_SNMP_AGENT *agent_ptr,
                                UCHAR *password, NX_SNMP_SECURITY_KEY
                                *destination_key)

```

Next, the SNMP agent must be configured to use these keys. To register a key with the SNMP agent, the following API are used:

```

UINT  _nx_snmp_agent_authenticate_key_use(NX_SNMP_AGENT *agent_ptr,
                                NX_SNMP_SECURITY_KEY *key)

UINT  _nx_snmp_agent_privacy_key_use(NX_SNMP_AGENT *agent_ptr,
                                NX_SNMP_SECURITY_KEY *key)

```

Separate keys can be created for trap messages. To apply keys for trap messages the following API are available:

```

UINT  _nx_snmp_agent_auth_trap_key_use(NX_SNMP_AGENT *agent_ptr,
                                NX_SNMP_SECURITY_KEY *key)

UINT  _nx_snmp_agent_priv_trap_key_use(NX_SNMP_AGENT *agent_ptr,
                                NX_SNMP_SECURITY_KEY *key)

```

To disable authentication or encryption for response messages and sending traps, use these services with the key pointer input set to NULL.

NetX Duo SNMP Community Strings

The NetX Duo SNMP Agent supports both public and private community strings. The public string is set with the ***`nx_snmp_agent_public_string_set`*** service. The NetX Duo SNMP Agent private string is set using the ***`nx_snmp_agent_private_string_set`*** service.

NetX Duo SNMP Username Callback

The NetX Duo SNMP Agent package allows the application to specify (via the ***`nx_snmp_agent_create`*** call) a username callback routine that is called at the beginning of handling each SNMP Client request.

The callback routine provides the NetX Duo SNMP Agent with the username. If the supplied username is valid or if no username check is necessary for the responding to the request, the username callback should return the value of **`NX_SUCCESS`**. Otherwise, the routine should return **`NX_SNMP_ERROR`** to indicate the specified username is invalid.

The format of the application username callback routine is defined below:

```
UINT nx_snmp_agent_username_process(NX_SNMP_AGENT *agent_ptr,
                                   UCHAR *username);
```

The input parameters are defined as follows:

Parameter	Meaning
<i>agent_ptr</i>	Pointer to calling SNMP agent
<i>username</i>	Destination for the pointer to the required username

For SNMPv1 and SNMPv2/v2C sessions, the application will want to examine the community string on an incoming SNMP request to determine if the SNMP request has a valid community string. There are several services for the SNMP application to do this.

The SNMP application can inquire if the current SNMP Manager request is a GET (e.g. GET, GETNEXT, or GETBULK) or SET type of request using this service:

```
UINT nx_snmp_agent_request_get_type_test(NX_SNMP_AGENT *agent_ptr,
                                         UINT *is_get_type);
```

If the request is a GET type, the application will want to compare the input community string to the SNMP Agent's public string:

```
UINT nx_snmp_agent_public_string_test(NX_SNMP_AGENT *agent_ptr,
                                       UCHAR *username,
                                       UINT *is_public)
```

Similarly if the request is a SET type, the application will want to compare the input community string to the SNMP Agent's private string:

```
UINT nx_snmp_agent_private_string_test(NX_SNMP_AGENT *agent_ptr,
                                       UCHAR *username,
                                       UINT *is_private)
```

The *is_public* and *is_private* return values indicate respectively if the input community string is a valid public or private community string.

The return value of the username callback routine indicates if the username is valid. The value **NX_SUCCESS** is returned if the username is valid, or **NX_SNMP_ERROR** if the username is invalid.

NetX Duo SNMP Agent GET Callback

The application must set a callback routine for handling GET object requests from the SNMP Manager. The callback retrieves the value of the object specified in the request.

The application GET request callback routine is defined below:

```
UINT nx_snmp_agent_get_process(NX_SNMP_AGENT *agent_ptr,
                              UCHAR *object_requested,
                              NX_SNMP_OBJECT_DATA *object_data);
```

The input parameters are defined as follows:

Parameter	Meaning
<i>agent_ptr</i>	Pointer to calling SNMP agent.
<i>object_requested</i>	ASCII string representing the object ID the GET operation is for.
<i>object_data</i>	Data structure to hold the value retrieved by the callback. This can be set with a series of NetX Duo SNMP API's described below.

Note that for octet strings, the object must be assigned the length so that the internal function knows how long the length is since the callback itself does not have a length argument:

```
object_data -> nx_snmp_object_octet_string_size = mib2_mib[i].length;
```

Since the type of data is not known to the GET callback, there is no need to check the data type. Length will not have any effect on numeric types or strings which are null delimited.

Then call the internal function:

```
status = mib2_mib[i].object_get_callback)
        (mib2_mib[i].object_value_ptr, object_data);
```

If the callback function cannot find the requested object, the **NX_SNMP_ERROR_NOSUCHNAME** error code should be returned. If any other error is detected, the **NX_SNMP_ERROR** should be returned.

NetX Duo SNMP Agent GETNEXT Callback

The application must also set the callback routine for handling GETNEXT object requests from the SNMP Manager. The GETNEXT callback retrieves the value of the next object specified by the request.

The application GETNEXT request callback routine is defined below:

```
UINT nx_snmp_agent_getnext_process(NX_SNMP_AGENT *agent_ptr,
                                   UCHAR *object_requested,
                                   NX_SNMP_OBJECT_DATA *object_data);
```

The input parameters are defined as follows:

Parameter	Meaning
<i>agent_ptr</i>	Pointer to calling SNMP agent.
<i>object_requested</i>	ASCII string representing the object ID the GETNEXT operation is for.
<i>object_data</i>	Data structure to hold the value retrieved by the callback. This can be set with a series of NetX Duo SNMP API's described below.

Same as is true for GET callbacks, objects with octet string data must be assigned the length so that the internal function knows how long the length is since the callback itself does not have a length argument:

```
object_data -> nx_snmp_object_octet_string_size = mib2_mib[i].length;
```

Since the type of data is not known to the GET callback, there is no need to check the data type. Length will not have any effect on numeric types or strings which are null delimited.

Then call the internal function:

```
status = mib2_mib[i].object_get_callback(
    (mib2_mib[i].object_value_ptr, object_data);
```

If the callback function cannot find the requested object, the **NX_SNMP_ERROR_NOSUCHNAME** error code should be returned. If any other error is detected, the **NX_SNMP_ERROR** should be returned.

NetX Duo SNMP Agent SET Callback

The application should set the callback routine for handling SET object requests from the SNMP Manager. The SET callback sets the value of the object specified by the request.

The application SET request callback routine is defined below:

```
UINT nx_snmp_agent_set_process(NX_SNMP_AGENT *agent_ptr,
                               UCHAR *object_requested,
                               NX_SNMP_OBJECT_DATA *object_data);
```

The input parameters are defined as follows:

Parameter	Meaning
<i>agent_ptr</i>	Pointer to calling SNMP agent.
<i>object_requested</i>	ASCII string representing the object ID the SET operation is for.
<i>object_data</i>	Data structure that contains the new value for the specified object. The actual operation can be done using the NetX Duo SNMP API's described below.

Note that for octet strings, the SET callback should update the MIB table with the length of the data since the SNMP Agent has parsed the data and knows the type and length:

```
if (object_data -> nx_snmp_object_data_type ==
    NX_SNMP_ANSI_OCTET_STRING)
{
    mib2_mib[i].length =
        object_data -> nx_snmp_object_octet_string_size;
}

object_data -> nx_snmp_object_octet_string_size =
    mib2_mib[i].length;
```

If the callback function cannot find the requested object, the **NX_SNMP_ERROR_NOSUCHNAME** error code should be returned.

If the NetX Duo SNMP host has created private community strings, and the SNMP sender of the SET request does not have the matching private string, it may return an **NX_SNMP_ERROR_NOACCESS** error. If any other error is detected, the **NX_SNMP_ERROR** should be returned.

Note that although NetX Duo SNMP Agent supplies an SNMP MIB database with the distribution, it is primarily for testing and development purposes. The developer will likely require a proprietary MIB database for a professional SNMP application.

Changing SNMP Version at Run Time

The SNMP Agent host can change SNMP version for each of the three versions at run time using the `nx_snmp_agent_set_version` service. The SNMP Agent is by default enabled for all three versions when the SNMP Agent is created in `nx_snmp_agent_create`. However, the application can limit that to a subset of all versions.

Note: if the configuration options `NX_SNMP_DISABLE_V1`, `NX_SNMP_DISABLE_V2` and/or `NX_SNMP_DISABLE_V3` are defined, this function will have no effect enabling the effected versions.

The SNMP Agent can retrieve the SNMP version of the latest SNMP packet received using the `nx_snmp_agent_get_current_version` service.

SNMPv3 Discovery

The SNMP Agent, if enabled for SNMPv3, will respond to discovery requests from the SNMP Manager. Such a request contains security parameter data with null values for Authoritative Engine ID, user name, boot count and boot time. Authentication parameters are not applied to the DISCOVERY message. The variable binding list in the request is empty (contains zero items). The SNMP agent responds with a zero boot time and count, and the variable binding list containing 1 item, `usmStatsUnknownEngineIDs`, which is the count of requests received with an unknown (null) engine ID. On the subsequent GETNEXT request from the Browser/Manager, the boot data and security parameters are filled in only if security is enabled. If so it will also send a `NotInTime` data update in the PDU. The security parameters, e.g. authentication prove the identity of the Agent to the Manager.

More detailed information on SNMPv3 authentication is available in RFC 3414 "User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)".

NetX Duo SNMP RFCs

NetX Duo SNMP is compliant with RFC1155, RFC1157, RFC1215, RFC1901, RFC1905, RFC1906, RFC1907, RFC1908, RFC2571, RFC2572, RFC2574, RFC2575, RFC 3414 and related RFCs.

.

Chapter 2

Installation and Use of the NetX Duo SNMP Agent

This chapter contains a description of various issues related to installation, setup, and usage of the NetX Duo SNMP Agent component.

Product Distribution

SNMP Agent for NetX Duo is shipped on a single CD-ROM compatible disk. The package includes four source files, one include file, and a PDF file that contains this document, as follows:

nxd_snmp.h	Header file for SNMP for NetX Duo
demo_snmp_helper.h	Header file for SNMP MIB data
nxd_snmp.c	C Source file for SNMP Agent for NetX Duo
nx_md5.c	MD5 digest algorithms
nx_sha.c	SHA digest algorithms
nx_des.c	DES encryption algorithms
nxd_snmp.pdf	User Guide for SNMP Agent for NetX Duo
demo_netxduo_snmp.c	Simple SNMP demonstration
demo_netxduo_mib2.c	Simple MIB2 demonstration (MIB has IPv6 address elements)
demo_snmp_helper.h	Header file defining MIB elements

NetX Duo SNMP Agent Installation

In order to use NetX Duo SNMP, the entire distribution mentioned previously should be copied to the same directory where NetX Duo is installed. For example, if NetX Duo is installed in the directory “\threadx\arm7\green” then the *nxd_snmp.h*, *nxd_snmp.c*, *nx_md5.c*, *nx_sha.c* and *nx_des.c* files should be copied into this directory.

Using the NetX Duo SNMP Agent

The application must have *nxd_snmp.c*, *nx_md5.c*, *nx_sha.c*, and *nx_des.c* in the build project. The application code must also include *nxd_snmp.h* after it includes *nx_api.h* to be able to invoke SNMP services.

These files must be compiled in the same manner as other application files and its object form must be linked to the NetX Duo library. This is all that is required to use NetX Duo SNMP.

Note that if **NX_SNMP_NO_SECURITY** is specified in the build process, the *nx_md5.c*, *nx_sha.c*, and *nx_des.c* files are not needed.

Note also that since NetX Duo SNMP utilizes UDP services, UDP must be enabled with the *nx_udp_enable* call prior to using SNMP.

Small Example System

An example of how to use NetX Duo SNMP Agent is described in Figure 1.0 that appears below. In this example, the SNMP include file *nxd_snmp.h* is brought in at line 6. The header file that defines the MIB database elements, *demo_snmp_helper.h*, is brought in at line 8. The MIB is defined starting on line 32. Next, the SNMP Agent is created in “*tx_application_define*” at line 129. Note that the SNMP Agent control block “*my_agent*” was defined as a global variable at line 18 previously. If IPv6 is enabled, the IPv6 addresses are registered with the IP instance in lines 166-223. SNMP Agent is started at line 229. SNMP object callback definitions for SNMP manager GET, GETNEXT and SET requests, as well as username and MIB update requests, are processed starting at line 250. For this example, no authenticate is performed.

Note that the MIB2 table shown below is simply an example. The application may use a different MIB and include it in separate files, as well as define GET, GETNEXT, or SET processing as per their application requirements.

```

1  /* This is a small demo of the NetX SNMP Agent on the high-performance NetX TCP/IP
2     stack. This demo relies on ThreadX and NetX to show simple SNMP the SNMP
3     GET/GETNEXT/SET requests on MIB-2 objects. */
4
5  #include "tx_api.h"
6  #include "nx_api.h"
7  #include "nxd_snmp.h"
8  #include "demo_snmp_helper.h"
9
10 #define DEMO_STACK_SIZE 4096
11 #define AGENT_PRIMARY_ADDRESS IP_ADDRESS(192, 2, 2, 66)
12
13 /* Define the ThreadX and NetX object control blocks... */
14
15 TX_THREAD thread_0;
16 NX_PACKET_POOL pool_0;
17 NX_IP ip_0;
18 NX_SNMP_AGENT my_agent;
19
20
21 /* Indicate if using IPv6 to communicate with SNMP servers. Note that
22    IPv6 must be enabled in the NetX Duo library first. Further, IPv6
23    and ICMPV6 services are enabled before starting the SNMP agent. */
24 #define USE_IPV6

```

```

25
26
27 /* Define authentication and privacy keys. */
28
29 #ifdef AUTHENTICATION_REQUIRED
30 NX_SNMP_SECURITY_KEY    my_authentication_key;
31 #endif
32
33 #ifdef PRIVACY_REQUIRED
34 NX_SNMP_SECURITY_KEY    my_privacy_key;
35 #endif
36
37 /* Define an error counter variable. */
38 UINT error_counter = 0;
39
40 /* This binds a secondary interfaces to the primary IP network interface
41    if SNMP is required for that interface. */
42 /* #define MULTI_HOMED_DEVICE */
43
44 /* Define function prototypes. A generic ram driver is used in this demo. However
45    to properly run an SNMP agent demo, a real driver should be substituted. */
46
47 VOID    thread_agent_entry(ULONG thread_input);
48 VOID    _nx_ram_network_driver(NX_IP_DRIVER *driver_req_ptr);
49 UINT    mib2_get_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *object_requested,
50                             NX_SNMP_OBJECT_DATA *object_data);
51
52 UINT    mib2_getnext_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *object_requested,
53                                 NX_SNMP_OBJECT_DATA *object_data);
54
55 UINT    mib2_set_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *object_requested,
56                             NX_SNMP_OBJECT_DATA *object_data);
57
58 UINT    mib2_username_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *username);
59 VOID    mib2_variable_update(NX_IP *ip_ptr, NX_SNMP_AGENT *agent_ptr);
60
61
62 UCHAR context_engine_id[] = {0x80, 0x00, 0x0d, 0xfe, 0x03, 0x00, 0x11, 0x23, 0x23,
63                               0x44, 0x55};
64
65 UINT    context_engine_size = 11;
66 UCHAR context_name[] = {0x69, 0x6e, 0x69, 0x74, 0x69, 0x61, 0x6c};
67
68 UINT    context_name_size = 7;
69
70 /* Define main entry point. */
71
72 int main()
73 {
74     /* Enter the ThreadX kernel. */
75     tx_kernel_enter();
76 }
77
78
79 /* Define what the initial system looks like. */
80 void    tx_application_define(void *first_unused_memory)
81 {
82     UCHAR *pointer;
83     UINT    status;
84
85     /* Setup the working pointer. */
86     pointer = (UCHAR *) first_unused_memory;
87
88     status = tx_thread_create(&thread_0, "agent thread", thread_agent_entry, 0,
89                             pointer, DEMO_STACK_SIZE,
90                             4, 4, TX_NO_TIME_SLICE, TX_AUTO_START);
91
92     if (status != NX_SUCCESS)
93     {
94         return;
95     }
96
97     pointer = pointer + DEMO_STACK_SIZE;
98
99     /* Initialize the NetX system. */
100    nx_system_initialize();
101
102    /* Create packet pool. */
103    status = nx_packet_pool_create(&pool_0, "NetX Packet Pool 0", 2048,
104                                  pointer, 20000);
105
106    if (status != NX_SUCCESS)
107    {

```

```

101         return;
102     }
103
104     pointer = pointer + 20000;
105
106     /* Create an IP instance. */
107     status = nx_ip_create(&ip_0, "SNMP Agent IP Instance", AGENT_PRIMARY_ADDRESS,
108                          0xFFFFFFFFUL, &pool_0, _nx_ram_network_driver,
109                          pointer, 4096, 1);
110
111     if (status != NX_SUCCESS)
112     {
113         return;
114     }
115
116     pointer = pointer + 4096;
117
118     /* Enable ARP and supply ARP cache memory for IP Instance 0. */
119     nx_arp_enable(&ip_0, (void *) pointer, 1024);
120     pointer = pointer + 1024;
121
122     /* Enable UDP processing for IP instance. */
123     nx_udp_enable(&ip_0);
124
125     /* Enable ICMP for ping. */
126     nx_icmp_enable(&ip_0);
127
128     /* Create an SNMP agent instance. */
129     status = nx_snmp_agent_create(&my_agent, "SNMP Agent", &ip_0, pointer, 4096,
                                   &pool_0,
                                   mib2_username_processing, mib2_get_processing,
                                   mib2_getnext_processing,
                                   mib2_set_processing);
130
131
132
133     if (status != NX_SUCCESS)
134     {
135         return;
136     }
137
138     pointer = pointer + 4096;
139
140     status = nx_snmp_agent_context_engine_set(&my_agent, context_engine_id,
                                                context_engine_size);
141
142     if (status != NX_SUCCESS)
143     {
144         error_counter++;
145     }
146
147     return;
148 }
149
150 VOID thread_agent_entry(ULONG thread_input)
151 {
152
153     #ifdef USE_IPV6
154     UINT      iface_index, address_index;
155     UINT      status;
156     NXD_ADDRESS agent_ipv6_address;
157     #endif
158
159
160     /* Allow NetX time to get initialized. */
161     tx_thread_sleep(100);
162
163     /* If using IPv6, enable IPv6 and ICMPv6 services and get IPv6 addresses
164        registered with NetX Dou. */
165
166     #ifdef USE_IPV6
167
168     /* Enable IPv6 on the IP instance. */
169     status = nxd_ipv6_enable(&ip_0);
170
171     /* Check for enable errors. */
172     if (status)
173     {
174
175         error_counter++;
176         return;

```

```

177     }
178     /* Enable ICMPv6 on the IP instance. */
179     status = nxd_icmp_enable(&ip_0);
180
181     /* Check for enable errors. */
182     if (status)
183     {
184
185         error_counter++;
186         return;
187     }
188
189     agent_ipv6_address.nxd_ip_address.v6[3] = 0x101;
190     agent_ipv6_address.nxd_ip_address.v6[2] = 0x0;
191     agent_ipv6_address.nxd_ip_address.v6[1] = 0x0000f101;
192     agent_ipv6_address.nxd_ip_address.v6[0] = 0x20010db8;
193     agent_ipv6_address.nxd_ip_version = NX_IP_VERSION_V6;
194
195     /* Set the primary interface for our DNS IPv6 addresses. */
196     iface_index = 0;
197
198     /* This assumes we are using the primary network interface (index 0). */
199     status = nxd_ipv6_address_set(&ip_0, iface_index, NX_NULL, 10, &address_index);
200
201     /* Check for link local address set error. */
202     if (status)
203     {
204
205         error_counter++;
206         return;
207     }
208
209     /* Set the host global IP address. We are assuming a 64
210        bit prefix here but this can be any value (< 128). */
211     status = nxd_ipv6_address_set(&ip_0, iface_index, &agent_ipv6_address, 64,
                                   &address_index);
212
213     /* Check for global address set error. */
214     if (status)
215     {
216
217         error_counter++;
218         return;
219     }
220
221     /* Wait while NetX Duo validates the link local and global address. */
222     tx_thread_sleep(500);
223 #endif
224
225 #ifdef AUTHENTICATION_REQUIRED
226
227     /* Create an authentication key. */
228     nx_snmp_agent_md5_key_create(&my_agent, "authpassword", &my_authentication_key);
229
230     /* Use the authentication key. */
231     nx_snmp_agent_authenticate_key_use(&my_agent, &my_authentication_key);
232 #endif
233
234 #ifdef PRIVACY_REQUIRED
235
236     /* Create a privacy key. */
237     nx_snmp_agent_md5_key_create(&my_agent, "privpassword", &my_privacy_key);
238
239     /* Use the privacy key. */
240     nx_snmp_agent_privacy_key_use(&my_agent, &my_privacy_key);
241 #endif
242
243     /* Start the SNMP instance. */
244     nx_snmp_agent_start(&my_agent);
245 }
246
247 /* Define the application's GET processing routine. */
248
249
250 UINT    mib2_get_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *object_requested,
251                             NX_SNMP_OBJECT_DATA *object_data)
252 {
253     UINT    i;
254     UINT    status;
255

```



```

256
257     printf("SNMP Manager GET Request For: %s", object_requested);
258
259     /* Loop through the sample MIB to see if we have information for the supplied
260        variable. */
261     i = 0;
262     status = NX_SNMP_ERROR;
263     while (mib2_mib[i].object_name)
264     {
265         /* See if we have found the matching entry. */
266         status = nx_snmp_object_compare(object_requested, mib2_mib[i].object_name);
267
268         /* Was it found? */
269         if (status == NX_SUCCESS)
270         {
271             /* Yes it was found. */
272             break;
273         }
274
275         /* Move to the next index. */
276         i++;
277     }
278
279     /* Determine if a not found condition is present. */
280     if (status != NX_SUCCESS)
281     {
282         printf(" NO SUCH NAME!\n");
283
284         /* The object was not found - return an error. */
285         return(NX_SNMP_ERROR_NOSUCHNAME);
286     }
287
288     /* Determine if the entry has a get function. */
289     if (mib2_mib[i].object_get_callback)
290     {
291         /* Yes, call the get function. */
292         status = (mib2_mib[i].object_get_callback)(mib2_mib[i].object_value_ptr,
293                                                    object_data);
294     }
295     else
296     {
297         printf(" NO GET FUNCTION!");
298
299         /* No get function, return no access. */
300         status = NX_SNMP_ERROR_NOACCESS;
301     }
302
303     printf("\n");
304
305     /* Return the status. */
306     return(status);
307 }
308
309
310
311
312 /* Define the application's GETNEXT processing routine. */
313
314
315 UINT    mib2_getnext_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *object_requested,
316                                NX_SNMP_OBJECT_DATA *object_data)
317 {
318     UINT    i;
319     UINT    status;
320
321     printf("SNMP Manager GETNEXT Request For: %s", object_requested);
322
323     /* Loop through the sample MIB to see if we have information for the supplied
324        variable. */
325     i = 0;
326     status = NX_SNMP_ERROR;
327     while (mib2_mib[i].object_name)
328     {
329         /* See if we have found the next entry. */
330         status = nx_snmp_object_compare(object_requested, mib2_mib[i].object_name);
331     }
332

```

```

333     /* Is the next entry the mib greater? */
334     if (status == NX_SNMP_NEXT_ENTRY)
335     {
336
337         /* Yes it was found. */
338         break;
339     }
340
341     /* Move to the next index. */
342     i++;
343 }
344
345 /* Determine if a not found condition is present. */
346 if (status != NX_SNMP_NEXT_ENTRY)
347 {
348
349     printf(" NO SUCH NAME!\n");
350
351     /* The object was not found - return an error. */
352     return(NX_SNMP_ERROR_NOSUCHNAME);
353 }
354
355
356 /* Copy the new name into the object. */
357 nx_snmp_object_copy(mib2_mib[i].object_name, object_requested);
358
359 printf(" Next Name is: %s", object_requested);
360
361 /* Determine if the entry has a get function. */
362 if (mib2_mib[i].object_get_callback)
363 {
364
365     /* Yes, call the get function. */
366     status = (mib2_mib[i].object_get_callback)(mib2_mib[i].object_value_ptr,
                                                object_data);
367
368     /* Determine if the object data indicates an end-of-mib condition. */
369     if (object_data -> nx_snmp_object_data_type == NX_SNMP_END_OF_MIB_VIEW)
370     {
371
372         /* Copy the name supplied in the mib table. */
373         nx_snmp_object_copy(mib2_mib[i].object_value_ptr, object_requested);
374     }
375 }
376 else
377 {
378
379     printf(" NO GET FUNCTION!");
380
381     /* No get function, return no access. */
382     status = NX_SNMP_ERROR_NOACCESS;
383 }
384
385 printf("\n");
386
387 /* Return the status. */
388 return(status);
389 }
390
391
392 /* Define the application's SET processing routine. */
393
394 UINT mib2_set_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *object_requested,
                          NX_SNMP_OBJECT_DATA *object_data)
395 {
396
397     UINT i;
398     UINT status;
399
400
401     printf("SNMP Manager SET Request For: %s", object_requested);
402
403     /* Loop through the sample MIB to see if we have information for the supplied
variable. */
404     i = 0;
405     status = NX_SNMP_ERROR;
406     while (mib2_mib[i].object_name)
407     {
408
409         /* See if we have found the matching entry. */
410         status = nx_snmp_object_compare(object_requested, mib2_mib[i].object_name);

```

```

411
412     /* Was it found? */
413     if (status == NX_SUCCESS)
414     {
415
416         /* Yes it was found. */
417         break;
418     }
419
420     /* Move to the next index. */
421     i++;
422 }
423
424 /* Determine if a not found condition is present. */
425 if (status != NX_SUCCESS)
426 {
427
428     printf(" NO SUCH NAME!\n");
429
430     /* The object was not found - return an error. */
431     return(NX_SNMP_ERROR_NOSUCHNAME);
432 }
433
434
435 /* Determine if the entry has a set function. */
436 if (mib2_mib[i].object_set_callback)
437 {
438
439     /* Yes, call the set function. */
440     status = (mib2_mib[i].object_set_callback)(mib2_mib[i].object_value_ptr,
                                                object_data);
441 }
442 else
443 {
444
445     printf(" NO SET FUNCTION!");
446
447     /* No get function, return no access. */
448     status = NX_SNMP_ERROR_NOACCESS;
449 }
450
451 printf("\n");
452
453 /* Return the status. */
454 return(status);
455 }
456
457
458 /* Define the application's authentication routine. */
459
460 UINT mib2_username_processing(NX_SNMP_AGENT *agent_ptr, UCHAR *username)
461 {
462
463     printf("Username is: %s\n", username);
464
465     /* Update MIB-2 objects. In this example, it is only the SNMP objects. */
466     mib2_variable_update(&ip_0, &my_agent);
467
468     /* No authentication is done, just return success! */
469     return(NX_SUCCESS);
470 }
471
472
473 /* Define the application's update routine. */
474
475 VOID mib2_variable_update(NX_IP *ip_ptr, NX_SNMP_AGENT *agent_ptr)
476 {
477
478     /* Update the snmp parameters. */
479     snmpInPkts = agent_ptr -> nx_snmp_agent_packets_received;
480     snmpOutPkts = agent_ptr -> nx_snmp_agent_packets_sent;
481     snmpInBadVersions = agent_ptr -> nx_snmp_agent_invalid_version;
482     snmpInBadCommunityNames = agent_ptr -> nx_snmp_agent_authentication_errors;
483     snmpInBadCommunityUsers = agent_ptr -> nx_snmp_agent_username_errors;
484     snmpInASNParseErrs = agent_ptr -> nx_snmp_agent_internal_errors;
485     snmpInTotalReqVars = agent_ptr -> nx_snmp_agent_total_get_variables;
486     snmpInTotalSetVars = agent_ptr -> nx_snmp_agent_total_set_variables;
487     snmpInGetRequests = agent_ptr -> nx_snmp_agent_get_requests;
488     snmpInGetNexts = agent_ptr -> nx_snmp_agent_getnext_requests;
489     snmpInSetRequests = agent_ptr -> nx_snmp_agent_set_requests;
490     snmpOutTooBig = agent_ptr -> nx_snmp_agent_too_big_errors;

```

```
491     snmpOutNoSuchNames =      agent_ptr -> nx_snmp_agent_no_such_name_errors;  
492     snmpOutBadValues =      agent_ptr -> nx_snmp_agent_bad_value_errors;  
493     snmpOutGenErrs =      agent_ptr -> nx_snmp_agent_general_errors;  
494     snmpOutTraps =      agent_ptr -> nx_snmp_agent_traps_sent;  
495 }  
496
```

Figure 1.0 Example of SNMP Agent use with NetX Duo

Configuration Options

There are several configuration options for building SNMP for NetX Duo. Following is a list of all options, where each is described in detail:

Define	Meaning
NX_SNMP_AGENT_PRIORITY	The priority of the SNMP AGENT thread. By default, this value is defined as 16 to specify priority 16.
NX_SNMP_TYPE_OF_SERVICE	Type of service required for the SNMP UDP responses. By default, this value is defined as NX_IP_NORMAL to indicate normal IP packet service. This define can be set by the application prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_FRAGMENT_OPTION	Fragment enable for SNMP UDP requests. By default, this value is NX_DONT_FRAGMENT to disable SNMP UDP fragmenting. This define can be set by the application prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_TIME_TO_LIVE	Specifies the time to live before it expires. The default value is set to 0x80, but can be redefined prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_AGENT_TIMEOUT	Specifies the number of ThreadX ticks that internal services will suspend for. The default value is set to 100, but can be redefined prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_MAX_OCTET_STRING	Specifies the maximum number of bytes allowed in an octet string in the SNMP Agent.

The default value is set to 255, but can be redefined prior to inclusion of *nxd_snmp.h*.

NX_SNMP_MAX_CONTEXT_STRING	Specifies the maximum number of bytes for a context engine string in the SNMP Agent. The default value is set to 32, but can be redefined prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_MAX_USER_NAME	Specifies the maximum number of bytes in a username (including community strings). The default value is set to 64, but can be redefined prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_MAX_SECURITY_KEY	Specifies the number of bytes allowed in a security key string. The default value is set to 64, but can be redefined prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_PACKET_SIZE	Specifies the minimum size of the packets in the pool specified at SNMP Agent creation. The minimum size is needed to ensure the complete SNMP payload can be contained in one packet. The default value is set to 560, but can be redefined prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_AGENT_PORT	Specifies the UDP port to field SNMP Manager requests on. The default port is UDP port 161, but can be redefined prior to inclusion of <i>nxd_snmp.h</i> .
NX_SNMP_MANAGER_TRAP_PORT	Specifies the UDP port to send SNMP Agent trap requests to. The default port is UDP port 162, but can be redefined prior to

inclusion of *nxd_snmp.h*.

NX_SNMP_MAX_TRAP_NAME

Specifies the size of the array to hold the username sent with trap messages. The default value is 64.

NX_SNMP_MAX_TRAP_KEY

Specifies the size of the authentication and privacy keys for trap messages. The default value is 64.

NX_SNMP_TIME_INTERVAL

This determines the sleep interval in timer ticks taken by the SNMP thread task between processing received SNMP packets. The default value is 100. During this sleep interval the host application has access to SNMP API services.

NX_SNMP_DISABLE_V1

Defined, this removes all the SNMP Version 1 processing in *nxd_snmp.c*. By default this is not defined.

NX_SNMP_DISABLE_V2

Defined, this removes all the SNMP Version 2 processing in *nxd_snmp.c*. By default this is not defined.

NX_SNMP_DISABLE_V3

Defined, this removes all the SNMPv3 processing in *nxd_snmp.c*. By default this is not defined.

Chapter 3

Description of SNMP Agent Services

This chapter contains a description of all NetX Duo SNMP Agent services (listed below) in alphabetic order.

In the “Return Values” section in the following API descriptions, values in **BOLD** are not affected by the **NX_DISABLE_ERROR_CHECKING** define that is used to disable API error checking, while non-bold values are completely disabled.

`nx_snmp_agent_auth_trap_key_use`
Specify authentication key (SNMP v3 only) for trap messages

`nx_snmp_agent_authenticate_key_use`
Specify authentication key (SNMP v3 only) for response messages

`nx_snmp_agent_community_get`
Retrieve community name

`nx_snmp_agent_context_engine_set`
Set context engine (SNMP v3 only)

`nx_snmp_agent_context_name_set`
Set context name (SNMP v3 only)

`nx_snmp_agent_create`
Create SNMP agent

`nx_snmp_agent_current_version_set`
Get the SNMP version of received packet

`nx_snmp_agent_request_get_type_test`
Indicate if last SNMP request is GET or SET type

`nx_snmp_agent_private_string_test`
Determine if string matches agent private string

`nx_snmp_agent_public_string_test`

Determine if string matches agent public string

`nx_snmp_agent_set_interface`

Set network interface for SNMP messaging

`nx_snmp_agent_private_string_set`

Set the SNMP agent private community string

`nx_snmp_agent_public_string_set`

Set the SNMP agent public community string

`nx_snmp_agent_version_set`

Set the SNMP agent status for all SNMP versions

`nx_snmp_agent_delete`

Delete SNMP agent

`nx_snmp_agent_md5_key_create`

Create md5 key (SNMP v3 only)

`nx_snmp_agent_priv_trap_key_use`

Specify encryption key (SNMP v3 only) for trap messages

`nx_snmp_agent_privacy_key_use`

Specify encryption key (SNMP v3 only) for response messages

`nx_snmp_agent_sha_key_create`

Create sha key (SNMP v3 only)

`nx_snmp_agent_start`

Start SNMP agent

`nx_snmp_agent_stop`

Stop SNMP agent

`nx_snmp_agent_trap_send`

Send SNMP v1 trap (IPv4 only)

`nx_snmp_agent_trapv2_send`

Send SNMP v2 trap (IPv4 only)

`nx_snmp_agent_trapv2_send_oid`

Send SNMP v2 trap (IPv4 only) specifying the OID

`nx_snmp_agent_trapv3_send`
Send SNMP v3 trap (IPv4 only)

`nx_snmp_agent_trapv3_send_oid`
Send SNMP v2 trap (IPv4 only) specifying the OID

`nxd_snmp_agent_trap_send`
Send SNMP v1 trap (IPv4 and IPv6)

`nxd_snmp_agent_trapv2_send`
Send SNMP v2 trap (IPv4 and IPv6)

`nxd_snmp_agent_trapv2_send_oid`
Send SNMP v2 trap (IPv4/IPv6) specifying the OID

`nxd_snmp_agent_trapv3_send`
Send SNMP v3 trap (IPv4 and IPv6)

`nxd_snmp_agent_trapv3_send_oid`
Send SNMP v2 trap (IPv4/IPv6) specifying the OID

`nx_snmp_agent_v3_context_boots_set`
Set the number of reboots

`nx_snmp_object_compare`
Compare two objects

`nx_snmp_object_copy`
Copy an object

`nx_snmp_object_counter_get`
Get counter object

`nx_snmp_object_counter_set`
Set counter object

`nx_snmp_object_counter64_get`
Get 64-bit counter object

`nx_snmp_object_counter64_set`
Set 64-bit counter object

`nx_snmp_object_end_of_mib`
Set end-of-mib value

`nx_snmp_object_gauge_get`

Get gauge object

nx_snmp_object_gauge_set
Set gauge object

nx_snmp_object_id_get
Get object id

nx_snmp_object_id_set
Set object id

nx_snmp_object_integer_get
Get integer object

nx_snmp_object_integer_set
Set integer object

nx_snmp_object_ip_address_get
Get IP address object (IPv4 only)

nx_snmp_object_ip_address_set
Set IP address object (IPv4 only)

nx_snmp_object_ipv6_address_get
Get IP address object (IPv6 only)

nx_snmp_object_ipv6_address_set
Set IP address object (IPv6 only)

nx_snmp_object_no_instance
Set no-instance value

nx_snmp_object_not_found
Set not-found value

nx_snmp_object_octet_string_get
Get octet string object

nx_snmp_object_octet_string_set
Set octet string object

nx_snmp_object_string_get
Get ASCII string object

nx_snmp_object_string_set
Set ASCII string object

`nx_snmp_object_timetics_get`
Get timetics object

`nx_snmp_object_timetics_set`
Set timetics object

nx_snmp_agent_auth_trap_key_use

Specify authentication key for trap messages

Prototype

```
UINT nx_snmp_agent_auth_trap_key_use(NX_SNMP_AGENT *agent_ptr,
                                     NX_SNMP_SECURITY_KEY *key);
```

Description

This service specifies the key to be used for setting authentication parameters in the SNMPv3 security header in trap messages. Supplying a NX_NULL value for the key disables authentication.

Note: The key must be previously created. See `nx_snmp_agent_md5_key_create` or `nx_snmp_agent_sha_key_create`.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
key	Pointer to a previously created MD5 or SHA key.

Return Values

NX_SUCCESS	(0x00)	Successful authentication key set.
NX_NOT_ENABLED	(0x14)	SNMP Security disabled
NX_PTR_ERROR	(0x07)	Invalid SNMP Agent pointer.

Allowed From

Initialization, Threads

Example

```
/* Use previously created "my_key" for SNMPv3 trap message authentication. */
status = nx_snmp_agent_auth_trap_key_use(&my_agent, &my_key);

/* If status is NX_SUCCESS the SNMP Agent will use "my_key" for
   for authentication parameters in trap messages. */
```

nx_snmp_agent_authenticate_key_use

Specify authentication key for response messages

Prototype

```
UINT nx_snmp_agent_authenticate_key_use(NX_SNMP_AGENT *agent_ptr,
                                         NX_SNMP_SECURITY_KEY *key);
```

Description

This service specifies the key to be used for authentication parameters in the SNMPv3 security parameter for all requests made after it is set. Supplying a NX_NULL value for the key disables authentication.

Note: The key must be previously created. See `nx_snmp_agent_md5_key_create` or `nx_snmp_agent_sha_key_create`.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
key	Pointer to a previously created MD5 or SHA key.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP key set.
NX_NOT_ENABLED	(0x14)	SNMP Security disabled
NX_PTR_ERROR	(0x07)	Invalid SNMP Agent pointer.

Allowed From

Initialization, Threads

Example

```
/* Use previously created "my_key" for SNMPv3 authentication. */
status = nx_snmp_agent_authenticate_key_use(&my_agent, &my_key);

/* If status is NX_SUCCESS the SNMP Agent will use "my_key" for
   for setting the authentication parameters of SNMPv3 requests. */
```

nx_snmp_agent_community_get

Retrieve community name

Prototype

```
UINT nx_snmp_agent_community_get(NX_SNMP_AGENT *agent_ptr,
                                  UCHAR **community_string_ptr);
```

Description

This service retrieves the community name from the most recent SNMP request received by the SNMP Agent.

Input Parameters

agent_ptr Pointer to SNMP Agent control block.

community_string_ptr
 Pointer to a string pointer to return the
 SNMP Agent community string.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP community get.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
UCHAR *string_ptr;

/* Pickup the community string pointer for my_agent. */
status = nx_snmp_agent_community_get(&my_agent, &string_ptr);

/* If status is NX_SUCCESS the pointer "string_ptr" points to the
   last community name supplied to the SNMP agent. */
```

nx_snmp_agent_request_get_type_test

Indicate if last SNMP request is GET or SET type

Prototype

```
UINT nx_snmp_agent_request_get_type_test(NX_SNMP_AGENT *agent_ptr,
                                         UINT *is_get_type);
```

Description

This service indicates if the most recent request from the SNMP Manager is a GET (GET, GETNEXT, or GETBULK) or SET type. It is intended for use with the username callback where the SNMPv1 or SNMPv2 application will want to compare the received community string to the SNMP Agent public string if the request is a GET type, or to the SNMP Agent private string if the request is a SET type.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
is_get_type	Pointer to request type status: NX_TRUE if GET type NX_FALSE if SET type

Return Values

NX_SUCCESS	(0x00)	Successfully returned type
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
UINT is_get_type;

/* Determine if the current SNMP request is a GET or SET type. */
status = nx_snmp_agent_request_get_type_test(&my_agent, &is_get_type);

/* If status is NX_SUCCESS, is_get_type will indicate the request type. */
```


nx_snmp_agent_context_engine_set

Set context engine (SNMP v3 only)

Prototype

```
UINT nx_snmp_agent_context_engine_set(NX_SNMP_AGENT *agent_ptr,
                                       UCHAR *context_engine,
                                       UINT context_engine_size);
```

Description

This service sets the context engine of the SNMP Agent. It is only applicable for SNMPv3 processing. This should be called before creating security keys if the application is using authentication and encryption, since the context engine ID is used in the key creation process. If not, NetX Duo SNMP provides a default context engine id at the top of *nxd_snmp.c*:

```
UCHAR _nx_snmp_default_context_engine[NX_SNMP_MAX_CONTEXT_STRING] =
    {0x80, 0x00, 0x03, 0x10, 0x01, 0xc0, 0xa8, 0x64, 0xaf};
```

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
context_engine	Pointer to the context engine string.
context_engine_size	Size of context engine string. Note that the maximum number of bytes in a context engine is defined by NX_SNMP_MAX_CONTEXT_STRING.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP context engine set.
NX_NOT_ENABLED	(0x14)	SNMPv3 is not enabled
NX_SNMP_ERROR	(0x100)	Context engine size error.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
UCHAR my_engine[] = {0x80, 0x00, 0x01, 0x02, 0x03, 0x04, 0x05, 0x06, 0x07};  
/* Set the context engine for my_agent. */  
status = nx_snmp_agent_context_engine_set(&my_agent, my_engine, 9);  
  
/* If status is NX_SUCCESS the context engine has been set. */
```

nx_snmp_agent_context_name_set

Set context name (SNMP v3 only)

Prototype

```
UINT nx_snmp_agent_context_name_set(NX_SNMP_AGENT *agent_ptr,
                                     UCHAR *context_name,
                                     UINT context_name_size);
```

Description

This service sets the context name of the SNMP Agent. It is only applicable for SNMPv3 processing. If not called, NetX Duo SNMP Agent will leave the context name blank.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
context_name	Pointer to the context name string.
context_name_size	Size of context name string. Note that the maximum number of bytes in a context name is defined by NX_SNMP_MAX_CONTEXT_STRING.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP context name set.
NX_SNMP_ERROR	(0x100)	Context name size error.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Set the context name for my_agent. */
status = nx_snmp_agent_context_name_set(&my_agent, "my_context_name", 15);

/* If status is NX_SUCCESS the context name has been set. */
```

nx_snmp_agent_create

Create SNMP agent

Prototype

```
UINT nx_snmp_agent_create(NX_SNMP_AGENT *agent_ptr,
    CHAR *snmp_agent_name, NX_IP *ip_ptr, VOID *stack_ptr,
    ULONG stack_size, NX_PACKET_POOL *pool_ptr,
    UINT (*snmp_agent_username_process)(struct NX_SNMP_AGENT_STRUCT
        *agent_ptr, UCHAR *username),
    UINT (*snmp_agent_get_process)(struct NX_SNMP_AGENT_STRUCT
        *agent_ptr, UCHAR *object_requested,
        NX_SNMP_OBJECT_DATA *object_data),
    UINT (*snmp_agent_getnext_process)(struct NX_SNMP_AGENT_STRUCT
        *agent_ptr, UCHAR *object_requested,
        NX_SNMP_OBJECT_DATA *object_data),
    UINT (*snmp_agent_set_process)(struct NX_SNMP_AGENT_STRUCT
        *agent_ptr, UCHAR *object_requested,
        NX_SNMP_OBJECT_DATA *object_data));
```

Description

This service creates a SNMP Agent on the specified IP instance.

Input Parameters

agent_ptr Pointer to SNMP Agent control block.

snmp_agent_name Pointer to the SNMP Agent name string.

ip_ptr Pointer to IP instance.

stack_ptr Pointer to SNMP Agent thread stack pointer.

stack_size Stack size in bytes.

pool_ptr Pointer the default packet pool for this
SNMP Agent.

snmp_agent_username_process

Function pointer to application's username
handling routine.

snmp_agent_get_process

Function pointer to application's GET request
handling routine.

snmp_agent_getnext_process

Function pointer to application's GETNEXT request handling routine.

snmp_agent_set_process

Function pointer to application's SET request handling routine.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP Agent create.
NX_SNMP_ERROR	(0x100)	SNMP Agent create error.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```

NX_SNMP_AGENT my_agent;

/* Create the SNMP Agent "my_agent." */
status = nx_snmp_agent_create(&my_agent, "My SNMP Agent", &ip_0, stack_start_ptr,
                             4096, &pool_0, my_username_processing, my_get_processing,
                             my_getnext_processing, my_set_processing);

/* If status is NX_SUCCESS the SNMP Agent "my_agent" has been created. */

```

nx_snmp_agent_current_version_get

Get the SNMP packet version

Prototype

```
UINT nx_snmp_agent_current_version_get(NX_SNMP_AGENT *agent_ptr,
                                       UINT *version);
```

Description

This service retrieves the SNMP version parsed from the most recent SNMP packet received.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
version	Pointer to the SNMP version parsed from received SNMP packet

Return Values

NX_SUCCESS	(0x00)	Successful SNMP version get
NX_PTR_ERROR	(0x07)	Invalid pointer input

Allowed From

Threads

Example

```
UINT          snmp_version;
NX_SNMP_AGENT my_agent;

/* Get the version of the last received SNMP packet. */
status = nx_snmp_agent_current_version_get (&my_agent, &snmp_version);

/* If status is NX_SUCCESS, snmp_version contains the received packet SNMP
version. */
```

nx_snmp_agent_private_string_test

Verify private string matches Agent private string

Prototype

```
UINT nx_snmp_agent_private_string_test(NX_SNMP_AGENT *agent_ptr,
                                       UCHAR *community_string,
                                       UINT *is_private);
```

Description

This service compares the null terminated input community string with the SNMP agent private string and indicates if they match.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
community_string	Pointer to string to compare
is_private	Pointer to result of comparison NX_TRUE - string matches NX_FALSE - string does not match

Return Values

NX_SUCCESS	(0x00)	Successful comparison
NX_PTR_ERROR	(0x07)	Invalid pointer input

Allowed From

Threads

Example

```
UINT          is_private;
UCHAR         *community_string_ptr;
NX_SNMP_AGENT my_agent;

/* Determine if the community string matches the agent private string */
status = nx_snmp_agent_private_string_test(&my_agent, community_string_ptr,
                                           &is_private);

/* If status is NX_SUCCESS, is_private will indicate if there is a match. If
   is_private is NX_TRUE, they match. */
```

nx_snmp_agent_public_string_test

Verify received public string matches Agent's public string

Prototype

```
UINT nx_snmp_agent_public_string_test(NX_SNMP_AGENT *agent_ptr,
                                       UCHAR *community_string,
                                       UINT *is_public);
```

Description

This service compares a null terminated input community string with the SNMP agent public string and indicates if they match.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
community_string	Pointer to string to compare
is_public	Pointer to result of comparison NX_TRUE - string matches NX_FALSE - string does not match

Return Values

NX_SUCCESS	(0x00)	Successful comparison
NX_PTR_ERROR	(0x07)	Invalid pointer input

Allowed From

Threads

Example

```
UINT          is_public;
UCHAR         *community_string_ptr;
NX_SNMP_AGENT my_agent;

/* Determine if the community string matches the agent public string */
status = nx_snmp_agent_public_string_test(&my_agent, community_string_ptr,
                                           &is_public);

/* If status is NX_SUCCESS, is_public will indicate if there is a match. If
is_public is true they match. */
```


nx_snmp_agent_version_set

Set the SNMP agent status for each SNMP version

Prototype

```
UINT nx_snmp_agent_version_set(NX_SNMP_AGENT *agent_ptr,
                               UINT enabled_v1, UINT enable_v2,
                               UINT enable_v3);
```

Description

This service sets the status (enabled/disabled) for each of the SNMP versions, V1, V2 and V3 on the SNMP agent. Note that the user configurable options, NX_SNMP_DISABLE_V1, NX_SNMP_DISABLE_V2, and NX_SNMP_DISABLE_V3, will override these run time settings. By default, the SNMP agent is enabled for all three versions.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
enabled_v1	Sets enabled status for SNMP V1 to on/off.
enabled_v2	Sets enabled status for SNMP V2 to on/off.
enabled_v3	Sets enabled status for SNMP V3 to on/off.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP version set
NX_PTR_ERROR	(0x07)	Invalid pointer input

Allowed From

Threads

Example

```
UINT          v1_on = NX_TRUE;
UINT          v2_on = NX_TRUE;
UINT          v3_on = NX_FALSE;

NX_SNMP_AGENT my_agent;

/* Enable/Disable each SNMP protocol (version) for the SNMP Agent */
```

```
status = nx_snmp_agent_version_set(&my_agent, v1_on, v2_on, v3_on);
```

```
/* If status is NX_SUCCESS, my_agent is enabled only for v1 and v2 assuming  
NX_SNMP_DISABLE_V1 and NX_SNMP_DISABLE_V2 are not defined. */
```

nx_snmp_agent_private_string_set

Set the SNMP agent private string

Prototype

```
UINT nx_snmp_agent_private_string_set(NX_SNMP_AGENT *agent_ptr,
                                      UCHAR *community_string);
```

Description

This service sets the SNMP agent private community string with the input null terminated string. The default value is NULL (no private string set), such that any SNMP packet received with a “private” community string will not be accepted by the SNMP agent for read/write access. The input string must be less than or equal to the user configurable NX_SNMP_MAX_USER_NAME-1 (to allow room for null termination) size.

Input Parameters

agent_ptr Pointer to SNMP Agent control block.

community_string Pointer to the private string to assign

Return Values

NX_SUCCESS	(0x00)	Successfully set private string
NX_SNMP_ERROR_TOOBIG	(0x01)	String size too large
NX_PTR_ERROR	(0x07)	Invalid pointer input

Allowed From

Threads

Example

```
NX_SNMP_AGENT my_agent;

/* Set the SNMP agent's private community string */
status = nx_snmp_agent_private_string_set(&my_agent, "private"));

/* If status is NX_SUCCESS, the SNMP agent private string is set. */
```

nx_snmp_agent_public_string_set

Set the SNMP agent public string

Prototype

```
UINT nx_snmp_agent_public_string_set(NX_SNMP_AGENT *agent_ptr,
                                     UCHAR *community_string);
```

Description

This service sets the SNMP agent public community string with the input null terminated string. The `community_string` must be less than or equal to the user configurable `NX_SNMP_MAX_USER_NAME-1` (to allow room for null termination) size.

Input Parameters

agent_ptr Pointer to SNMP Agent control block.

community_string Pointer to the public string to assign

Return Values

NX_SUCCESS	(0x00)	Successfully set public string
NX_SNMP_ERROR_TOOBIG	(0x01)	String size too large
NX_PTR_ERROR	(0x07)	Invalid pointer input

Allowed From

Threads

Example

```
NX_SNMP_AGENT my_agent;

/* Set the SNMP agent's public string. */
nx_snmp_agent_public_string_set(&my_agent, "my_public");

/* If status is NX_SUCCESS, the SNMP agent public string is set. */
```

nx_snmp_agent_delete

Delete SNMP agent

Prototype

```
UINT nx_snmp_agent_delete(NX_SNMP_AGENT *agent_ptr);
```

Description

This service deletes a previously created SNMP Agent.

Input Parameters

agent_ptr Pointer to SNMP Agent control block.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP Agent delete.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Delete the SNMP Agent "my_agent." */  
status = nx_snmp_agent_delete(&my_agent);  
  
/* If status is NX_SUCCESS the SNMP Agent "my_agent" has been deleted. */
```

nx_snmp_agent_set_interface

Set the SNMP agent network interface

Prototype

```
UINT nx_snmp_agent_set_interface(NX_SNMP_AGENT *agent_ptr,
                                UINT if_index);
```

Description

This service sets the SNMP network interface for the SNMP Agent as specified by the input interface index. This is only useful for SNMP host applications with NetX Duo 5.6 or higher which support multiple network interfaces. The default value if not specified by the host is zero, for the primary interface.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
if_index	Index specifying the SNMP interface.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP interface set.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Set the SNMP Agent "my_agent" to the secondary interface. */
if_index = 1;
status = nx_snmp_agent_set_interface(&my_agent, if_index);

/* If status is NX_SUCCESS the SNMP agent interface is set. */
```

nx_snmp_agent_md5_key_create

Create md5 key (SNMP v3 only)

Prototype

```
UINT nx_snmp_agent_md5_key_create(NX_SNMP_AGENT *agent_ptr,
                                   UCHAR *password,
                                   NX_SNMP_SECURITY_KEY
                                   *destination_key);
```

Description

This service creates a MD5 key that can be used for authentication and encryption.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
password	Pointer to password string.
destination_key	Pointer to SNMP key data structure.

Return Values

NX_SUCCESS	(0x00)	Successful key create.
NX_NOT_ENABLED	(0x14)	Security not enabled.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
NX_SNMP_SECURITY_KEY my_key;

/* Create the MD5 key for "my_agent." */
status = nx_snmp_agent_md5_key_create(&my_agent, "authpw", &my_key);

/* If status is NX_SUCCESS an MD5 key has been created. */
```

nx_snmp_agent_priv_trap_key_use

Specify encryption key for trap messages

Prototype

```
UINT nx_snmp_agent_priv_trap_key_use(NX_SNMP_AGENT *agent_ptr,
                                     NX_SNMP_SECURITY_KEY *key);
```

Description

This service specifies that a previously created privacy key is to be used for encryption and decryption of SNMPv3 trap messages.

Note that an authentication key must be previously created. SNMP v3 privacy (encryption) requires authentication. See `nx_snmp_agent_auth_trap_key_use` for details.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
key	Pointer to previously create key.

Return Values

NX_SUCCESS	(0x00)	Successful privacy key set.
NX_NOT_ENABLED	(0x14)	Security not enabled.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Use the "my_privacy_key" for the SNMP Agent "my_agent" trap messages. */
status = nx_snmp_agent_priv_trap_key_use(&my_agent, &my_privacy_key);

/* If status is NX_SUCCESS the privacy key is registered with the SNMP agent. */
```


nx_snmp_agent_privacy_key_use

Specify encryption key for response messages

Prototype

```
UINT nx_snmp_agent_privacy_key_use(NX_SNMP_AGENT *agent_ptr,
                                   NX_SNMP_SECURITY_KEY *key);
```

Description

This service specifies that the previously created key is to be used for encryption and decryption of SNMPv3 response messages.

Note that an authentication key must have previously been specified. SNMP v3 encryption requires creation of an authentication key as well. See `nx_snmp_agent_authentication_key_use` for details.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
key	Pointer to previously create key.

Return Values

NX_SUCCESS	(0x00)	Successful privacy key set.
NX_NOT_ENABLED	(0x14)	Security not enabled.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Use the "my_privacy_key" for the SNMP Agent "my_agent." */
status = nx_snmp_agent_privacy_key_use(&my_agent, &my_privacy_key);

/* If status is NX_SUCCESS the privacy key is registered with the SNMP agent. */
```

nx_snmp_agent_sha_key_create

Create SHA key (SNMP v3 only)

Prototype

```
UINT nx_snmp_agent_sha_key_create(NX_SNMP_AGENT *agent_ptr,
                                   UCHAR *password,
                                   NX_SNMP_SECURITY_KEY
                                   *destination_key);
```

Description

This service creates a SHA key that can be used for authentication and encryption.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
password	Pointer to password string.
destination_key	Pointer to SNMP key data structure.

Return Values

NX_SUCCESS	(0x00)	Successful key create.
NX_SNMP_ERROR	(0x100)	Key create error.
NX_PTR_ERROR	(0x07)	Invalid SNMP Agent or key pointer.

Allowed From

Initialization, Threads

Example

```
NX_SNMP_SECURITY_KEY my_key;

/* Create the SHA key for "my_agent." */
status = nx_snmp_agent_sha_key_create(&my_agent, "authpw", &my_key);

/* If status is NX_SUCCESS the key for the password "authpw" has been created. */
```

nx_snmp_agent_start

Start SNMP agent

Prototype

```
UINT nx_snmp_agent_start(NX_SNMP_AGENT *agent_ptr);
```

Description

This service binds the UDP socket to the SNMP port 161 and starts the SNMP Agent thread task.

Input Parameters

agent_ptr Pointer to SNMP Agent control block.

Return Values

NX_SUCCESS	(0x00)	Successful start of SNMP Agent.
NX_SNMP_ERROR	(0x100)	SNMP Agent start error.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Start the previously created SNMP Agent "my_agent." */
status = nx_snmp_agent_start(&my_agent);

/* If status is NX_SUCCESS the SNMP Agent "my_agent" has been started. */
```

nx_snmp_agent_stop

Stop SNMP agent

Prototype

```
UINT nx_snmp_agent_stop(NX_SNMP_AGENT *agent_ptr);
```

Description

This service stops the SNMP Agent thread task and unbinds the UDP socket to the SNMP port.

Input Parameters

agent_ptr Pointer to SNMP Agent control block.

Return Values

NX_SUCCESS	(0x00)	Successful stop of SNMP Agent.
NX_PTR_ERROR	(0x07)	Invalid SNMP Agent pointer.

Allowed From

Threads

Example

```
/* Stop the previously created and started SNMP Agent "my_agent." */
status = nx_snmp_agent_stop(&my_agent);

/* If status is NX_SUCCESS the SNMP Agent "my_agent" has been stopped. */
```

nx_snmp_agent_trap_send

Send SNMPv1 trap (*IPv4 only*)

Prototype

```
UINT nx_snmp_agent_trap_send(NX_SNMP_AGENT *agent_ptr,
                             ULONG ip_address, UCHAR *enterprise,
                             UINT trap_type, UINT trap_code,
                             ULONG elapsed_time,
                             NX_SNMP_TRAP_OBJECT *object_list_ptr);
```

Description

This service sends an SNMP trap to the SNMP Manager at the specified IPv4 address. The preferred method for sending an SNMP trap in NetX Duo is to use the *nxd_snmp_agent_trap_send* service.

nx_snmp_agent_trap_send is included in NetX Duo to support existing NetX SNMP Agent applications.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.												
ip_address	IPv4 address of the SNMP Manager.												
enterprise	Enterprise object ID string (sysObectID).												
trap_type	Type of trap requested, as follows: <table data-bbox="617 1281 1341 1501"> <tr><td>NX_SNMP_TRAP_COLDSTART</td><td>(0)</td></tr> <tr><td>NX_SNMP_TRAP_WARMSTART</td><td>(1)</td></tr> <tr><td>NX_SNMP_TRAP_LINKDOWN</td><td>(2)</td></tr> <tr><td>NX_SNMP_TRAP_LINKUP</td><td>(3)</td></tr> <tr><td>NX_SNMP_TRAP_AUTHENTICATE_FAILURE</td><td>(4)</td></tr> <tr><td>NX_SNMP_TRAP_EGPNEIGHBORLOSS</td><td>(5)</td></tr> </table>	NX_SNMP_TRAP_COLDSTART	(0)	NX_SNMP_TRAP_WARMSTART	(1)	NX_SNMP_TRAP_LINKDOWN	(2)	NX_SNMP_TRAP_LINKUP	(3)	NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)	NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)
NX_SNMP_TRAP_COLDSTART	(0)												
NX_SNMP_TRAP_WARMSTART	(1)												
NX_SNMP_TRAP_LINKDOWN	(2)												
NX_SNMP_TRAP_LINKUP	(3)												
NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)												
NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)												
trap_code	Specific trap code.												
elapsed_time	Time system has been up (sysUpTime).												
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.												

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_NOT_ENABLED	(0x14)	SNMPv1 not enabled.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Threads

Example

```

NX_SNMP_TRAP_OBJECT trap_list[5];

ULONG dest_ip_address = IP_ADDRESS(1,2,3,4);

/* Build list of objects to supply in the trap. */
trap_list[0].nx_snmp_object_string_ptr = "1.3.6.1.2.1.2.2.1.1.0";
trap_list[0].nx_snmp_object_data.nx_snmp_object_data_type = NX_SNMP_INTEGER;
trap_list[0].nx_snmp_object_data.nx_snmp_object_data_msw = counter;
trap_list[1].nx_snmp_object_string_ptr = "1.3.6.1.2.1.1.3.0";
trap_list[1].nx_snmp_object_data.nx_snmp_object_data_type = NX_SNMP_TIME_TICS;
trap_list[1].nx_snmp_object_data.nx_snmp_object_data_msw = tx_time_get();
trap_list[2].nx_snmp_object_string_ptr = NX_NULL; /* Terminate list! */

/* Send trap to SNMP manager at 193.2.2.61. */
status = nx_snmp_agent_trap_send(&my_agent, dest_ip_address,
                                "1.3.6.7.7.7", NX_SNMP_TRAP_LINKUP, counter++,
                                tx_time_get(), trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```

nxd_snmp_agent_trap_send

Send SNMPv1 trap (*IPv4 and IPv6*)

Prototype

```
UINT nxd_snmp_agent_trap_send(NX_SNMP_AGENT *agent_ptr,
                              ULONG ip_address, UCHAR *enterprise, UINT trap_type,
                              UINT trap_code, ULONG elapsed_time,
                              NX_SNMP_TRAP_OBJECT *object_list_ptr);
```

Description

This service sends an SNMP trap to the SNMP Manager at the specified IP address. The equivalent method for sending an SNMP trap in NetX is the *nxd_snmp_agent_trap_send* service. .

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.												
ip_address	IPv4 or IPv6 address of the SNMP Manager.												
enterprise	Enterprise object ID string (sysObjectID).												
trap_type	Type of trap requested, as follows: <table data-bbox="617 1176 1341 1407"> <tr><td>NX_SNMP_TRAP_COLDSTART</td><td>(0)</td></tr> <tr><td>NX_SNMP_TRAP_WARMSTART</td><td>(1)</td></tr> <tr><td>NX_SNMP_TRAP_LINKDOWN</td><td>(2)</td></tr> <tr><td>NX_SNMP_TRAP_LINKUP</td><td>(3)</td></tr> <tr><td>NX_SNMP_TRAP_AUTHENTICATE_FAILURE</td><td>(4)</td></tr> <tr><td>NX_SNMP_TRAP_EGPNEIGHBORLOSS</td><td>(5)</td></tr> </table>	NX_SNMP_TRAP_COLDSTART	(0)	NX_SNMP_TRAP_WARMSTART	(1)	NX_SNMP_TRAP_LINKDOWN	(2)	NX_SNMP_TRAP_LINKUP	(3)	NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)	NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)
NX_SNMP_TRAP_COLDSTART	(0)												
NX_SNMP_TRAP_WARMSTART	(1)												
NX_SNMP_TRAP_LINKDOWN	(2)												
NX_SNMP_TRAP_LINKUP	(3)												
NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)												
NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)												
trap_code	Specific trap code.												
elapsed_time	Time system has been up (sysUpTime).												
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.												

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.

NX_NOT_ENABLED	(0x14)	SNMPv1 not enabled.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Threads

Example

```

NX_SNMP_TRAP_OBJECT trap_list[5];
NXD_ADDRESS dest_ip_address;

    dest_ip_address.nxd_ip_version = NX_IP_VERSION_V6 ;
    dest_ip_address.nxd_ip_address.v6[0] = 0x20010db8;
    dest_ip_address.nxd_ip_address.v6[1] = 0xf101;
    dest_ip_address.nxd_ip_address.v6[2] = 0x00000000;
    dest_ip_address.nxd_ip_address.v6[3] = 0x00000101;

/* Build list of objects to supply in the trap. */
trap_list[0].nx_snmp_object_string_ptr = "1.3.6.1.2.1.2.2.1.1.0";
trap_list[0].nx_snmp_object_data.nx_snmp_object_data_type = NX_SNMP_INTEGER;
trap_list[0].nx_snmp_object_data.nx_snmp_object_data_msw = counter;
trap_list[1].nx_snmp_object_string_ptr = "1.3.6.1.2.1.1.3.0";
trap_list[1].nx_snmp_object_data.nx_snmp_object_data_type = NX_SNMP_TIME_TICS;
trap_list[1].nx_snmp_object_data.nx_snmp_object_data_msw = tx_time_get();
trap_list[2].nx_snmp_object_string_ptr = NX_NULL; /* Terminate list! */

/* Send trap to SNMP manager at 193.2.2.61. */
status = nxd_snmp_agent_trap_send(&my_agent,&dest_ip_address,
    "1.3.6.7.7.7", NX_SNMP_TRAP_LINKUP, counter++, tx_time_get(),
    trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```


nx_snmp_agent_trapv2_send

Send SNMPv2 trap (IPv4 only)

Prototype

```
UINT nx_snmp_agent_trapv2_send(NX_SNMP_AGENT *agent_ptr,
                               NXD_ADDRESS *ip_address, UCHAR *community, UINT trap_type,
                               ULONG elapsed_time, NX_SNMP_TRAP_OBJECT *object_list_ptr);
```

Description

This service sends an SNMPv2 trap to the SNMP Manager at the specified IPv4 address. The preferred method for sending an SNMP trap in NetX Duo is to use the *nxd_snmp_agent_trapv2_send* service. *nx_snmp_agent_trapv2_send* is included in NetX Duo to support existing NetX SNMP Agent applications.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
ip_address	IPv4 address of the SNMP Manager.
community	Community name (username).
trap_type	Type of trap requested. The standard events are: <div style="margin-left: 40px;"> NX_SNMP_TRAP_COLDSTART (0) NX_SNMP_TRAP_WARMSTART (1) NX_SNMP_TRAP_LINKDOWN (2) NX_SNMP_TRAP_LINKUP (3) NX_SNMP_TRAP_AUTHENTICATE_FAILURE (4) NX_SNMP_TRAP_EGPNEIGHBORLOSS (5) </div> <p>For proprietary data:</p> <div style="margin-left: 40px;"> NX_SNMP_TRAP_CUSTOM (0xFFFFFFFF) <div style="margin-left: 40px;">(defined in <i>nxd_snmp.h</i>)</div> </div>
elapsed_time	Time system has been up (sysUpTime).
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_NOT_ENABLED	(0x14)	SNMPv2 not enabled.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Threads

Example

```

NX_SNMP_TRAP_OBJECT trap_list[5];
ULONG dest_ip_address = IP_ADDRESS(1,2,3,4);

/* Build an empty object list, since it is not needed for the
   NX_SNMP_TRAP_COLDSTART trap. */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;

/* Send trap to SNMP manager at 193.2.2.61. */
Status = nx_snmp_agent_trapv2_send(&my_agent, dest_ip_address, "public",
                                   NX_SNMP_TRAP_COLDSTART, tx_time_get(), trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```

nx_snmp_agent_trapv2_oid_send

Send SNMPv2 trap specifying OID directly

Prototype

```
UINT nx_snmp_agent_trapv2_oid_send(NX_SNMP_AGENT *agent_ptr,
                                   ULONG ip_address, UCHAR *community,
                                   UCHAR *oid, ULONG elapsed_time,
                                   NX_SNMP_TRAP_OBJECT
                                   *object_list_ptr);
```

Description

This service sends an SNMPv2 trap to the SNMP Manager at the specified IP address (IPv4 only) and allows the caller to specify the OID directly. The preferred method for sending an SNMP trap with specified OID in NetX Duo is to use the *nxd_snmp_agent_trapv2_oid_send* service. *nx_snmp_agent_trapv2_oid_send* is included in NetX Duo to support existing NetX SNMP Agent applications.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
ip_address	IP address of SNMP Manager.
community	Community name (username).
oid	Pointer to buffer containing OID.
elapsed_time	Time system has been up (sysUpTime).
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_PTR_ERROR	(0x16)	Invalid SNMP Agent or parameter pointer.
NX_IP_ADDRESS_ERROR	(0x21)	Invalid destination IP address.
NX_OPTION_ERROR	(0x0a)	Invalid parameter.

Allowed From

Threads

Example

```
NX_SNMP_TRAP_OBJECT trap_list[5];
/* Build an empty object list */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;
/* Send trap to SNMP manager at 193.2.2.61. */
Status = nx_snmp_agent_trapv2_oid_send(&my_agent, IP_ADDRESS(193,2,2,61),
                                         "public", (UCHAR *)"0.9.9.9.9.9.9.9",
                                         tx_time_get(), trap_list);
/* If status is NX_SUCCESS the SNMP trap has been sent. */
```

nxd_snmp_agent_trapv2_send

Send SNMPv2 trap (IPv4 and IPv6)

Prototype

```
UINT nxd_snmp_agent_trapv2_send(NX_SNMP_AGENT *agent_ptr,
                                NXD_ADDRESS *ip_address,
                                UCHAR *community, UINT trap_type,
                                ULONG elapsed_time,
                                NX_SNMP_TRAP_OBJECT *object_list_ptr);
```

Description

This service sends an SNMP V2 trap to the SNMP Manager at the specified IP address.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.																
ip_address	IP (IPv4 or IPv6) address of the SNMP Manager.																
community	Community name (username).																
trap_type	Type of trap requested. The standard events are: <table data-bbox="613 1176 1357 1396"> <tr><td>NX_SNMP_TRAP_COLDSTART</td><td>(0)</td></tr> <tr><td>NX_SNMP_TRAP_WARMSTART</td><td>(1)</td></tr> <tr><td>NX_SNMP_TRAP_LINKDOWN</td><td>(2)</td></tr> <tr><td>NX_SNMP_TRAP_LINKUP</td><td>(3)</td></tr> <tr><td>NX_SNMP_TRAP_AUTHENTICATE_FAILURE</td><td>(4)</td></tr> <tr><td>NX_SNMP_TRAP_EGPNEIGHBORLOSS</td><td>(5)</td></tr> </table> <p>For proprietary data:</p> <table data-bbox="613 1501 1357 1585"> <tr><td>NX_SNMP_TRAP_CUSTOM</td><td>(0xFFFFFFFF)</td></tr> <tr><td colspan="2">(defined in <i>nxd_snmp.h</i>)</td></tr> </table>	NX_SNMP_TRAP_COLDSTART	(0)	NX_SNMP_TRAP_WARMSTART	(1)	NX_SNMP_TRAP_LINKDOWN	(2)	NX_SNMP_TRAP_LINKUP	(3)	NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)	NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)	NX_SNMP_TRAP_CUSTOM	(0xFFFFFFFF)	(defined in <i>nxd_snmp.h</i>)	
NX_SNMP_TRAP_COLDSTART	(0)																
NX_SNMP_TRAP_WARMSTART	(1)																
NX_SNMP_TRAP_LINKDOWN	(2)																
NX_SNMP_TRAP_LINKUP	(3)																
NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)																
NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)																
NX_SNMP_TRAP_CUSTOM	(0xFFFFFFFF)																
(defined in <i>nxd_snmp.h</i>)																	
elapsed_time	Time system has been up (sysUpTime).																
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.																

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_NOT_ENABLED	(0x14)	SNMPv2 not enabled.
NX_SNMP_INVALID_IP_PROTOCOL_ERROR	(0x104)	Unsupported IP version
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Threads

Example

```

NX_SNMP_TRAP_OBJECT trap_list[5];
NXD_ADDRESS dest_ip_address;

    dest_ip_address.nxd_ip_version = NX_IP_VERSION_V6 ;
    dest_ip_address.nxd_ip_address.v6[0] = 0x20010db8;
    dest_ip_address.nxd_ip_address.v6[1] = 0xf101;
    dest_ip_address.nxd_ip_address.v6[2] = 0x00000000;
    dest_ip_address.nxd_ip_address.v6[3] = 0x00000101;

/* Build an empty object list, since it is not needed for the
NX_SNMP_TRAP_COLDSTART trap. */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;

/* Send a standard event trap to SNMP manager at 193.2.2.61. */
Status = nxd_snmp_agent_trapv2_send(&my_agent,&dest_ip_address, "public",
                                   NX_SNMP_TRAP_COLDSTART, tx_time_get(),
                                   trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```

nxd_snmp_agent_trapv2_oid_send

Send SNMPv2 trap specifying OID directly

Prototype

```
UINT nxd_snmp_agent_trapv2_oid_send(NX_SNMP_AGENT *agent_ptr,
                                     NXD_ADDRESS *ip_address,
                                     UCHAR *community,
                                     UCHAR *oid, ULONG elapsed_time,
                                     NX_SNMP_TRAP_OBJECT
                                     *object_list_ptr);
```

Description

This service sends an SNMP v2 trap to the SNMP Manager at the specified IP address (IPv4/IPv6) and allows the caller to specify the OID directly.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
ip_address	IP address of SNMP Manager (IPv4/IPv6).
community	Community name (username).
oid	Pointer to buffer containing OID.
elapsed_time	Time system has been up (sysUpTime).
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_PTR_ERROR	(0x16)	Invalid SNMP Agent or parameter pointer.
NX_IP_ADDRESS_ERROR	(0x21)	Invalid destination IP address.
NX_OPTION_ERROR	(0x0a)	Invalid parameter.

Allowed From

Threads

Example

```

NX_SNMP_TRAP_OBJECT trap_list[5];
NXD_ADDRESS          address;

/* Build an empty object list */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;

address.nxd_ip_version = NX_IP_VERSION_V4;
address.nxd_ip_address.v4 = IP_ADDRESS(193,2,2,61)

/* Send trap to SNMP manager at 193.2.2.61. */
Status = nxd_snmp_agent_trapv2_oid_send(&my_agent, &address,
                                         "public", (UCHAR *)"0.9.9.9.9.9.9.9",
                                         tx_time_get(), trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```


nx_snmp_agent_trapv3_send

Send SNMPv3 trap (IPv4 only)

Prototype

```
UINT nx_snmp_agent_trapv3_send(NX_SNMP_AGENT *agent_ptr,
                               ULONG ip_address, UCHAR *username, UINT trap_type,
                               ULONG elapsed_time, NX_SNMP_TRAP_OBJECT *object_list_ptr);
```

Description

This service sends an SNMPv3 trap to the SNMP Manager at the specified IPv4 address. The preferred method for sending an SNMP trap in NetX Duo is to use the *nxd_snmp_agent_trapv3_send* service. *nx_snmp_agent_trapv3_send* is included in NetX Duo to support existing NetX SNMP Agent applications.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
ip_address	IPv4 address of the SNMP Manager.
username	Community name (username).
trap_type	Type of trap requested. The standard events are: <div style="margin-left: 40px;"> NX_SNMP_TRAP_COLDSTART (0) NX_SNMP_TRAP_WARMSTART (1) NX_SNMP_TRAP_LINKDOWN (2) NX_SNMP_TRAP_LINKUP (3) NX_SNMP_TRAP_AUTHENTICATE_FAILURE (4) NX_SNMP_TRAP_EGPNEIGHBORLOSS (5) </div> <p>For proprietary data:</p> <div style="margin-left: 40px;"> NX_SNMP_TRAP_CUSTOM (0xFFFFFFFF) <div style="margin-left: 40px;">(defined in <i>nxd_snmp.h</i>)</div> </div>
elapsed_time	Time system has been up (sysUpTime).
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_NOT_ENABLED	(0x14)	SNMPv3 not enabled.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```

NX_SNMP_TRAP_OBJECT trap_list[5];
ULONG dest_ip_address = IP_ADDRESS(1,2,3,4);

/* Build an empty object list, since it is not needed for the
   NX_SNMP_TRAP_COLDSTART trap. */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;

/* Send trap to SNMP manager at 193.2.2.61. */
Status = nx_snmp_agent_trapv3_send(&my_agent, dest_ip_address, "public",
                                   NX_SNMP_TRAP_COLDSTART, tx_time_get(), trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```

nx_snmp_agent_trapv3_oid_send

Send SNMPv3 trap specifying OID directly

Prototype

```
UINT nx_snmp_agent_trapv3_oid_send(NX_SNMP_AGENT *agent_ptr,
                                   ULONG ip_address, UCHAR *username,
                                   UCHAR *oid, ULONG elapsed_time,
                                   NX_SNMP_TRAP_OBJECT
                                   *object_list_ptr);
```

Description

This service sends an SNMPv3 trap to the SNMP Manager at the specified IP address (IPv4 only) and allows the caller to specify the OID directly. The preferred method for sending an SNMP trap with specified OID in NetX Duo is to use the *nxd_snmp_agent_trapv3_oid_send* service. *nx_snmp_agent_trapv3_oid_send* is included in NetX Duo to support existing NetX SNMP Agent applications.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
ip_address	IP address of SNMP Manager.
username	Community name (username).
oid	Pointer to buffer containing OID.
elapsed_time	Time system has been up (sysUpTime).
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_PTR_ERROR	(0x16)	Invalid SNMP Agent or parameter pointer.
NX_IP_ADDRESS_ERROR	(0x21)	Invalid destination IP address.
NX_OPTION_ERROR	(0x0a)	Invalid parameter.

Allowed From

Threads

Example

```
NX_SNMP_TRAP_OBJECT trap_list[5];
/* Build an empty object list */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;
/* Send trap to SNMP manager at 193.2.2.61. */
Status = nx_snmp_agent_trapv3_oid_send(&my_agent, IP_ADDRESS(193,2,2,61),
                                         "public", (UCHAR *)"0.9.9.9.9.9.9.9",
                                         tx_time_get(), trap_list);
/* If status is NX_SUCCESS the SNMP trap has been sent. */
```

nxd_snmp_agent_trapv3_send

Send SNMPv3 trap (IPv4 and IPv6)

Prototype

```
UINT nxd_snmp_agent_trapv3_send(NX_SNMP_AGENT *agent_ptr,
                                NXD_ADDRESS *ip_address,
                                UCHAR *username, UINT trap_type,
                                ULONG elapsed_time,
                                NX_SNMP_TRAP_OBJECT *object_list_ptr);
```

Description

This service sends an SNMP trap to the SNMP Manager at the specified IP address. This trap is basically the same as the SNMP v2 trap, except the trap message format is contained in the SNMP v3 PDU.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.																
ip_address	IP (IPv4 or IPv6) address of the SNMP Manager.																
username	Community name (username).																
trap_type	Type of trap requested. The standard events are: <table data-bbox="617 1213 1357 1438"> <tr><td>NX_SNMP_TRAP_COLDSTART</td><td>(0)</td></tr> <tr><td>NX_SNMP_TRAP_WARMSTART</td><td>(1)</td></tr> <tr><td>NX_SNMP_TRAP_LINKDOWN</td><td>(2)</td></tr> <tr><td>NX_SNMP_TRAP_LINKUP</td><td>(3)</td></tr> <tr><td>NX_SNMP_TRAP_AUTHENTICATE_FAILURE</td><td>(4)</td></tr> <tr><td>NX_SNMP_TRAP_EGPNEIGHBORLOSS</td><td>(5)</td></tr> </table> <p>For proprietary data:</p> <table data-bbox="617 1543 1357 1617"> <tr><td>NX_SNMP_TRAP_CUSTOM</td><td>(0xFFFFFFFF)</td></tr> <tr><td colspan="2">(defined in <i>nxd_snmp.h</i>)</td></tr> </table>	NX_SNMP_TRAP_COLDSTART	(0)	NX_SNMP_TRAP_WARMSTART	(1)	NX_SNMP_TRAP_LINKDOWN	(2)	NX_SNMP_TRAP_LINKUP	(3)	NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)	NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)	NX_SNMP_TRAP_CUSTOM	(0xFFFFFFFF)	(defined in <i>nxd_snmp.h</i>)	
NX_SNMP_TRAP_COLDSTART	(0)																
NX_SNMP_TRAP_WARMSTART	(1)																
NX_SNMP_TRAP_LINKDOWN	(2)																
NX_SNMP_TRAP_LINKUP	(3)																
NX_SNMP_TRAP_AUTHENTICATE_FAILURE	(4)																
NX_SNMP_TRAP_EGPNEIGHBORLOSS	(5)																
NX_SNMP_TRAP_CUSTOM	(0xFFFFFFFF)																
(defined in <i>nxd_snmp.h</i>)																	
elapsed_time	Time system has been up (sysUpTime).																
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.																

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_NOT_ENABLED	(0x14)	SNMPv3 not enabled.
NX_SNMP_INVALID_IP_PROTOCOL_ERROR		
	(0x104)	Unsupported IP version
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Threads

Example

```

NX_SNMP_TRAP_OBJECT trap_list[5];
NXD_ADDRESS dest_ip_address;

    dest_ip_address.nxd_ip_version = NX_IP_VERSION_V6 ;
    dest_ip_address.nxd_ip_address.v6[0] = 0x20010db8;
    dest_ip_address.nxd_ip_address.v6[1] = 0xf101;
    dest_ip_address.nxd_ip_address.v6[2] = 0x00000000;
    dest_ip_address.nxd_ip_address.v6[3] = 0x00000101;

/* Build an empty object list, since it is not needed for the
NX_SNMP_TRAP_COLDSTART trap. */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;

/* Send trap to SNMP manager at 193.2.2.61. */
Status = nxd_snmp_agent_trapv3_send(&my_agent, &dest_ip_address, "public",
                                     NX_SNMP_TRAP_COLDSTART, tx_time_get(),
                                     trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```

nxd_snmp_agent_trapv3_oid_send

Send SNMPv3 trap specifying OID directly

Prototype

```
UINT nxd_snmp_agent_trapv3_oid_send(NX_SNMP_AGENT *agent_ptr,
                                     NXD_ADDRESS *ip_address,
                                     UCHAR *username,
                                     UCHAR *oid, ULONG elapsed_time,
                                     NX_SNMP_TRAP_OBJECT
                                     *object_list_ptr);
```

Description

This service sends an SNMPv3 trap to the SNMP Manager at the specified IP address (IPv4/IPv6) and allows the caller to specify the OID directly.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block.
ip_address	Pointer to IP address of SNMP Manager.
username	Username (community name).
oid	Pointer to buffer containing OID.
elapsed_time	Time system has been up (sysUpTime).
object_list_ptr	Array of objects and their associated values to be included in the SNMP trap. The list is NX_NULL terminated.

Return Values

NX_SUCCESS	(0x00)	Successful SNMP trap send.
NX_SNMP_ERROR	(0x100)	Error sending SNMP trap.
NX_PTR_ERROR	(0x16)	Invalid SNMP Agent or parameter pointer.
NX_IP_ADDRESS_ERROR	(0x21)	Invalid destination IP address.

Allowed From

Threads

Example

```

NXD_ADDRESS      ip_address;
NX_SNMP_TRAP_OBJECT trap_list[5];

/* Build an empty object list */
trap_list[0].nx_snmp_object_string_ptr = NX_NULL;

ip_address.nxd_ip_version = NX_IP_VERSION_V4;
ip_address.nxd_ip_address.v4 = IP_ADDRESS(193,2,2,61);

/* Send trap to SNMP manager at 193.2.2.61. */
Status = nxd_snmp_agent_trapv3_oid_send(&my_agent, &ip_address,
                                         "public", (UCHAR *)"0.9.9.9.9.9.9.9",
                                         tx_time_get(), trap_list);

/* If status is NX_SUCCESS the SNMP trap has been sent. */

```


nx_snmp_agent_v3_context_boots_set

Set the number of reboots (if SNMPv3 enabled)

Prototype

```
UINT nx_snmp_agent_v3_context_boots_set(NX_SNMP_AGENT *agent_ptr,
                                         UINT boots);
```

Description

This service sets the number of reboots recorded by the SNMP agent. This service is only available if SNMPv3 is enabled for the SNMP agent because boot count is only used in the SNMPv3 protocol.

Input Parameters

agent_ptr	Pointer to SNMP Agent control block
boots	The value to set SNMP Agent boot count to

Return Values

NX_SUCCESS	(0x00)	Successfully set boot count
NX_SNMP_ERROR	(0x100)	Error setting boot count
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
UINT my_boots = 4;
if (my_agent.nx_snmp_agent_v3_enabled == NX_TRUE)
{
    status = nx_snmp_agent_v3_context_boots_set(&my_agent, my_boots);
}

/* If status is NX_SUCCESS the SNMP boot count is set. */
```

nx_snmp_object_compare

Compare two objects

Prototype

```
UINT nx_snmp_object_compare(UCHAR *object, UCHAR *reference_object);
```

Description

This service compares the supplied object ID with the reference object ID. Both object IDs are in the ASCII SMI notation, e.g., both object must start with the ASCII string "1.3.6".

Input Parameters

object Pointer to object ID.

reference_object Pointer to the reference object ID.

Return Values

NX_SUCCESS	(0x00)	The object matches the reference object.
NX_SNMP_NEXT_ENTRY	(0x101)	The object is less than the reference object.
NX_SNMP_ERROR	(0x100)	The object is greater than the reference object.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Compare "requested_object" with the sysDescr object ID of
   "1.3.6.1.2.1.1.1.0". */
status = nx_snmp_object_compare(requested_object, "1.3.6.1.2.1.1.1.0");

/* If status is NX_SUCCESS, requested_object is the sysDescr object.
   Otherwise, if status is NX_SNMP_NEXT_ENTRY, the requested object is
   less than the sysDescr. If status is NX_SNMP_ERROR, the object is
   greater than sysDescr. */
```

nx_snmp_object_copy

Copy an object

Prototype

```
UINT nx_snmp_object_copy(UCHAR *source_object_name,  
                        UCHAR *destination_object_name);
```

Description

This service copies the source object in ASCII SIM notation to the destination object.

Input Parameters

source_object_name	Pointer to source object ID.
destination_object_name	Pointer to destination object ID.

Return Values

size	Number of bytes copied to destination name. If error, zero is returned.
-------------	---

Allowed From

Initialization, Threads

Example

```
/* Copy "my_object" to "my_new_object". */  
size = nx_snmp_object_copy(my_object, my_new_object);  
/* size contains the number of bytes copied. */
```

nx_snmp_object_counter_get

Get counter object

Prototype

```
UINT nx_snmp_object_counter_get(VOID *source_ptr,
                                NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the counter object at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to counter source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The counter object has been successfully retrieved.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Get the ifInOctets (1.3.6.1.2.1.2.2.1.10.0) MIB-2 object. */
status = nx_snmp_object_counter_get(&ifInOctets, my_object);

/* If status is NX_SUCCESS, the ifInOctets object has been
   retrieved and is ready to be returned. */
```

nx_snmp_object_counter_set

Set counter object

Prototype

```
UINT nx_snmp_object_counter_set(VOID *destination_ptr,
                                NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the counter at the address specified by the destination pointer with the counter value in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to counter destination.
object_data	Pointer to counter source object structure.

Return Values

NX_SUCCESS	(0x00)	The counter object has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Set the ifInOctets (1.3.6.1.2.1.2.2.1.10.0) MIB-2 object with
   the counter object value contained in my_object. */
status = nx_snmp_object_counter_set(&ifInOctets, my_object);

/* If status is NX_SUCCESS, the ifInOctets object has been
   set. */
```

nx_snmp_object_counter64_get

Get 64-bit counter object

Prototype

```
UINT nx_snmp_object_counter64_get(VOID *source_ptr,
                                   NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the 64-bit counter object at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to counter source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The counter object has been successfully retrieved.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of my_64_bit_counter and place it into my_object
   for return. */
status = nx_snmp_object_counter64_get(&my_64_bit_counter, my_object);

/* If status is NX_SUCCESS, the my_64_bit_counter object has been
   retrieved and is ready to be returned. */
```

nx_snmp_object_counter64_set

Set 64-bit counter object

Prototype

```
UINT nx_snmp_object_counter64_set(VOID *destination_ptr,
                                   NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the 64-bit counter at the address specified by the destination pointer with the counter value in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to counter destination.
object_data	Pointer to counter source object structure.

Return Values

NX_SUCCESS	(0x00)	The counter object has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer.

Allowed From

Initialization, Threads

Example

```
/* Set the value of my_64_bit_counter with the value in my_object. */
status = nx_snmp_object_counter64_set(&my_64_bit_counter, my_object);

/* If status is NX_SUCCESS, the my_64_bit_counter object has been
   set. */
```

nx_snmp_object_end_of_mib

Set end-of-mib value

Prototype

```
UINT nx_snmp_object_end_of_mib(VOID *not_used_ptr,
                               NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service creates an object signaling the end of the MIB and is typically called from the GET or GETNEXT application callback routine.

Input Parameters

not_used_ptr	Pointer not used – should be NX_NULL.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The end-of-mib object has been successfully built.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Place an end-of-mib value in my_object. */
status = nx_snmp_object_end_of_mib(NX_NULL, my_object);
/* If status is NX_SUCCESS, the my_object is now an end-of-mib object. */
```


nx_snmp_object_gauge_get

Get gauge object

Prototype

```
UINT nx_snmp_object_gauge_get(VOID *source_ptr,
                               NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the gauge object at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to gauge source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The gauge object has been successfully retrieved.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of ifSpeed (1.3.6.1.2.1.2.2.1.5.0) and place it in my_object
   for return. */
status = nx_snmp_object_gauge_get(&ifSpeed, my_object);
/* If status is NX_SUCCESS, the my_object now contains the ifSpeed gauge value. */
```

nx_snmp_object_gauge_set

Set gauge object

Prototype

```
UINT nx_snmp_object_gauge_set(VOID *destination_ptr,
                               NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the gauge at the address specified by the destination pointer with the gauge value in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to gauge destination.
object_data	Pointer to gauge source object structure.

Return Values

NX_SUCCESS	(0x00)	The gauge object has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the value of "my_gauge" from the gauge value in my_object. */
status = nx_snmp_object_gauge_set(&my_gauge, my_object);

/* If status is NX_SUCCESS, the my_gauge now contains the new gauge value. */
```

nx_snmp_object_id_get

Get object id

Prototype

```
UINT nx_snmp_object_id_get(VOID *source_ptr,
                           NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the object ID (in ASCII SIM notation) at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to object ID source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The object ID has been successfully retrieved.
NX_SNMP_ERROR	(0x100)	Invalid length of object
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of sysObjectID(1.3.6.1.2.1.1.2.0) and place it in my_object
   for return. */
status = nx_snmp_object_id_get(&sysObjectID, my_object);
/* If status is NX_SUCCESS, the my_object now contains the sysObjectID value. */
```

nx_snmp_object_id_set

Set object id

Prototype

```
UINT nx_snmp_object_id_set(VOID *destination_ptr,
                           NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the object ID (in ASCII SIM notation) at the address specified by the destination pointer with the object ID in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to object ID destination.
object_data	Pointer to object structure.

Return Values

NX_SUCCESS	(0x00)	The object ID has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the string "my_object_id" with the object ID value contained
   in my_object. */
status = nx_snmp_object_id_set(my_object_id, my_object);
/* If status is NX_SUCCESS, the my_object_id now contains the object ID value. */
```

nx_snmp_object_integer_get

Get integer object

Prototype

```
UINT nx_snmp_object_integer_get(VOID *source_ptr,
                                NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the integer object at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to integer source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The integer object has been successfully retrieved.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of sysServices (1.3.6.1.2.1.1.7.0) and place it in my_object
   for return. */
status = nx_snmp_object_integer_get(&sysServices, my_object);

/* If status is NX_SUCCESS, the my_object now contains the sysServices value. */
```

nx_snmp_object_integer_set

Set integer object

Prototype

```
UINT nx_snmp_object_integer_set(VOID *destination_ptr,
                                NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the integer at the address specified by the destination pointer with the integer value in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to integer destination.
object_data	Pointer to integer source object structure.

Return Values

NX_SUCCESS	(0x00)	The integer object has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the value of ifAdminStatus from the integer value in my_object. */
status = nx_snmp_object_integer_set(&ifAdminStatus, my_object);

/* If status is NX_SUCCESS, ifAdminStatus now contains the new integer value. */
```

nx_snmp_object_ip_address_get

Get IP address object (IPv4 only)

Prototype

```
UINT nx_snmp_object_ip_address_get(VOID *source_ptr,
                                   NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the IP address object at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to IPv4 address source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The IP address object has been successfully retrieved.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of ipAdEntAddr (1.3.6.1.2.1.4.20.1.1.0) and place it in my_object
   for return. */
status = nx_snmp_object_ip_address_get(&ipAdEntAddr, my_object);

/* If status is NX_SUCCESS, the my_object now contains the ipAdEntAddr value. */
```

nx_snmp_object_ipv6_address_get

Get IP address object (IPv6 only)

Prototype

```
UINT nx_snmp_object_ipv6_address_get(VOID *source_ptr,
                                     NX_SNMP_OBJECT_DATA
                                     *object_data);
```

Description

This service retrieves the IPv6 address object at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to IPv6 address source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The IP address object has been successfully retrieved.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Incorrect input SNMP object code
NX_NOT_ENABLED	(0x14)	IPv6 not enabled
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of ipAdEntAddr (1.3.6.1.2.1.4.20.1.1.0) and place it in my_object
   for return. */
status = nx_snmp_object_ipv6_address_get(&ipAdEntAddr, my_object);
/* If status is NX_SUCCESS, the my_object now contains the ipAdEntAddr value. */
```


nx_snmp_object_ip_address_set

Set IPv4 address object

Prototype

```
UINT nx_snmp_object_ip_address_set(VOID *destination_ptr,
                                   NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the IPv4 address at the address specified by the destination pointer with the IP address in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to IP address to set.
object_data	Pointer to IP address object structure.

Return Values

NX_SUCCESS	(0x00)	The IP address object has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the value of atNetworkAddress to the IP address in my_object. */
status = nx_snmp_object_ip_address_set(&atNetworkAddress, my_object);

/* If status is NX_SUCCESS, atNetworkAddress now contains the new IP address. */
```

nx_snmp_object_ipv6_address_set

Set IPv6 address object

Prototype

```
UINT nx_snmp_object_ipv6_address_set(VOID *destination_ptr,
                                     NX_SNMP_OBJECT_DATA
                                     *object_data);
```

Description

This service sets the IPv6 address at the address specified by the destination pointer with the IP address in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to IP address to set.
object_data	Pointer to IP address object structure.

Return Values

NX_SUCCESS	(0x00)	The IPv6 address has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_NOT_ENABLED	(0x14)	IPv6 not enabled
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the value of atNetworkAddress to the IP address in my_object. */
status = nx_snmp_object_ipv6_address_set(&atNetworkAddress, my_object);

/* If status is NX_SUCCESS, atNetworkAddress now contains the new IP address. */
```

nx_snmp_object_no_instance

Set no-instance object

Prototype

```
UINT nx_snmp_object_no_instance(VOID *not_used_ptr,
                                NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service creates an object signaling that there was no instance of the specified object and is typically called from the GET or GETNEXT application callback routine.

Input Parameters

not_used_ptr	Pointer not used – should be NX_NULL.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The no-instance object has been successfully built.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Place no-instance value in my_object. */
status = nx_snmp_object_no_instance(NX_NULL, my_object);
/* If status is NX_SUCCESS, the my_object is now a no-instance object. */
```

nx_snmp_object_not_found

Set not-found object

Prototype

```
UINT nx_snmp_object_not_found(VOID *not_used_ptr,
                              NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service creates an object signaling the object was not found and is typically called from the GET or GETNEXT application callback routine.

Input Parameters

not_used_ptr	Pointer not used – should be NX_NULL.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The not-found object has been successfully built.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Place not-found value in my_object. */
status = nx_snmp_object_not_found(NX_NULL, my_object);
/* If status is NX_SUCCESS, the my_object is now a not-found object. */
```

nx_snmp_object_octet_string_get

Get octet string object

Prototype

```
UINT nx_snmp_object_octet_string_get(VOID *source_ptr,
                                     NX_SNMP_OBJECT_DATA *object_data,
                                     UINT length);
```

Description

This service retrieves the octet string at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to octet string source.
object_data	Pointer to destination object structure.
length	Number of bytes in octet string.

Return Values

NX_SUCCESS	(0x00)	The octet string object has been successfully retrieved.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of the 6-byte ifPhysAddress (1.3.6.1.2.1.2.2.1.6.0) and place
   it in my_object for return. */
status = nx_snmp_object_octet_string_get(ifPhysAddress, my_object, 6);
/* If status is NX_SUCCESS, the my_object now contains the ifPhysAddress value. */
```

nx_snmp_object_octet_string_set

Set octet string object

Prototype

```
UINT nx_snmp_object_octet_string_set(VOID *destination_ptr,
                                     NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the octet string at the address specified by the destination pointer with the octet string in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to octet string destination.
object_data	Pointer to octet string source object structure.

Return Values

NX_SUCCESS	(0x00)	The octet string object has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the value of sysContact (1.3.6.1.2.1.1.4.0) from the
   octet string in my_object. */
status = nx_snmp_object_octet_string_set(sysContact, my_object);
/* If status is NX_SUCCESS, sysContact now contains the new octet string. */
```

nx_snmp_object_string_get

Get ASCII string object

Prototype

```
UINT nx_snmp_object_string_get(VOID *source_ptr,
                               NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the ASCII string at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to ASCII string source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The ASCII string object has been successfully retrieved.
NX_SNMP_ERROR	(0x100)	String is too big
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of the sysDescr (1.3.6.1.2.1.1.1.0) and place
   it in my_object for return. */
status = nx_snmp_object_string_get(sysDescr, my_object);
/* If status is NX_SUCCESS, the my_object now contains the sysDescr string. */
```

nx_snmp_object_string_set

Set ASCII string object

Prototype

```
UINT nx_snmp_object_string_set(VOID *destination_ptr,
                               NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the ASCII string at the address specified by the destination pointer with the ASCII string in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to ASCII string destination.
object_data	Pointer to ASCII string source object structure.

Return Values

NX_SUCCESS	(0x00)	The ASCII string object has been successfully set.
NX_SNMP_ERROR	(0x100)	String too large.
NX_SNMP_ERROR_BADVALUE	(0x03)	Invalid character in string
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the value of sysContact (1.3.6.1.2.1.1.4.0) from the
   ASCII string in my_object. */
status = nx_snmp_object_string_set(sysContact, my_object);
/* If status is NX_SUCCESS, sysContact now contains the new ASCII string. */
```


nx_snmp_object_timetics_get

Get timetics object

Prototype

```
UINT nx_snmp_object_timetics_get(VOID *source_ptr,
                                NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service retrieves the timetics at the address specified by the source pointer and places it in the NetX object data structure. This routine is typically called from the GET or GETNEXT application callback routine.

Input Parameters

source_ptr	Pointer to timetics source.
object_data	Pointer to destination object structure.

Return Values

NX_SUCCESS	(0x00)	The timetics object has been successfully retrieved.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Get the value of the sysUpTime (1.3.6.1.2.1.1.3.0) and place
   it in my_object for return. */
status = nx_snmp_object_timetics_get(sysUpTime, my_object);
/* If status is NX_SUCCESS, the my_object now contains the sysUpTime value. */
```

nx_snmp_object_timetics_set

Set timetics object

Prototype

```
UINT nx_snmp_object_timetics_set(VOID *destination_ptr,
                                NX_SNMP_OBJECT_DATA *object_data);
```

Description

This service sets the timetics variable at the address specified by the destination pointer with the timetics in the NetX object data structure. This routine is typically called from the SET application callback routine.

Input Parameters

destination_ptr	Pointer to timetics destination.
object_data	Pointer to timetics source object structure.

Return Values

NX_SUCCESS	(0x00)	The timetics object has been successfully set.
NX_SNMP_ERROR_WRONGTYPE	(0x07)	Invalid object type.
NX_PTR_ERROR	(0x07)	Invalid input pointer

Allowed From

Initialization, Threads

Example

```
/* Set the value of "my_time" from the timetics value in my_object. */
status = nx_snmp_object_timetics_set(&my_time, my_object);

/* If status is NX_SUCCESS, my_time now contains the new timetics. */
```



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics Corporation

TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan

Renesas Electronics America Inc.

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.

Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3

Tel: +1-905-237-2004

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K

Tel: +44-1628-651-700

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany

Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China

Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China

Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong

Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan

Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949

Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia

Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India

Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea

Tel: +82-2-558-3737, Fax: +82-2-558-5338

NetX Duo™ Simple Network Management Protocol Agent for
NetX Duo (NetX Duo SNMP) User Guide

Publication Date: Rev.5.11 Nov 8, 2018

Published by: Renesas Electronics Corporation

NetX Duo™ Simple Network Management
Protocol Agent for NetX Duo (NetX Duo SNMP)
User Guide



Renesas Electronics Corporation

R11UM0085EU0511