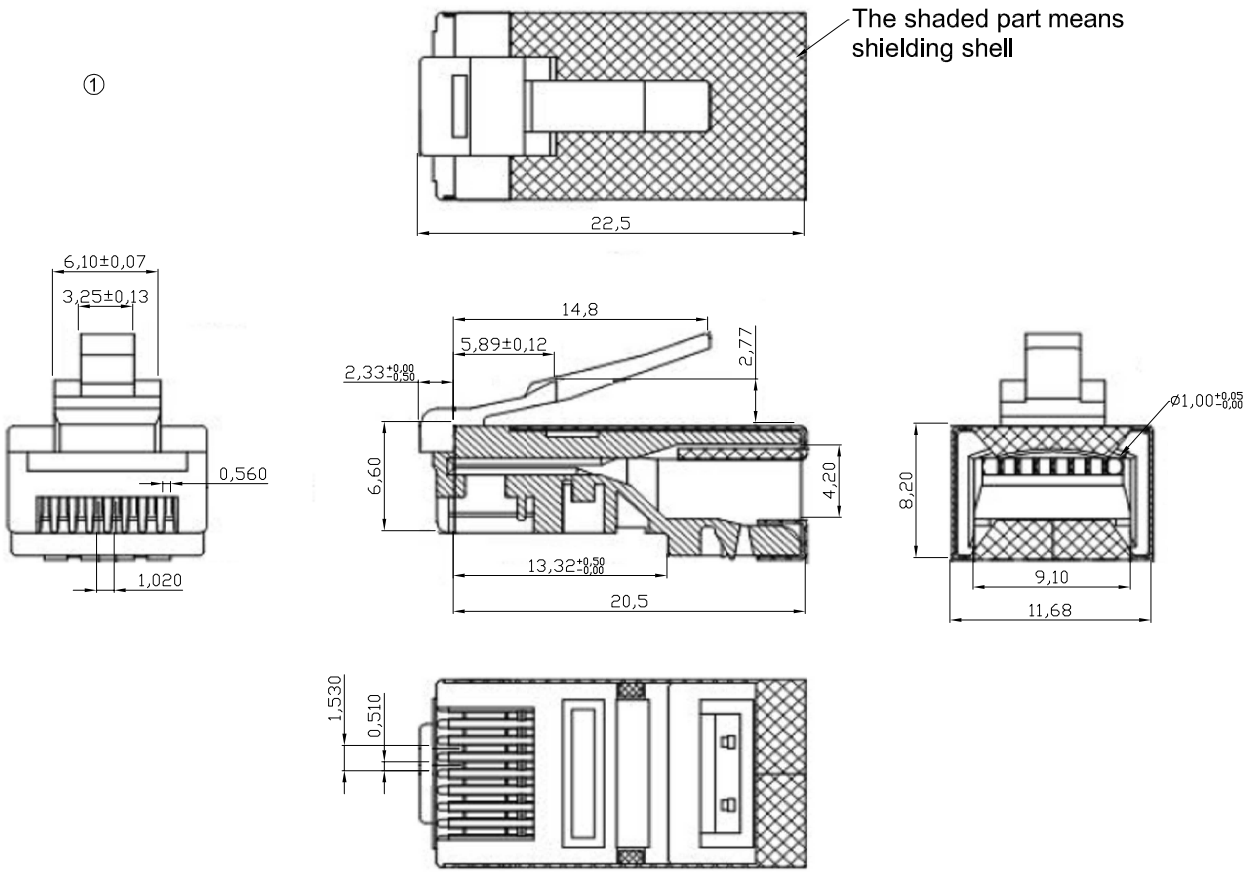

Specifications:

Material:
Housing: Poly Carbonate(PC) UL94V-2
Contact blade: High strength copper alloy
100 micron Nickel underplated
Plating type: 8% Phosphor Bronze
Plating thickness: 6u" gold plated
Operating temperature: -40°C to +125°C

Electrical:
Current rating: 250V AC max. at 2A
Dielectric: 500V AC
Insulation resistance: 500MΩ

Complies with FCC68/F
② Wire gauge: 30AWG-24AWG
Cable OD size: round cable 5.5~3.0mm
Wire size: 0.95±0.05mm

RoHS compliant
Unit: mm

Scale	Free						Date	Name
TOLERANCE						Drawn	29.04.2016	Amy
X.X	±0.20					Approved	03.04.2019	Amy
X.XX	±0.10							
X.XXX	±0.05	②	Add cable wire size information	03.04.2019	Amy			
DIM	TOL	①	Update the drawing	12.06.2016	Amy			
Angle	±2°	⓪	Drawn	29.04.2016	Amy			
Angle	TOL	Id.	Modification	Date	Name			

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No. A-MO 8/8-SRS

Drawing-No. ASS 7232 CO

rev02

Replace

Sheet