5000-step comparison | Loss gates passed

8 × A100 vs 8 × Ascend 910B2 · 500 loss records/run · 20/20 checks passed · Final DCP verified

Error plots use unsmoothed recorded losses. Performance is measured separately and is not a pass/fail speed gate.

Full-run mean error | gate ≤ 5%

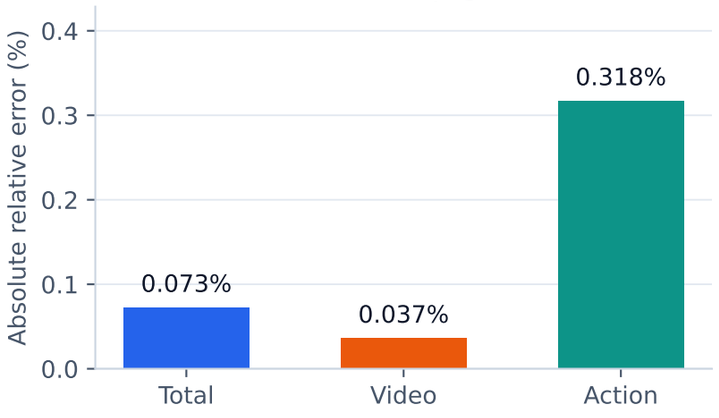

500-step window error | gate ≤ 10%

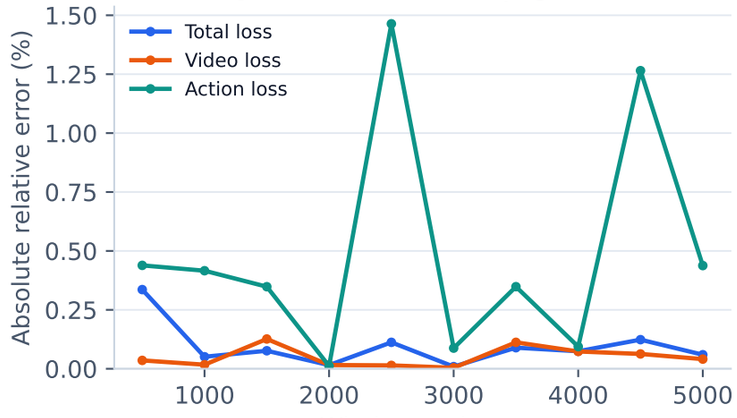

Mean step time

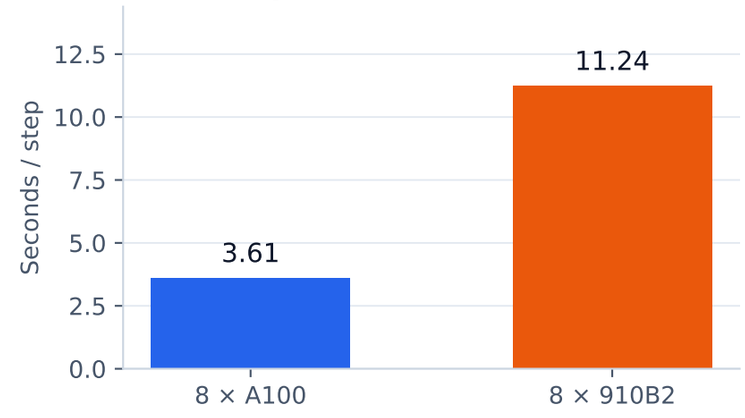

Training throughput

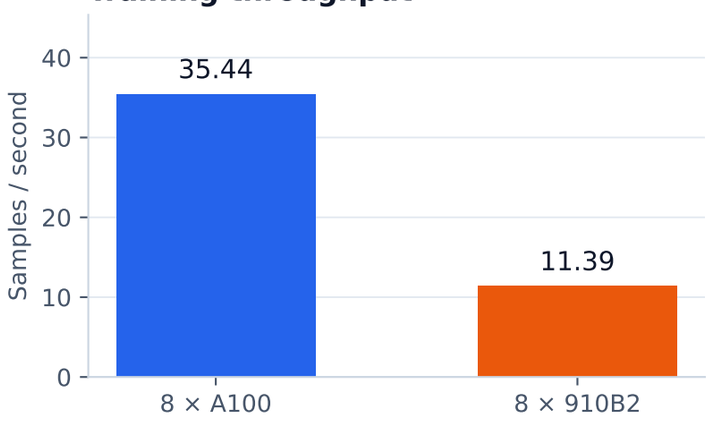

Framework peak allocated

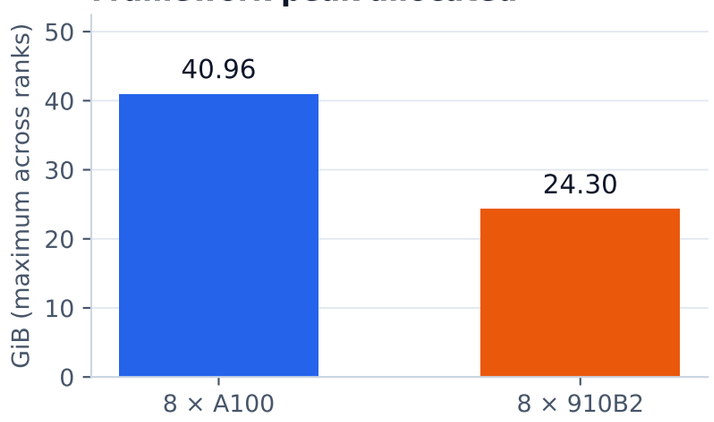

Framework peak reserved

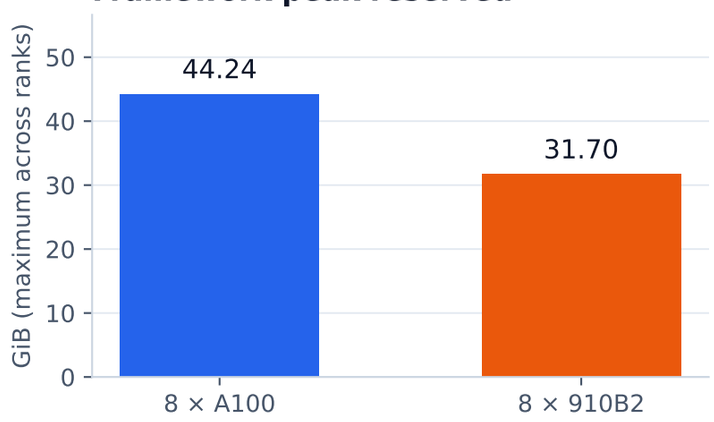

Performance: 4,920 steady steps per run; warmup, validation and checkpoint windows excluded; I/O and communication included.

Compile: A100 enabled / 910B2 disabled. Different hardware and kernels; these measurements do not isolate the effect of LiteGen.