
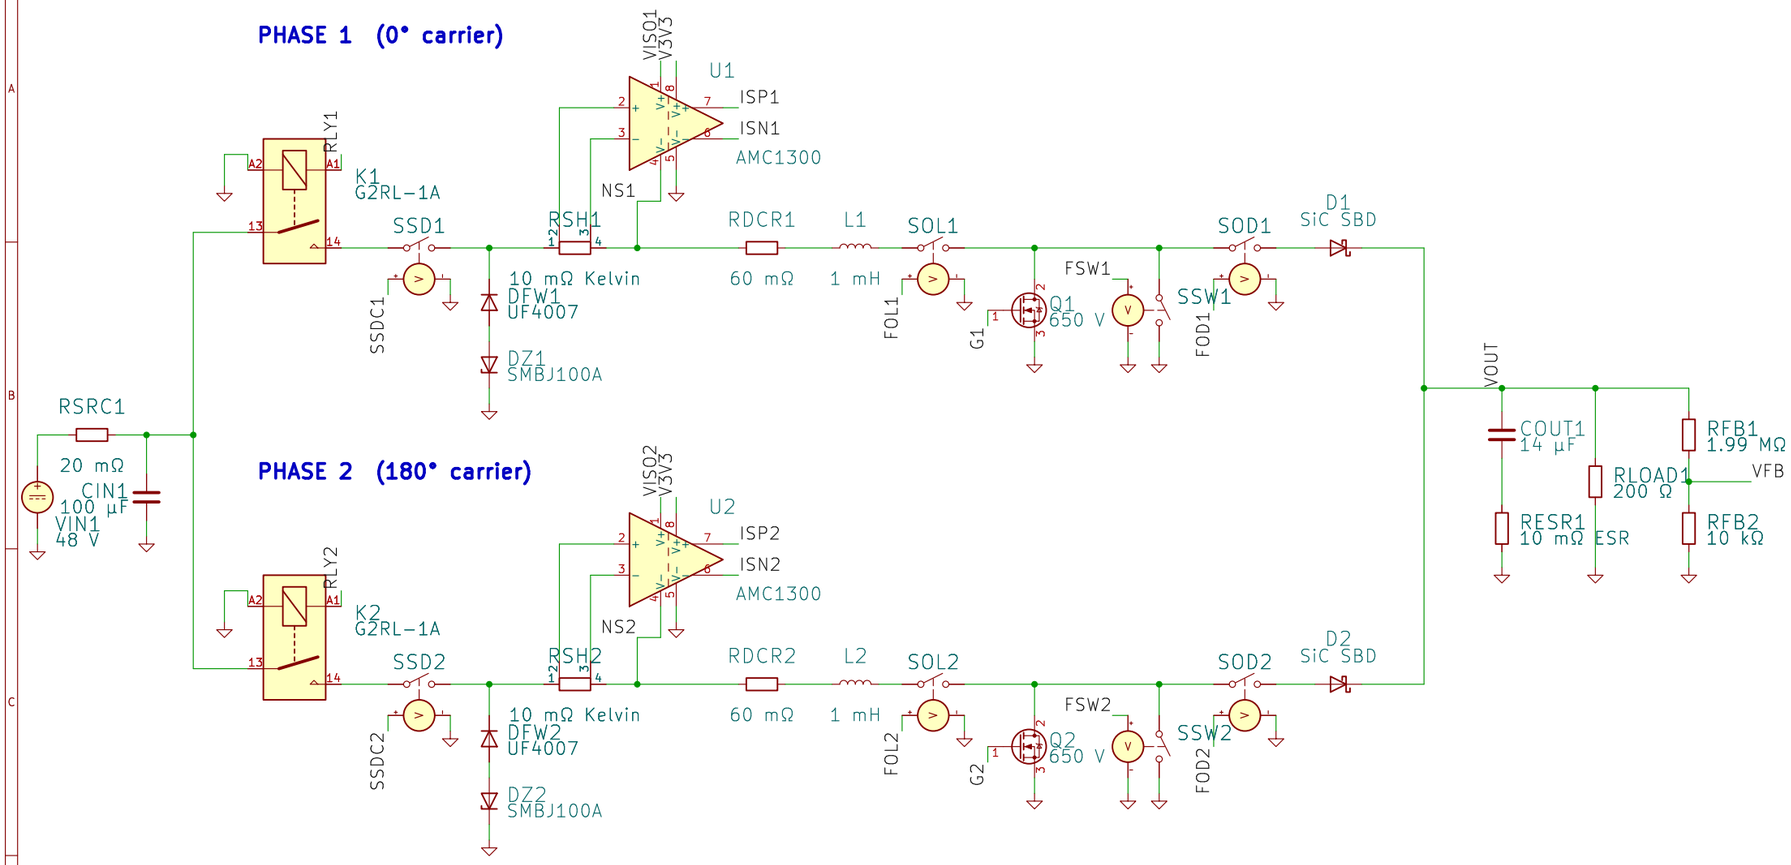



CONTROLLER INTERFACE, GATE DRIVE, FAULT INJECTION AND AUXILIARY SUPPLIES


CTRL: ngspice 'external' sources driven by the firmware model. INJ: fault-injection controls, stepped at t = 50 ms.

Phase 1

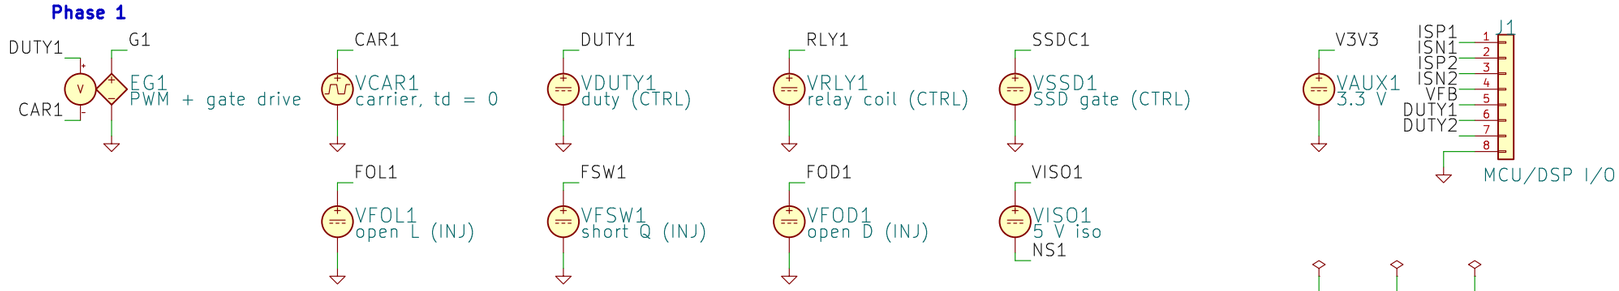

Phase 2

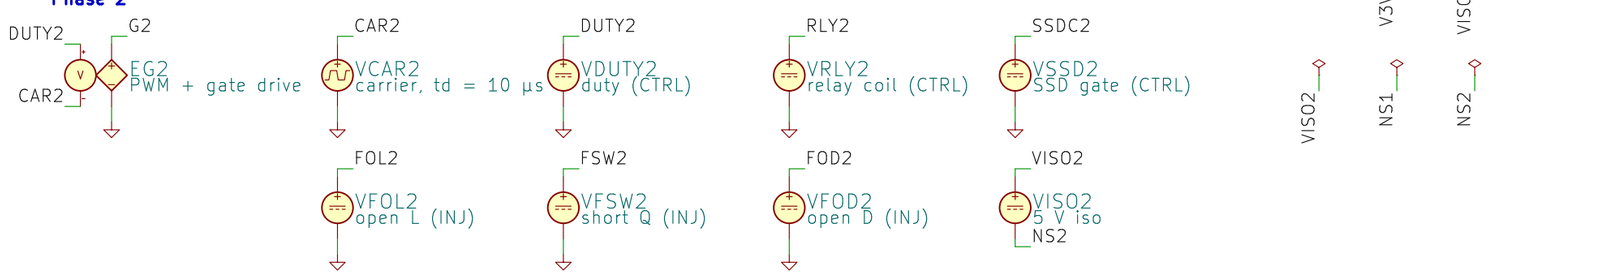



Same parts and connectivity as the simulated schematic (sim/check_wired_netlist.py)
2 x 1 mH, 50 kHz, 180 deg interleaved; input relay + SSD per phase; AMC1300 sensing

Sheet: /
File: ft_boost_wired.kicad_sch

Title: Fault-tolerant two-phase interleaved boost converter, 48 V to 200 V

Size: A3	Date: 2026-10-20	**Rev: B**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1