

Swing Start Check Valve

Check Valve

Features:

Strength (water) (MPa): 1.5Mpa


Sealing (water) (MPa) :1.1Mpa

Suitable medium: Vapour Water Oil Water

Features:

- 1.The structure length is short, its structure length is only the traditional flange check valve 1/4~1/8.
- 2.Small size, light weight, its weight is only the traditional flange check valve 1/4~1/20.
- 3.The valve flap closed fast, water hammer pressure is small.
- 4.Horizontal pipe or vertical pipe can be used, convenient installation.
- 5.The flow channel is unobstructed, the fluid resistance is small.
- 6.Sensitive action, good sealing performance.
- 7.Short stroke, close the impact force is small.
- 8.The overall structure is simple and compact, beautiful appearance.
- 9.Long service life, reliable performance.

PARAMETERS

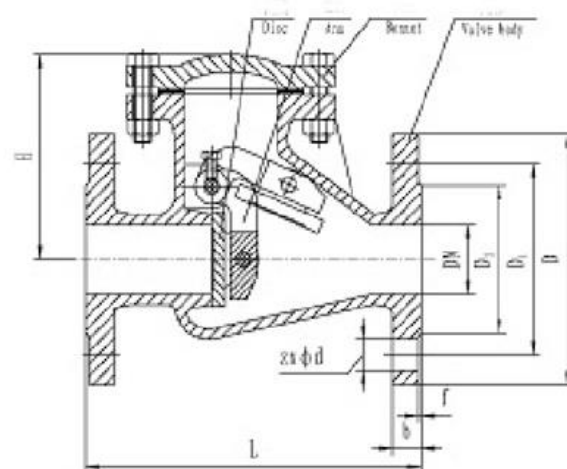

Type	DN	Measurement (mm)						
H44T/W/X -10		L	D	D1	D2	b-f	Z-Φ d	H
	40	200	145	110	85	18-3	4-Φ 18	110
	50	230	160	125	100	20-3	4-Φ 18	120
	65	290	180	145	120	20-3	4-Φ 18	130
	80	310	195	160	135	22-3	4-Φ 18	140
	100	350	215	180	155	22-3	8-Φ 18	170
	125	400	245	210	185	24-3	8-Φ 18	192
	150	480	280	240	210	24-3	8-Φ 23	215
	200	495	335	295	265	26-3	8-Φ 23	240
	250	600	390	350	320	28-3	12-Φ 23	265
	300	698	440	400	368	28-4	12-Φ 23	350
	350	800	500	460	428	30-4	16-Φ 23	405
	400	900	565	515	482	32-4	16-Φ 25	430
	500	978	670	620	585	34-4	20-Φ 25	480
	600	1295	780	725	685	36-5	20-Φ 31	622

