

Single Door Check Valve

Check Valve

Pressure: 1.0Mpa~4.0Mpa

Port Size:50-400

Media:water,steam,oil

Temperature of media: -29-400°C


Application:

Mainly applicable to water supply system, petroleum, chemical, metallurgy and other industrial sectors have limited installation space are most suitable place

Product features:

1. Length of the structure, the L is traditional flange check valve 1/4~1/8
2. Small size, light weight, the weight is traditional flange check valve 1/4~1/20
3. Close quickly, small water hammer pressure
4. Horizontal or vertical pipe can be used, easy to install
5. Flow smooth, little fluid resistance
6. Sensitive, good sealing performance
7. Short disc trip, valve impact force is small when closed
8. Overall structure, simple and compact, attractive appearance
9. Long life, high reliability

PARAMETERS

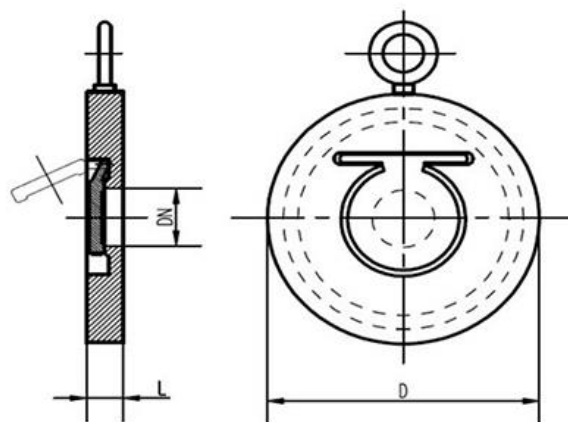

DN	L		PN10	PN16	PN25	PN40
	I	II	D	D	D	D
50	14.5	22	109	109	109	109
65	14.5	22	129	129	129	129
80	14.5	22	144	144	144	144
100	14.5	24	164	164	170	170
125	16	26	194	194	198	198
150	19	29	220	220	228	228
200	29	43	275	275	288	293
250	29	43	330	333	343	355
300	38	50	380	388	403	420
350	41	52	440	448	460	480
400	51	62	493	498	512	549

