



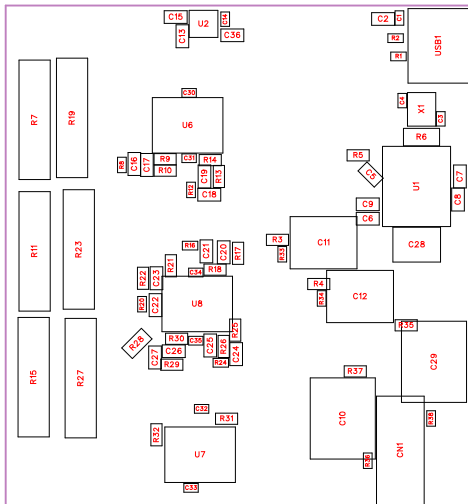



Item #	Quantity per board	Comment	Reference designators	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier	Unique ID	Pin Count	Category
1	7	100nF	C1,C30,C31,C32,C33,C34,C35	C0402	100nF	CL05B104KB54PNC	SAMSUNG(三星)	C307331	LCSC	UNIQUEC1, UNIQUEC1_0,UNIQUEC1_1,UNIQUEC1_2,UNIQUEC1_3,UNIQUEC1_4,UNIQUEC1_5	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
2	2	10uF	C2,C36	C0603	10uF	CL10A106MA8NRNC	SAMSUNG(三星)	C96446	LCSC	UNIQUEC2, UNIQUEC2_0	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
3	2	22pF	C3,C4	C0402	22pF	0402CG220J500NT	FH(风华)	C1555	LCSC	UNIQUEC3, UNIQUEC4	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
4	5	1uF	C5,C6,C7,C8,C9	C0603	1uF	CL10A105KB8NNNC	SAMSUNG(三星)	C15849	LCSC	gge4,gge4_0,gge5,gge5_0,gge6	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
5	2	470uF	C10,C29	CAP-SMD_BD8.0-L8.3-W8.3-FD	470uF	RVT1C471M0810	Chengx(承兴)	C82006	LCSC	gge17,gge18	2	Capacitors:Aluminum Electrolytic Capacitors - SMD
6	2	100uF	C11,C12	CAP-SMD_BD6.3-L6.6-W6.6-FD	100uF	RVT1V101M0607	Chengx(承兴)	C82002	LCSC	UNIQUEC11, UNIQUEC12	2	Capacitors:Aluminum Electrolytic Capacitors - SMD
7	2	2.2uF	C13,C15	C0603	2.2uF	CL10A225KO8NNNC	SAMSUNG(三星)	C23630	LCSC	UNIQUEC13, UNIQUEC15	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
8	1	1uF	C14	C0402	1uF	CL05A105KA5NQNC	SAMSUNG(三星)	C52923	LCSC	UNIQUEC14	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
9	2	470nF	C16,C22	C0603	470nF	CL10B474KA8NNNC	SAMSUNG(三星)	C1623	LCSC	UNIQUEC16, UNIQUEC22	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT

10	2	47nF	C17,C23	C0603	47nF	CL10B473KB8NNNC	SAMSUNG(三星)	C1622	LCSC	UNIQUEC17, UNIQUEC23	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
11	2	22nF	C18,C24	C0603	22nF	CL10B223KB8NNNC	SAMSUNG(三星)	C21122	LCSC	UNIQUEC18, UNIQUEC24	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
12	4	2.2nF	C19,C21,C25,C27	C0603	2.2nF	0603B222K500NT	FH(风华)	C1604	LCSC	UNIQUEC19, UNIQUEC21, UNIQUEC25, UNIQUEC27	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
13	2	220pF	C20,C26	C0603	220pF	GCM1885C2A221JA16D	muRata(村田)	C388907	LCSC	UNIQUEC20, UNIQUEC26	2	Capacitors:Multilayer Ceramic Capacitors MLCC - SMD/SMT
14	1	10uF	C28	CAP-SMD_BD4.0-L4.3-W4.3-FD-LS5.1	10uF	RVT1E100M0405	ACMECON(鼎容)	C22383790	LCSC	gge3	2	Capacitors:Aluminum Electrolytic Capacitors - SMD
15	1	PJ-3200	CN1	AUDIO-TH_PJ-3200		PJ-3200	XKB Connection(中国星坤)	C2689690	LCSC	UNIQUECN1	3	Connectors:Audio Connectors
16	2	5.1kΩ	R1,R2	R0402	5.1kΩ	0402WGF5101TCE	UNI-ROYAL(厚声)	C25905	LCSC	gge9,gge10	2	Resistors:Chip Resistor - Surface Mount
17	2	100Ω	R3,R4	R0603	100Ω	0603WAF1000T5E	UNI-ROYAL(厚声)	C22775	LCSC	UNIQUER3, UNIQUER4	2	Resistors:Chip Resistor - Surface Mount
18	1	1.5kΩ	R5	R0603	1.5kΩ	0603WAF1501T5E	UNI-ROYAL(厚声)	C22843	LCSC	UNIQUER5	2	Resistors:Chip Resistor - Surface Mount
19	1	1MΩ	R6	R1206	1MΩ	1206W4F1004T5E	UNI-ROYAL(厚声)	C17927	LCSC	UNIQUER6	2	Resistors:Chip Resistor - Surface Mount
20	6	10kΩ	R7,R11,R15,R19,R23,R27	RES-ADJ-SMD_L13.2-W3.0_RS08U111Z001	10kΩ	RS08U111Z001	ALPSALPINE(阿尔卑斯阿尔派)	C202411	LCSC	UNIQUER7, UNIQUER11, UNIQUER15, UNIQUER19, UNIQUER23, UNIQUER27	6	Resistors:Potentiometers, Variable Resistors

21	5	1kΩ	R8,R12,R16, R20,R24	R0402	1kΩ	0402WGF10 01TCE	UNI-ROYAL(厚声)	C11702	LCSC	UNIQUER8, UNIQUER12, UNIQUER16, UNIQUER20, UNIQUER24	2	Resistors:Chi p Resistor - Surface Mount
22	6	680Ω	R9,R14,R18, R21,R26,R30	R0603	680Ω	0603WAF68 00T5E	UNI-ROYAL(厚声)	C23228	LCSC	UNIQUER9, UNIQUER14, UNIQUER18, UNIQUER21, UNIQUER26, UNIQUER30	2	Resistors:Chi p Resistor - Surface Mount
23	6	47kΩ	R10,R13,R17 ,R22,R25,R2 9	R0603	47kΩ	0603WAF47 02T5E	UNI-ROYAL(厚声)	C25819	LCSC	UNIQUER10, UNIQUER13, UNIQUER17, UNIQUER22, UNIQUER25, UNIQUER29	2	Resistors:Chi p Resistor - Surface Mount
24	1	1kΩ	R28	R0805	1kΩ	0805W8F100 1T5E	UNI-ROYAL(厚声)	C17513	LCSC	gge11	2	Resistors:Chi p Resistor - Surface Mount
25	2	10kΩ	R31,R32	R0603	10kΩ	0603WAF10 02T5E	UNI-ROYAL(厚声)	C25804	LCSC	UNIQUER31, UNIQUER32	2	Resistors:Chi p Resistor - Surface Mount
26	2	10kΩ	R33,R34	R0402	10kΩ	0402WGF10 02TCE	UNI-ROYAL(厚声)	C25744	LCSC	gge1,gge2	2	Resistors:Chi p Resistor - Surface Mount
27	2	4.7Ω	R35,R37	R0603	4.7Ω	0603WAF47 0KT5E	UNI-ROYAL(厚声)	C23164	LCSC	gge15,gge16	2	Resistors:Chi p Resistor - Surface Mount
28	2	51kΩ	R36,R38	R0402	51kΩ	0402WGF51 02TCE	UNI-ROYAL(厚声)	C25794	LCSC	gge7,gge8	2	Resistors:Chi p Resistor - Surface Mount
29	1	PCM2704DB	U1	SSOP-28 L1 0.2-W5.3-P0. 65-LS7.8-TL		PCM2704DB	TI(德州仪器)	C2877458	LCSC	UNIQUEU1	28	Data Acquisit ion:ADCs/DA Cs - Special Purpose
30	1	LM2776DBV R	U2	SOT-23-6 L2 .9-W1.6-P0.9 5-LS2.8-BR		LM2776DBV R	TI(德州仪器)	C69527	LCSC	UNIQUEU2	6	Power Management (PMIC):Char ge Pumps
31	3	OPA1654AID R	U6,U7,U8	SOIC-14 L8. 7-W3.9-P1.2 7-LS6.0-BL		OPA1654AID R	TI(德州仪器)	C30026	LCSC	gge12,gge13 ,gge14	14	Amplifiers/Co mparators:Au dio Amplifiers
32	1	TYPE-C 16PIN 2MD(073)	USB1	USB-C-SMD TYPE-C-16 PIN-2MD-07 3		TYPE-C 16PIN 2MD(073)	SHOU HAN(首韩)	C2765186	LCSC	UNIQUEUSB 1	16	Connectors: USB Connectors

33	1	12MHz	X1	CRYSTAL-S MD_4P-L3.2- W2.5-BL	12MHz	X322512MS B4SI	YXC(扬兴晶 振)	C9002	LCSC	UNIQUEX1	4	Crystals, Oscillators, R esonators:Cr ystals
----	---	-------	----	-------------------------------------	-------	-------------------	---------------	-------	------	----------	---	---

LCSC Stock	LCSC Price	JLPCB Stock	JLPCB Price	Layer	Mounting Style	Add into BOM	Convert to PCB	3D Model Title	Device	Name	3D Model Transform	JLPCB Part Class
		8247341	0.0012	T	SMT	yes		C0402_L1.0-W0.5-H0.5	CL05B104KB54PNC	100nF	39.37,19.685,0,0,0,0,0,0	Basic Part
		2493229	0.008	T	SMT	yes		C0603_L1.6-W0.8-H0.8	CL10A106MA8NRNC	10uF	62.992,31.496,0,0,0,0,0,0	Basic Part
		653991	0.0009	T	SMT	yes		C0402_L1.0-W0.5-H0.5	0402CG220J500NT	22pF	39.37,19.685,0,0,0,0,0,0	Basic Part
		5154988	0.002	T	SMT	yes		C0603_L1.6-W0.8-H0.8	CL10A105KB8NNNC	1uF	62.992,31.496,0,0,0,0,0,0	Basic Part
		28	0.0267	T	SMT	yes		CAP-SMD_B D8.0-L8.3-W8.3-FD	RVT1C471M0810_C82006	470uF	393.7,326.771,0,180,0,0,0,0	Extended Part
		4758	0.0139	T	SMT	yes		CAP-SMD_B D6.3-L6.6-W6.6-FD	RVT1V101M0607_C82002	100uF	307.086,259.842,0,180,0,0,0,0	Extended Part
		1038072	0.0014	T	SMT	yes		C0603_L1.6-W0.8-H0.8	CL10A225K08NNNC	2.2uF	62.992,31.496,0,0,0,0,0,0	Basic Part
		3337358	0.0022	T	SMT	yes		C0402_L1.0-W0.5-H0.5	CL05A105KA5NQNC	1uF	39.37,19.685,0,0,0,0,0,0	Basic Part
		324484	0.0014	T	SMT	yes		C0603_L1.6-W0.8-H0.8	CL10B474KA8NNNC	470nF	62.992,31.496,0,0,0,0,0,0	Basic Part
		332403	0.0013	T	SMT	yes		C0603_L1.6-W0.8-H0.8	CL10B473KB8NNNC	47nF	62.992,31.496,0,0,0,0,0,0	Basic Part
		350252	0.0012	T	SMT	yes		C0603_L1.6-W0.8-H0.8	CL10B223KB8NNNC	22nF	62.992,31.496,0,0,0,0,0,0	Basic Part
		325168	0.0008	T	SMT	yes		C0603_L1.6-W0.8-H0.8	0603B222K500NT	2.2nF	62.992,31.496,0,0,0,0,0,0	Basic Part
		1587716	0.0036	T	SMT	yes		C0603_L1.6-W0.8-H0.8	GCM1885C2A221JA16D	220pF	62.992,31.496,0,0,0,0,0,0	Extended Part
		35990	0.0025	T	SMT	yes		CAP-SMD_B D4.0-L4.3-W4.3-FD-LS5.1	RVT1E100M0405_C22383790	10uF	200.787,169.291,0,180,0,0,0,0	Extended Part
		11318	0.016	T	DIP	yes		AUDIO-TH_P J-3200	PJ-3200	PJ-3200	551.18,236.22,0,0,0,0,-63.07,-0.354,-110.236	Extended Part
		2398402	0.0002	T	SMT	yes		R0402_L1.0-W0.5-H0.4	0402WGF5101TCE	5.1kΩ	39.37,19.685,0,0,0,0,0,0	Basic Part
		7821642	0.0004	T	SMT	yes		R0603	0603WAF1000T5E	100Ω	31.8897,63.7794,0,90,0,0,0,0	Basic Part

		1286654	0.0002	T	SMT	yes		R0603	0603WAF15 01T5E	1.5kΩ	31.8897,63.7 794,0,90,0,0, 0,0,0	Basic Part
		1028869	0.0007	T	SMT	yes		R1206_L3.2- W1.6-H0.6	1206W4F100 4T5E	1MΩ	125.984,62.9 92,0,0,0,0,0, 0,0	Basic Part
		1383	0.1452	T	SMT	yes			RS08U111Z0 01	10kΩ		Extended Part
		3123168	0.0002	T	SMT	yes		R0402_L1.0- W0.5-H0.4	0402WGF10 01TCE	1kΩ	39.37,19.685 ,0,0,0,0,0,0,0	Basic Part
		931729	0.0002	T	SMT	yes		R0603	0603WAF68 00T5E	680Ω	31.8897,63.7 794,0,90,0,0, 0,0,0	Basic Part
		1932185	0.0003	T	SMT	yes		R0603	0603WAF47 02T5E	47kΩ	31.8897,63.7 794,0,90,0,0, 0,0,0	Basic Part
		6152575	0.0005	T	SMT	yes		R0805_L2.0- W1.3-H0.6	0805W8F100 1T5E	1kΩ	78.74,51.181 ,0,0,0,0,0,-0. 0005,0	Basic Part
		0	0.0002	T	SMT	yes		R0603	0603WAF10 02T5E	10kΩ	31.8897,63.7 794,0,90,0,0, 0,0,0	Basic Part
		1867128	0.0002	T	SMT	yes		R0402_L1.0- W0.5-H0.4	0402WGF10 02TCE	10kΩ	39.37,19.685 ,0,0,0,0,0,0,0	Basic Part
		337372	0.0004	T	SMT	yes		R0603	0603WAF47 0KT5E	4.7Ω	31.8897,63.7 794,0,90,0,0, 0,0,0	Basic Part
		380853	0.0002	T	SMT	yes		R0402_L1.0- W0.5-H0.4	0402WGF51 02TCE	51kΩ	39.37,19.685 ,0,0,0,0,0,0,0	Basic Part
		50	1.117	T	SMT	yes		SSOP-28_L1 0.2-W5.3-H2. 0-LS7.8-P0.6 5	PCM2704DB	PCM2704DB	401.574,307. 086,0,270,0, 0,0,0,0	Extended Part
		10555	0.107	T	SMT	yes		SOT-23-6_L2 .9-W1.6-H1.5 -LS2.8-P0.95	LM2776DBV R	LM2776DBV R	110.73671,1 14.173,0,180 ,0,0,0.001,-0. 003,0	Extended Part
		2264	0.4587	T	SMT	yes		SOIC-14_L8. 6-W3.9-H1.8- LS6.0-P1.27	OPA1654AID R	OPA1654AID R	338.583,236. 22,0,0,0,0,0, 0.001,0	Extended Part
		1377026	0.011	T	DIP	yes		USB-C-SMD TYPE-C-6PIN N-2MD-073	TYPE-C 16PIN 2MD(073)	TYPE-C 16PIN 2MD(073)	351.9678,29 8.4246,0,0,0, 0,0,-47.244,- 35.433	Extended Part
		225763	0.015	T	SMT	yes		CRYSTAL-S MD_4P-L3.2- W2.5-BL	X322512MS B4SI	12MHz	125.984,98.4 25,0,0,0,0,0, 0,0	Basic Part

Description	sourceId	spicePre
Capacitance:100nF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X7R		
Capacitance:10uF Tolerance:±20% Tolerance:±20% Voltage Rating:25V Temperature Coefficient:X5R		
Capacitance:22pF Tolerance:±5% Tolerance:±5% Voltage Rating:50V Temperature Coefficient:C0G		
Capacitance:1uF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X5R		
Capacitance:470uF Tolerance:±20% Tolerance:±20% Voltage Rating:16V Ripple Current:- Equivalent Series Resistance(ESR):- Diameter:8mm Height - Seated (Max):10.2mm Lifetime:2000hrs@105°C Operating Temperature:-45°C~+105°C Operating Temperature:-45°C~+105°C		
Capacitance:100uF Tolerance:±20% Tolerance:±20% Voltage Rating:35V Ripple Current:- Equivalent Series Resistance(ESR):- Diameter:6.3mm Height - Seated (Max):7.7mm Lifetime:2000hrs@105°C Operating Temperature:-45°C~+105°C Operating Temperature:-45°C~+105°C		
Capacitance:2.2uF Tolerance:±10% Tolerance:±10% Voltage Rating:16V Temperature Coefficient:X5R		
Capacitance:1uF Tolerance:±10% Tolerance:±10% Voltage Rating:25V Temperature Coefficient:X5R		
Capacitance:470nF Tolerance:±10% Tolerance:±10% Voltage Rating:25V Temperature Coefficient:X7R		
Capacitance:47nF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X7R		
Capacitance:22nF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X7R		
Capacitance:2.2nF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X7R		
Capacitance:220pF Tolerance:±5% Tolerance:±5% Voltage Rating:100V Temperature Coefficient:C0G		

Capacitance:10uF Tolerance:±20% Tolerance:±20% Voltage Rating:25V Diameter:4mm Height - Seated (Max):5.4mm Operating Temperature:-55°C~+105°C Operating Temperature:-55°C~+105°C		
Connector Type:3.5mm Headphone Jack Current Rating:500mA Voltage Rating (Max):30V Operating Temperature:-20°C~+70°C Operating Temperature:-20°C~+70°C		
Type:Thick Film Resistor Resistance:5.1kΩ Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Type:Thick Film Resistors Resistance: Tolerance:±1% Tolerance:±1% Power(Watts): Overload Voltage (Max): Temperature Coefficient:±200ppm/°C Temperature Coefficient:±200ppm/°C Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		
Type:Thick Film Resistor Resistance:1.5kΩ Tolerance:±1% Tolerance:±1% Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Type:Thick Film Resistor Resistance:1MΩ Tolerance:±1% Tolerance:±1% Power(Watts):250mW Voltage-Supply(Max):200V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Resistance: Tolerance:±30% Tolerance:±30%		
Type:Thick Film Resistor Resistance:1kΩ Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		

Type:Thick Film Resistors Resistance: Tolerance:±1% Tolerance:±1% Power(Watts): Overload Voltage (Max): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		
Type:Thick Film Resistor Resistance:47kΩ Tolerance:±1% Tolerance:±1% Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Type:Thick Film Resistors Resistance:1kΩ Tolerance:±1% Tolerance:±1% Power(Watts): Overload Voltage (Max): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		
Type:Thick Film Resistor Resistance:10kΩ Tolerance:±1% Tolerance:±1% Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Type:Thick Film Resistor Resistance:10kΩ Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Type:Thick Film Resistor Resistance:4.7Ω Tolerance:±1% Tolerance:±1% Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:±400ppm/°C Temperature Coefficient:±400ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Type:Thick Film Resistors Resistance:51kΩ Tolerance:±1% Tolerance:±1% Power(Watts): Overload Voltage (Max): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		

Resolution:16 Number of Channels:2 Voltage - Supply:3V~5.25V Voltage - Supply:3V~5.25V Interface Type:I2S Operating Temperature:-25°C~+85°C Operating Temperature:-25°C~+85°C		
Operating Voltage:2.7V~5.5V Operating Voltage:2.7V~5.5V Quiescent Current:200uA Output Resistance:2.5Ω Energy Efficiency:90% Switching Frequency:2MHz Operating Temperature:-40°C~+85°C Operating Temperature:-40°C~+85°C Function:Inverted PFM Mode:Support Output		
Class:- Speaker Channels:4-Channel Output Power:- Total Harmonic Distortion + Noise (THD+N):0.00005% Quiescent Current:2mA Signal-to-Noise Ratio:- Power Supply Rejection Ratio (PSRR):110dB Efficiency:- Number of Inputs:- Features:- Voltage - Supply:2.25V~		
Connector Type:Type-C Protocol Standard:- Gender:Female Mounting Type:Surface Mount, Right Angle Number of Contacts:16P Number of Ports:1 Current Rating-Power:3A Voltage Rating:5V Connect-Disconnect Life:10,000 Cycles Supplementary Features:- Center Heigh		
Type:Crystal Oscillator Frequency:12MHz Normal temperature Frequency Tolerance:±10ppm Normal temperature Frequency Tolerance:±10ppm Load Capacitance:20pF Frequency Stability:±20ppm Frequency Stability:±20ppm Operating Temperature:-40°C~+85°C Operating Tempe		

EQSB (Equalizer USB)

Nächhiappan T.

L

R

Bass

Mid

Treble

239

0 0



JuiceWorld



0 0 0 0 0

