Connect Smart Boad via Wi-Fi 📶
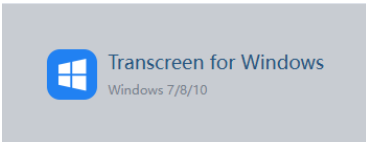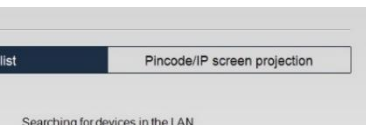
| 1 | | **Turn on** ⏻ the Smart Board. Select **ScreenMirror.** |

| 2 | | Connect device to Wi-Fi network. SSID: |

| 3 | | Open a web browser and search *sb.sample.com:000 1* |

| 4 | Transscreen for Windows Windows 7/8/10 | Download and open **Transcreen** software according to your device's OS. |

| 5 | Pincode/IP screen projection Searching for devices in the LAN | Click on **IP screen projection**. |

| 6 | | Enter IP Address **192.168.001.001** Click on **Start projection.** |