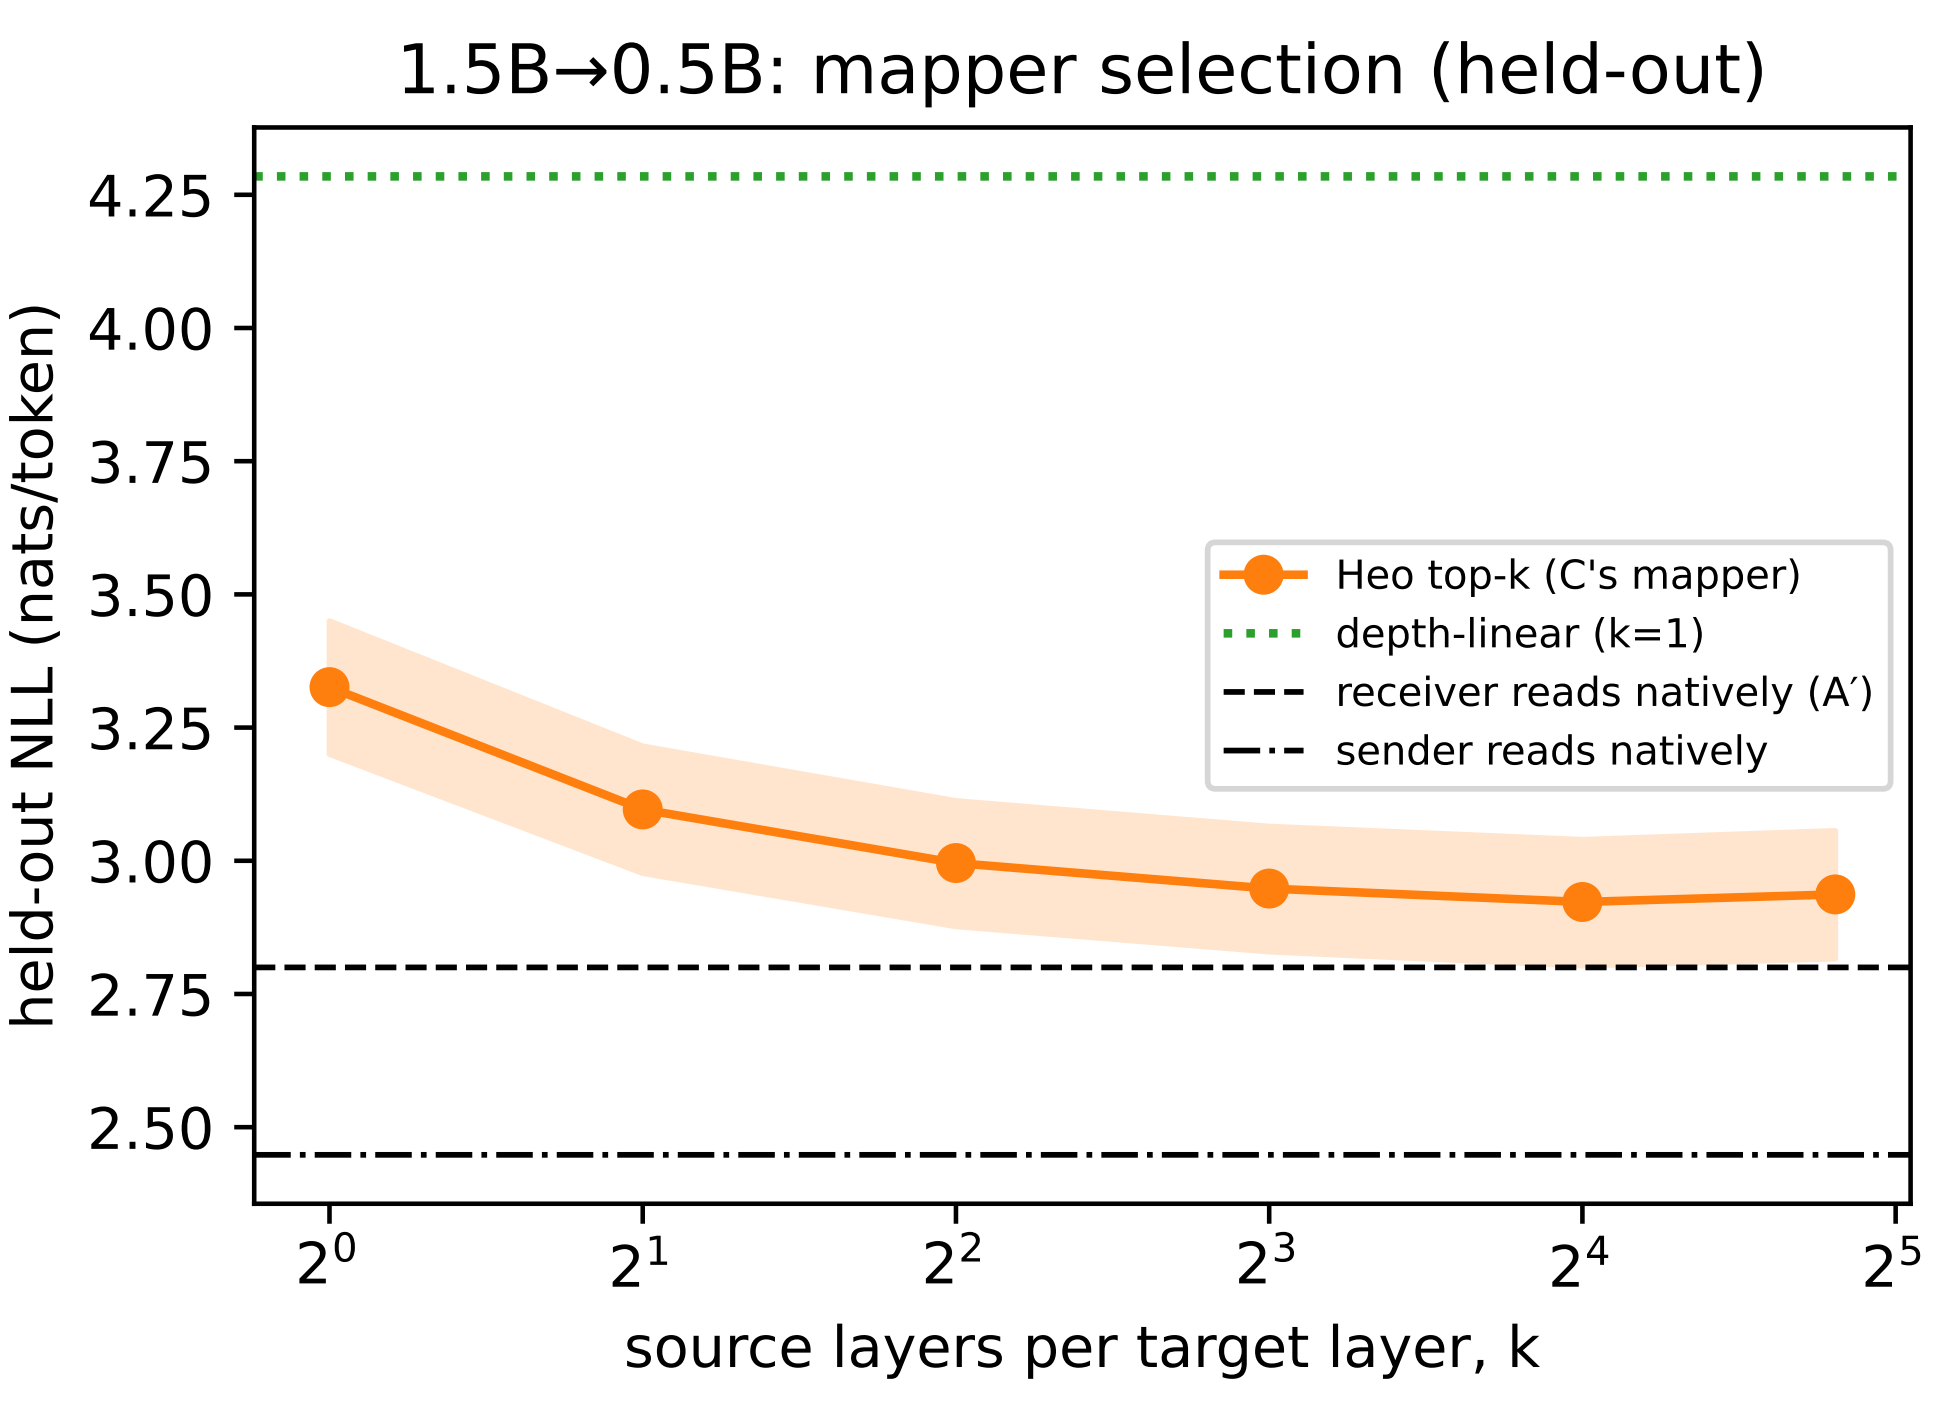
1.5B→0.5B: mapper selection (held-out)
held-out NLL (nats/token)
4.25
4.00
3.75
3.50
3.25
3.00
2.75
2.50
$2^0$
$2^1$
$2^2$
$2^3$
$2^4$
$2^5$
source layers per target layer, k
Heo top-k (C's mapper)
depth-linear (k=1)
receiver reads natively (A′)
sender reads natively