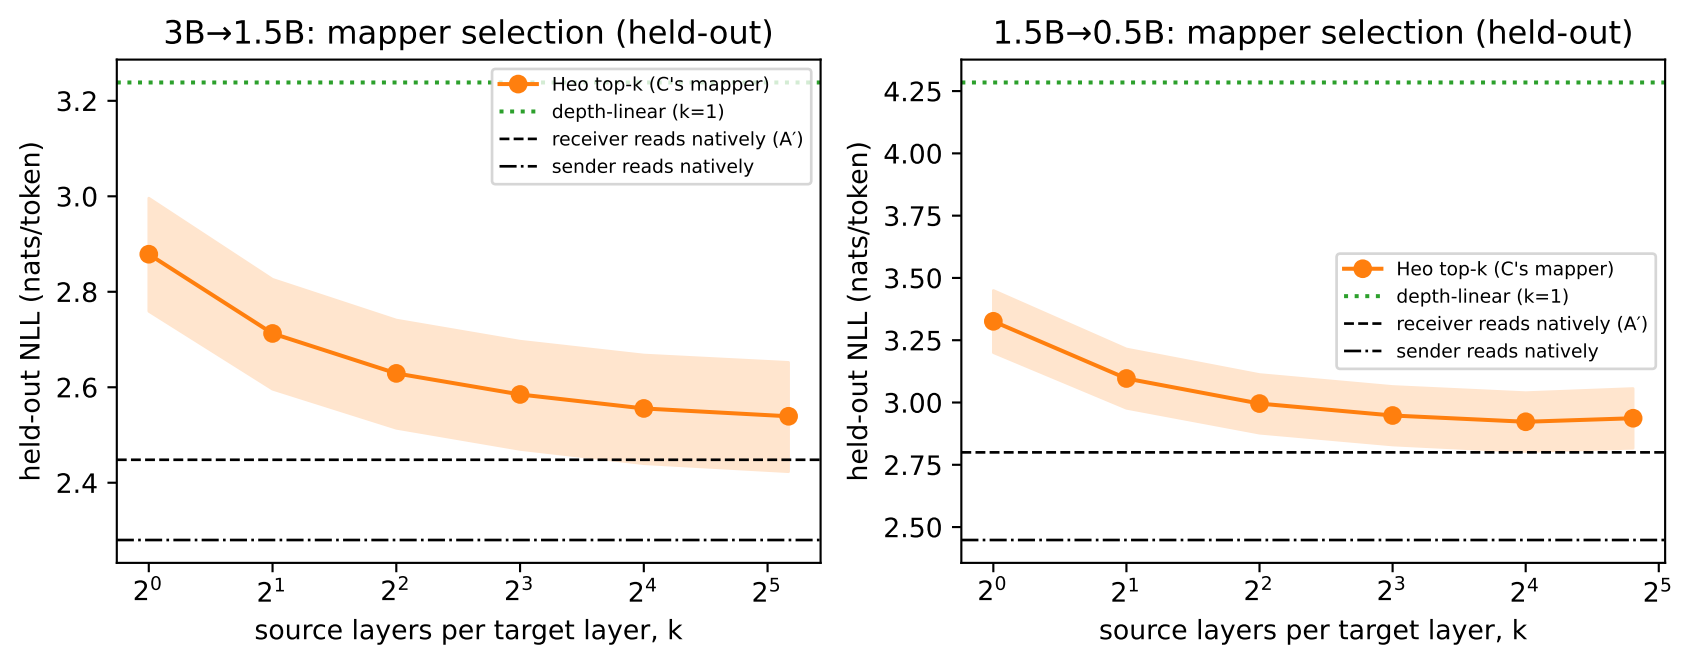
3B→1.5B: mapper selection (held-out)
held-out NLL (nats/token)
3.2
3.0
2.8
2.6
2.4
Heo top-k (C's mapper)
depth-linear (k=1)
receiver reads natively (A′)
sender reads natively
2^0
2^1
2^2
2^3
2^4
2^5
source layers per target layer, k
1.5B→0.5B: mapper selection (held-out)
held-out NLL (nats/token)
4.25
4.00
3.75
3.50
3.25
3.00
2.75
2.50
Heo top-k (C's mapper)
depth-linear (k=1)
receiver reads natively (A′)
sender reads natively
2^0
2^1
2^2
2^3
2^4
2^5
source layers per target layer, k