



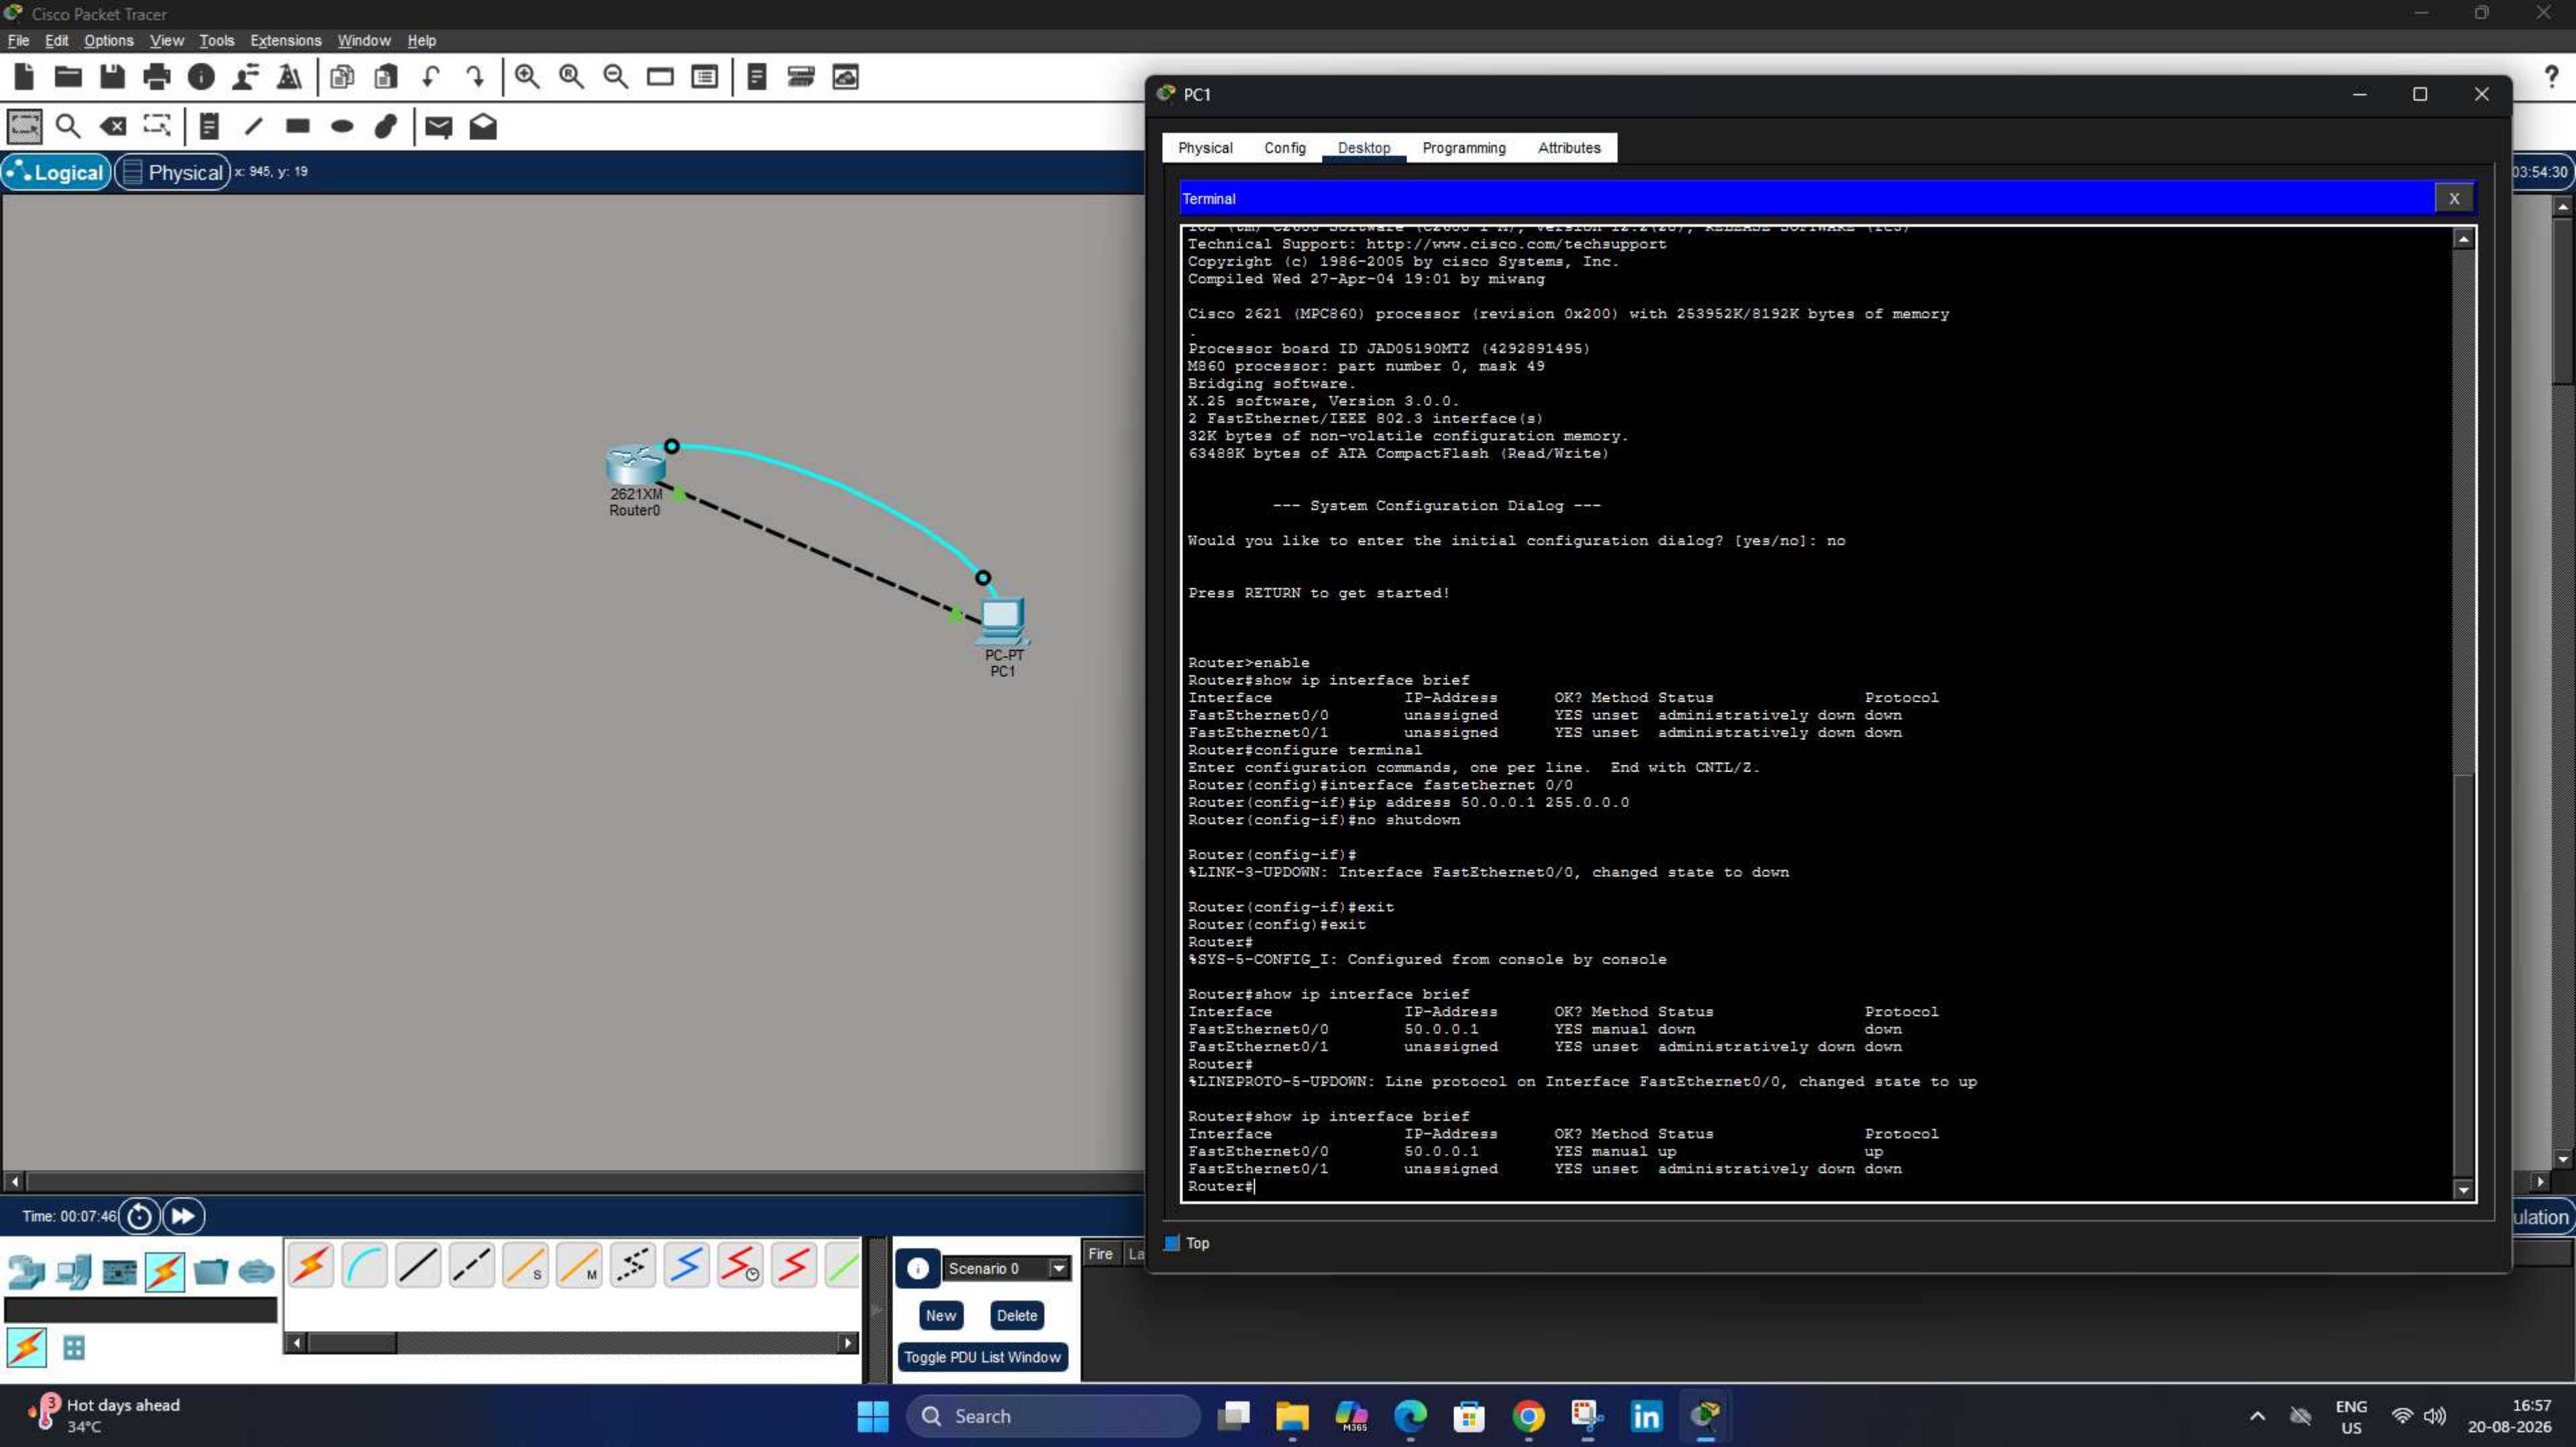

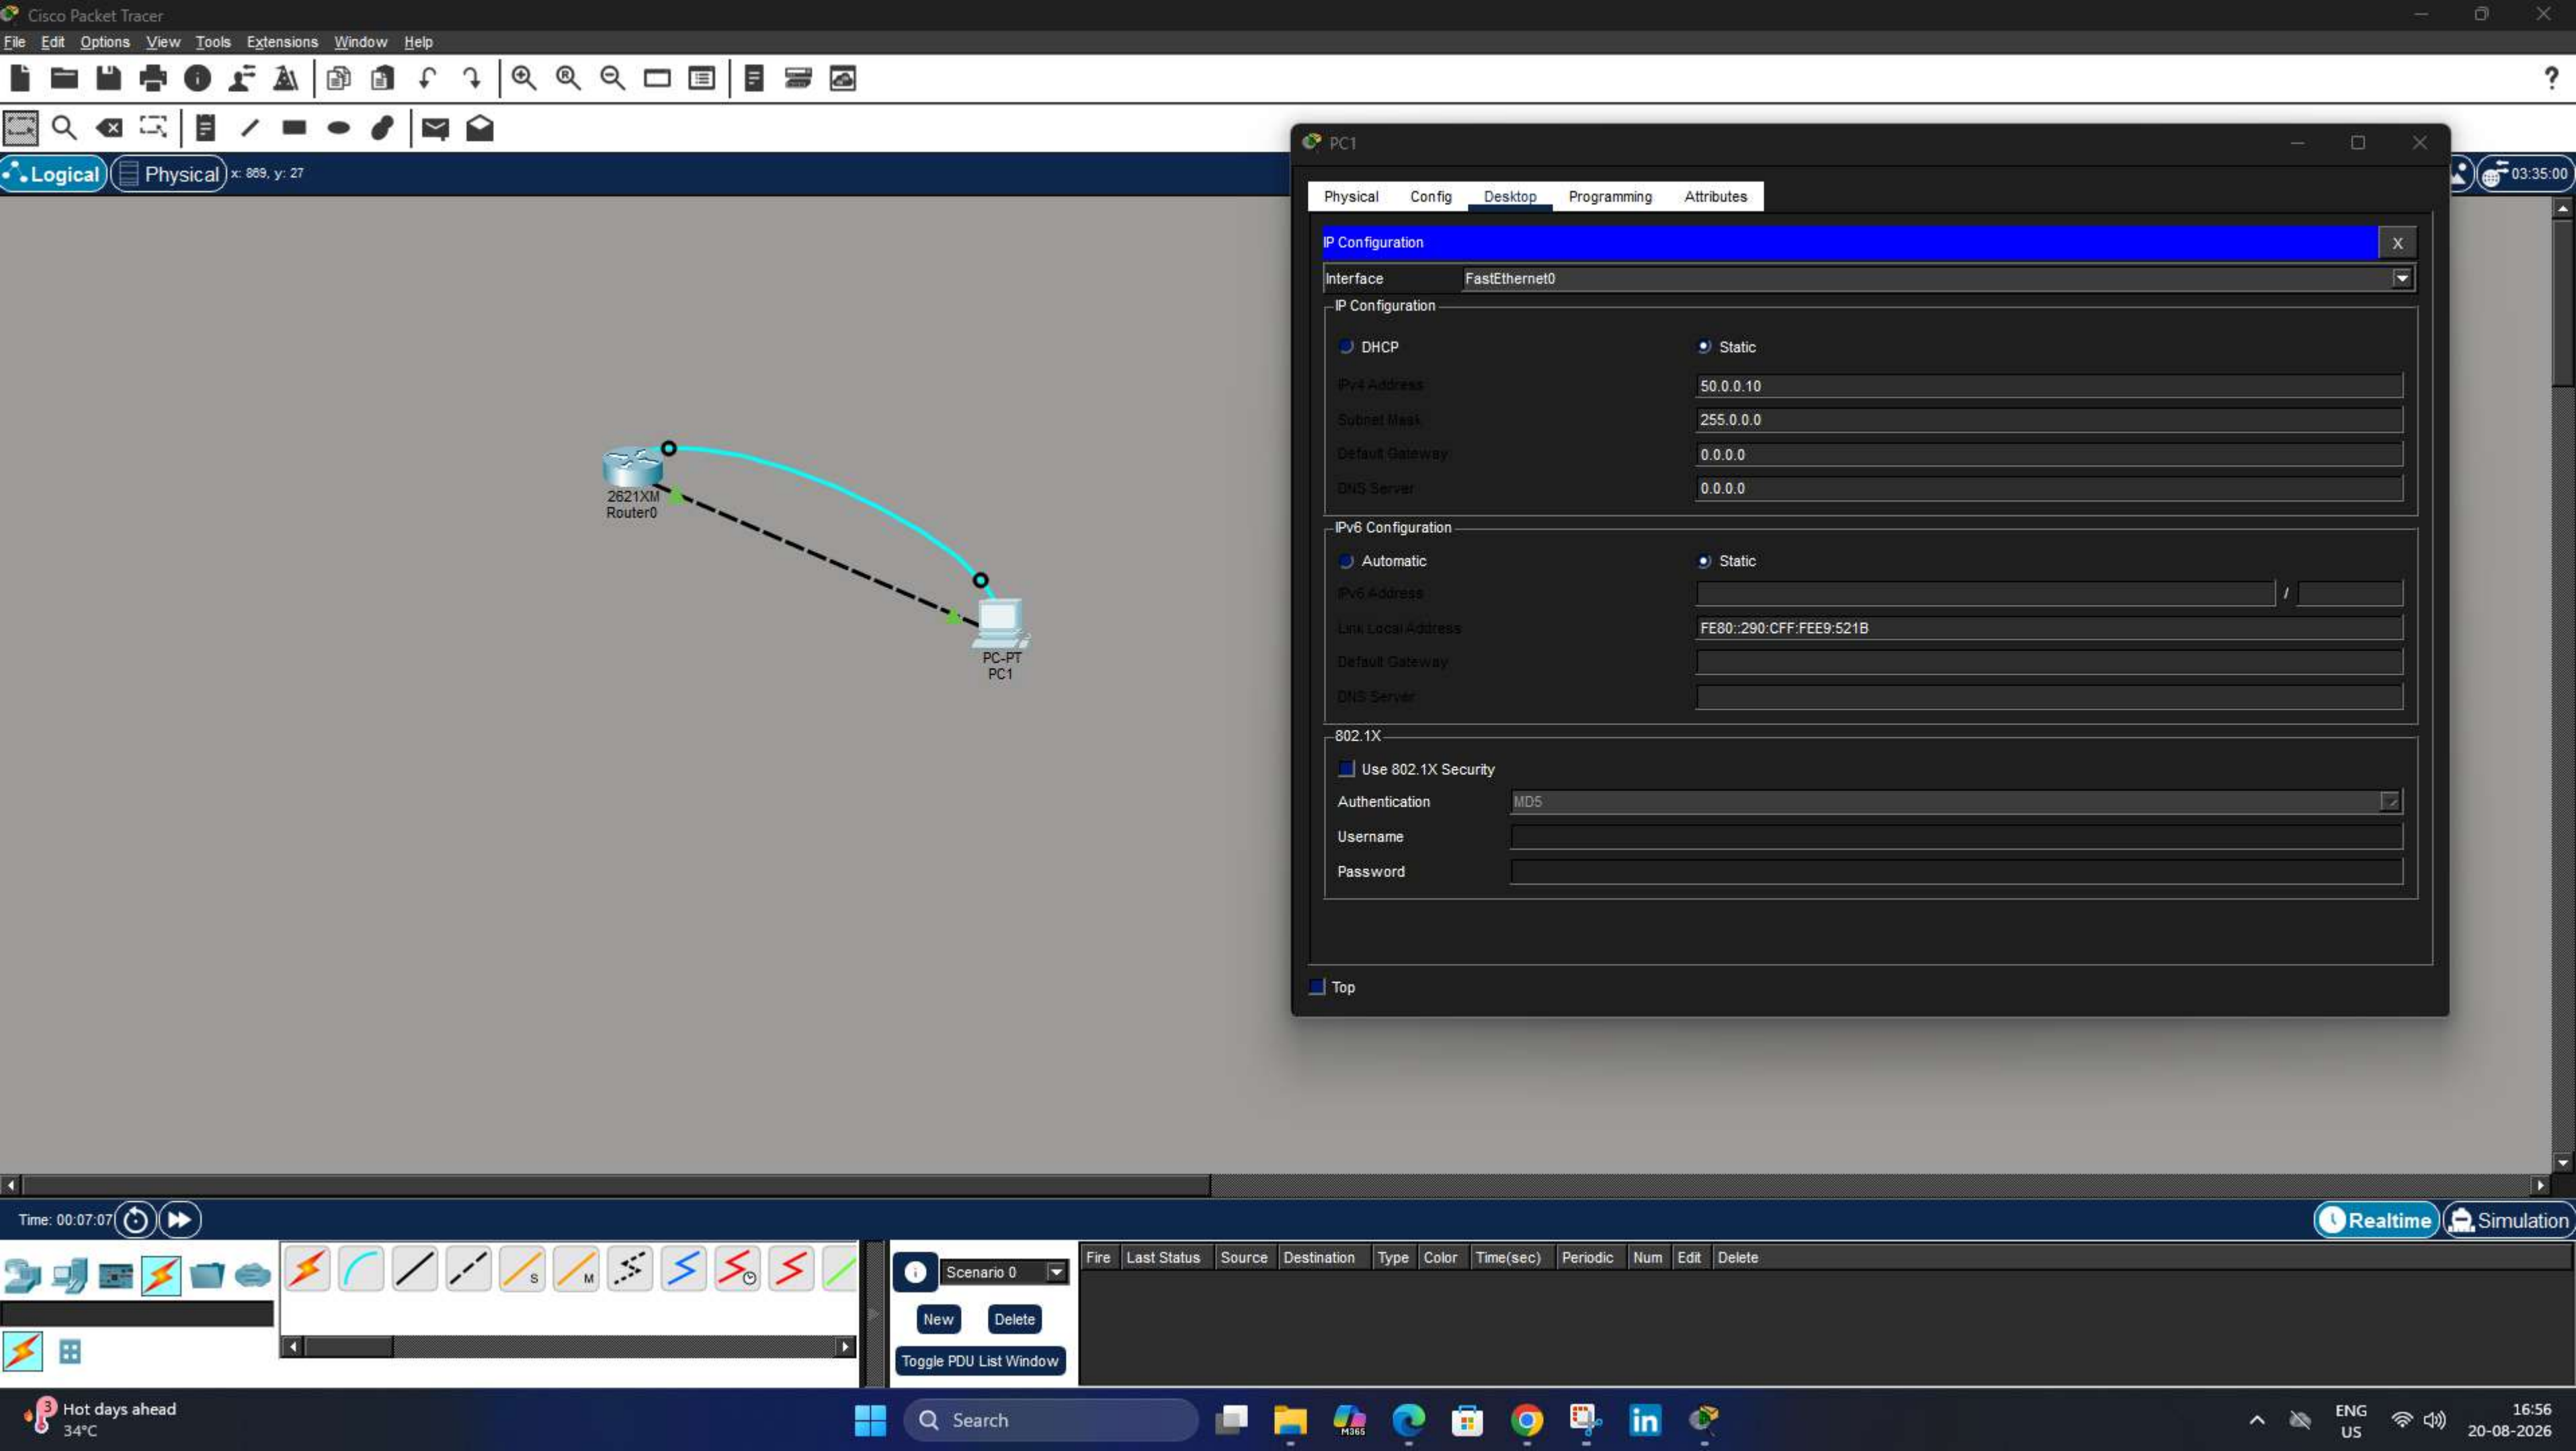

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1100, y: 716

2621XM Router0

PC-PT PC1

Time: 00:09:49

Scenario 0

New Delete

Toggle PDU List Window

PC1

Physical Config Desktop Programming Attributes

Terminal

```
2 FastEthernet/IEEE 802.3 interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#show ip interface brief
Interface          IP-Address      OK? Method Status              Protocol
FastEthernet0/0    unassigned      YES unset   administratively down down
FastEthernet0/1    unassigned      YES unset   administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastethernet 0/0
Router(config-if)#ip address 50.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-UPDOWN: Interface FastEthernet0/0, changed state to down

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface          IP-Address      OK? Method Status              Protocol
FastEthernet0/0    50.0.0.1        YES manual down              down
FastEthernet0/1    unassigned      YES unset   administratively down down
Router#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router#show ip interface brief
Interface          IP-Address      OK? Method Status              Protocol
FastEthernet0/0    50.0.0.1        YES manual up              up
FastEthernet0/1    unassigned      YES unset   administratively down down
Router#ping 50.0.0.10



Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 50.0.0.10, timeout is 2 seconds:
.....
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/2 ms


Router#ping 50.0.0.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 50.0.0.10, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#username nagaraj password nagaraj
Router(config)#line console 0
Router(config-line)#password nagaraj
Router(config-line)#login local
Router(config-line)#exit
Router(config)#
```

Top

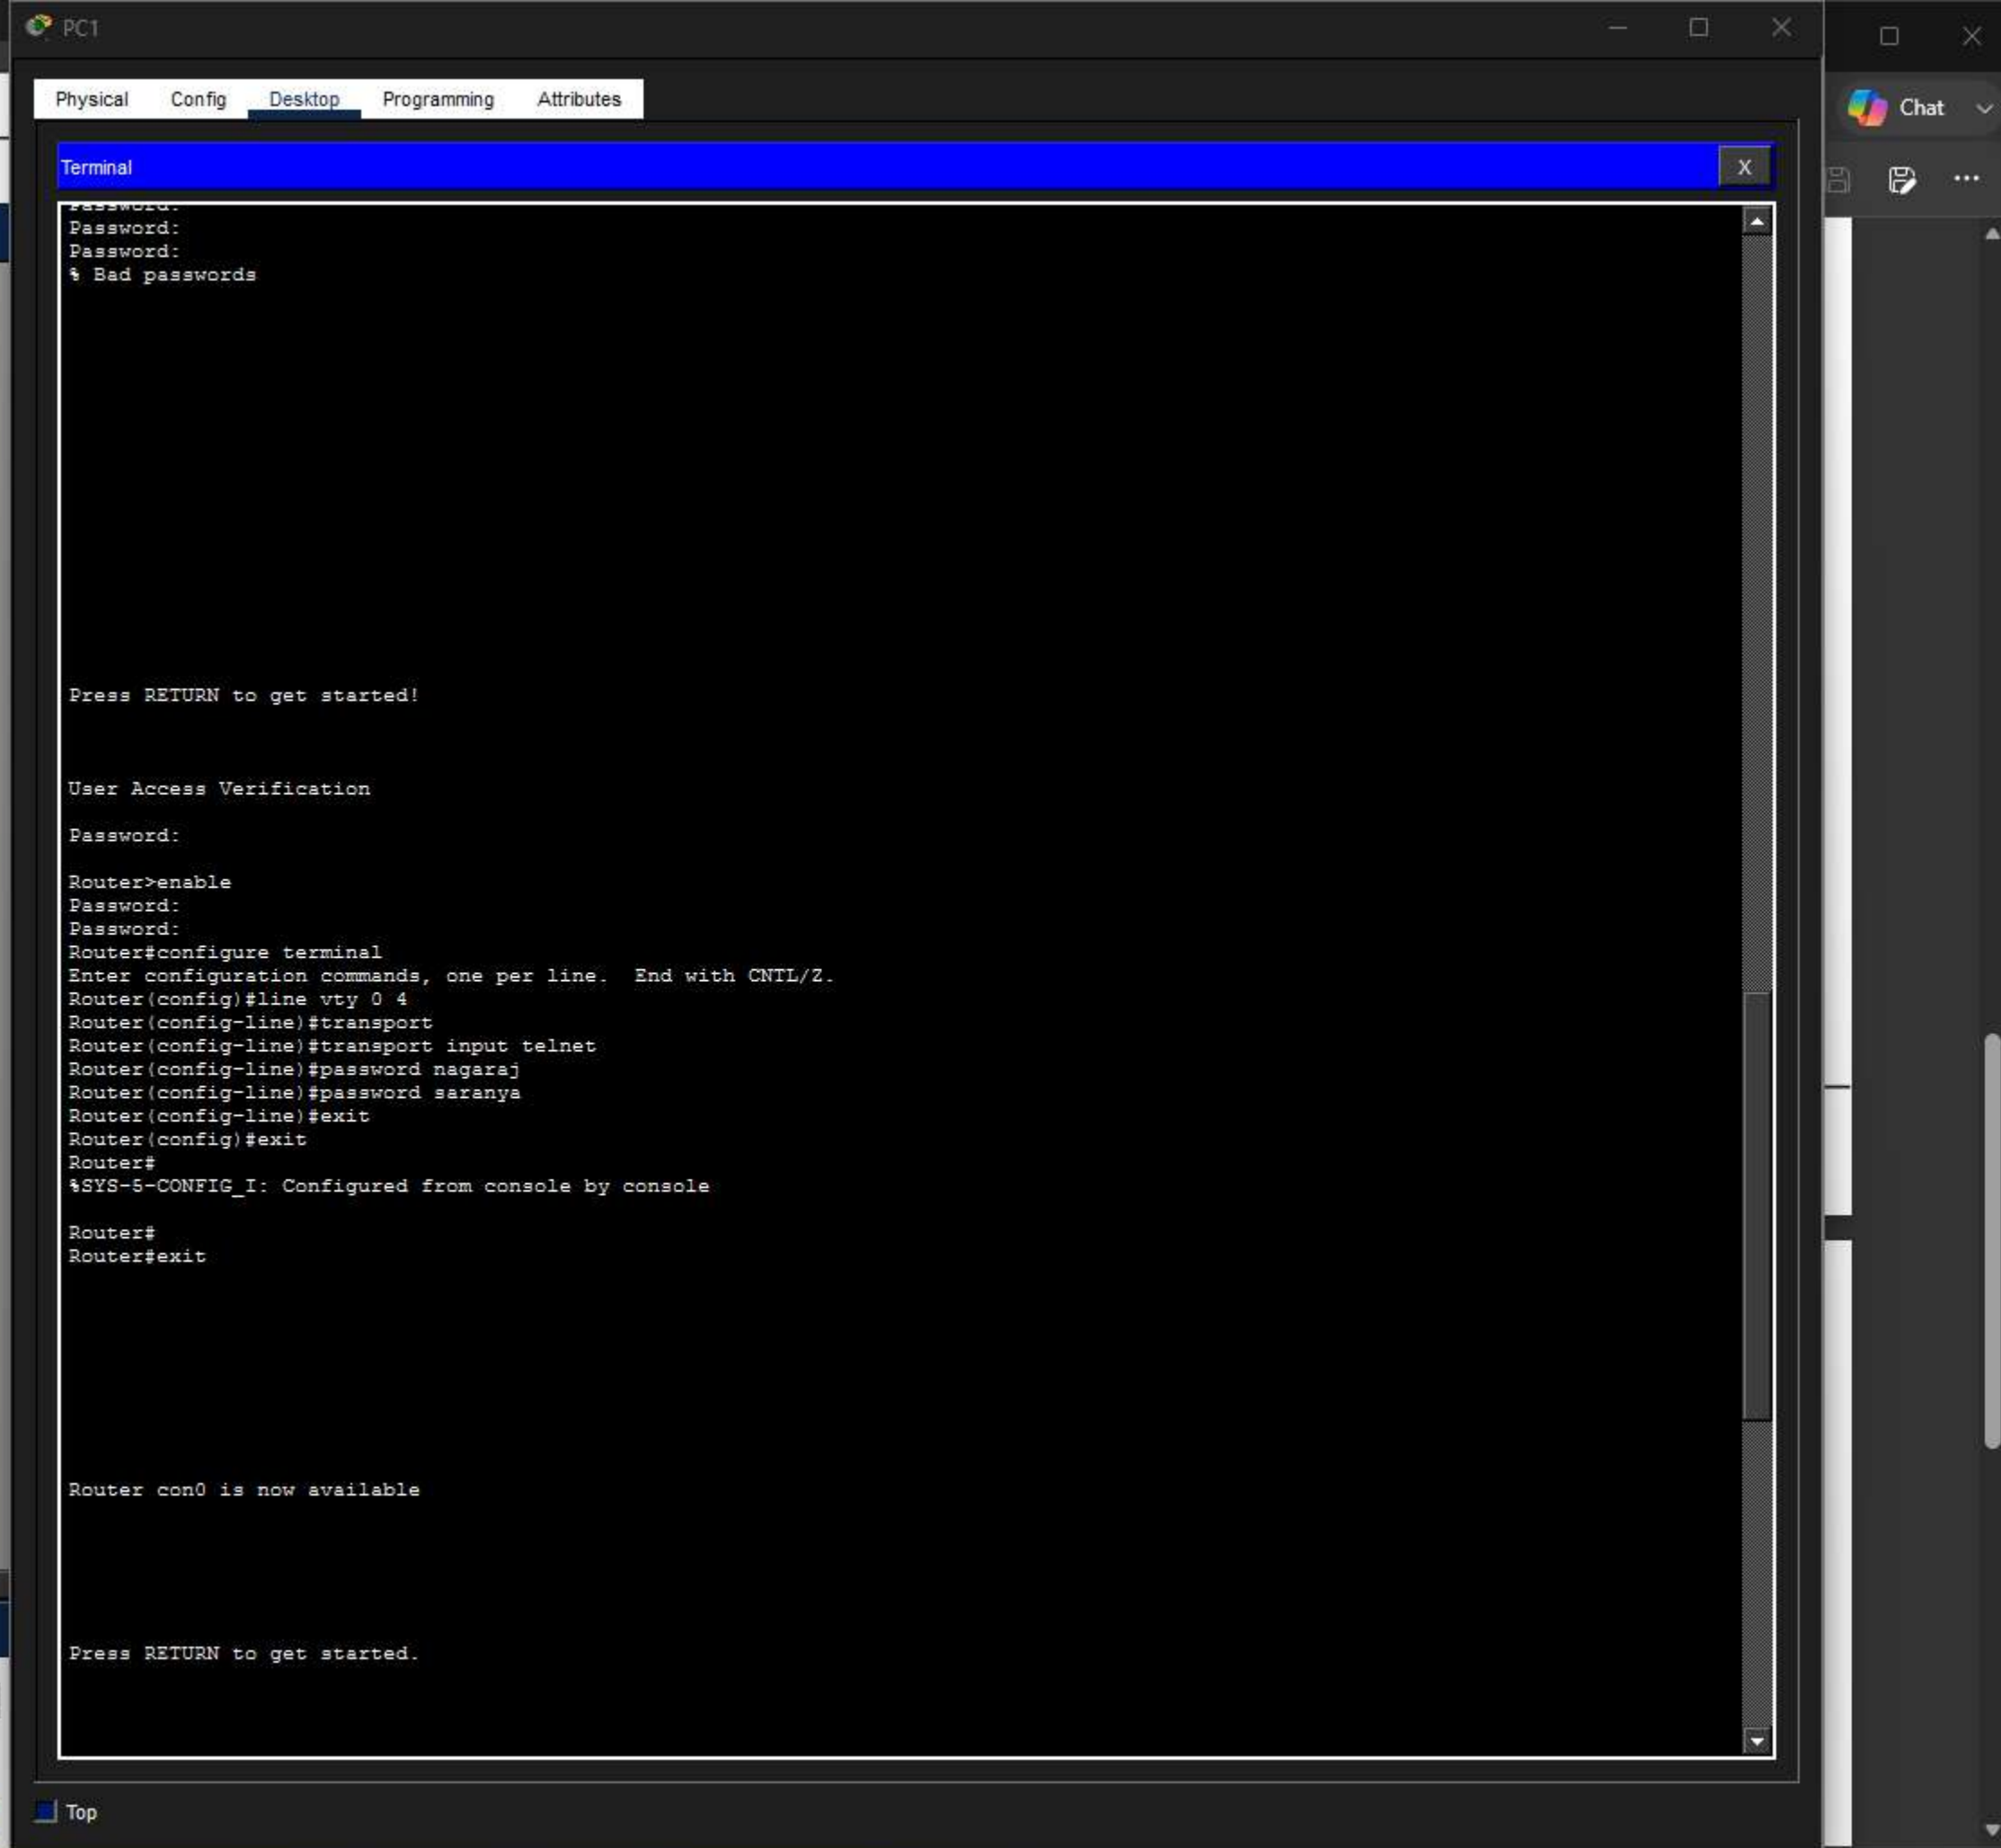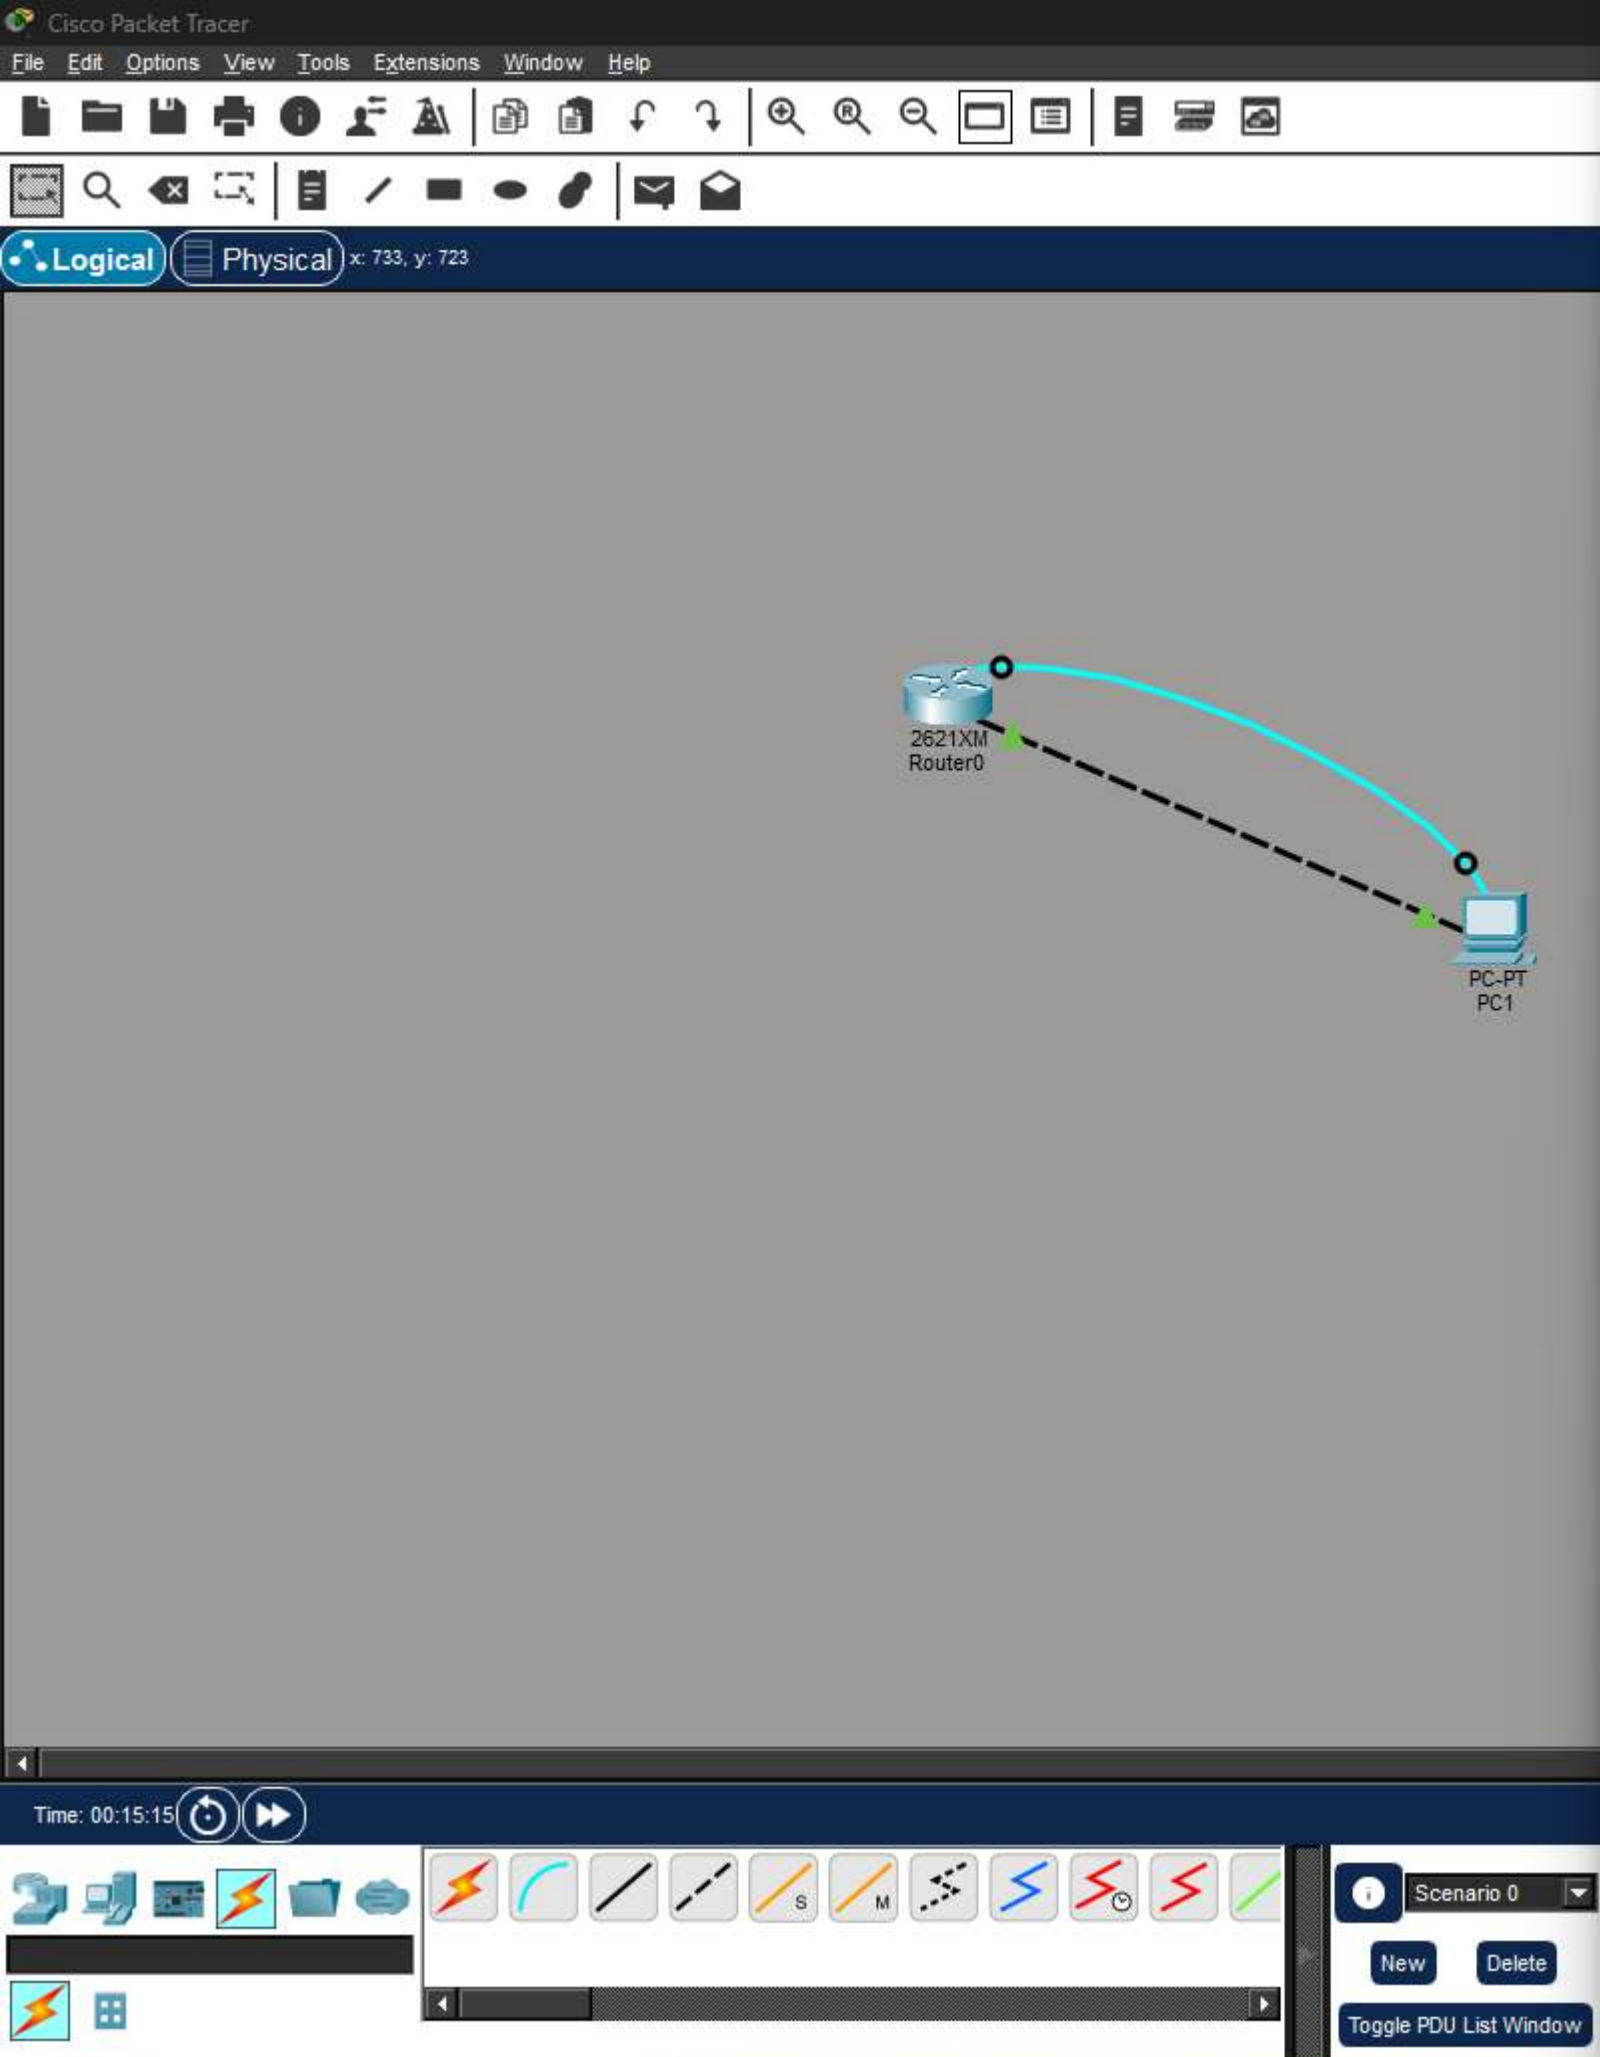

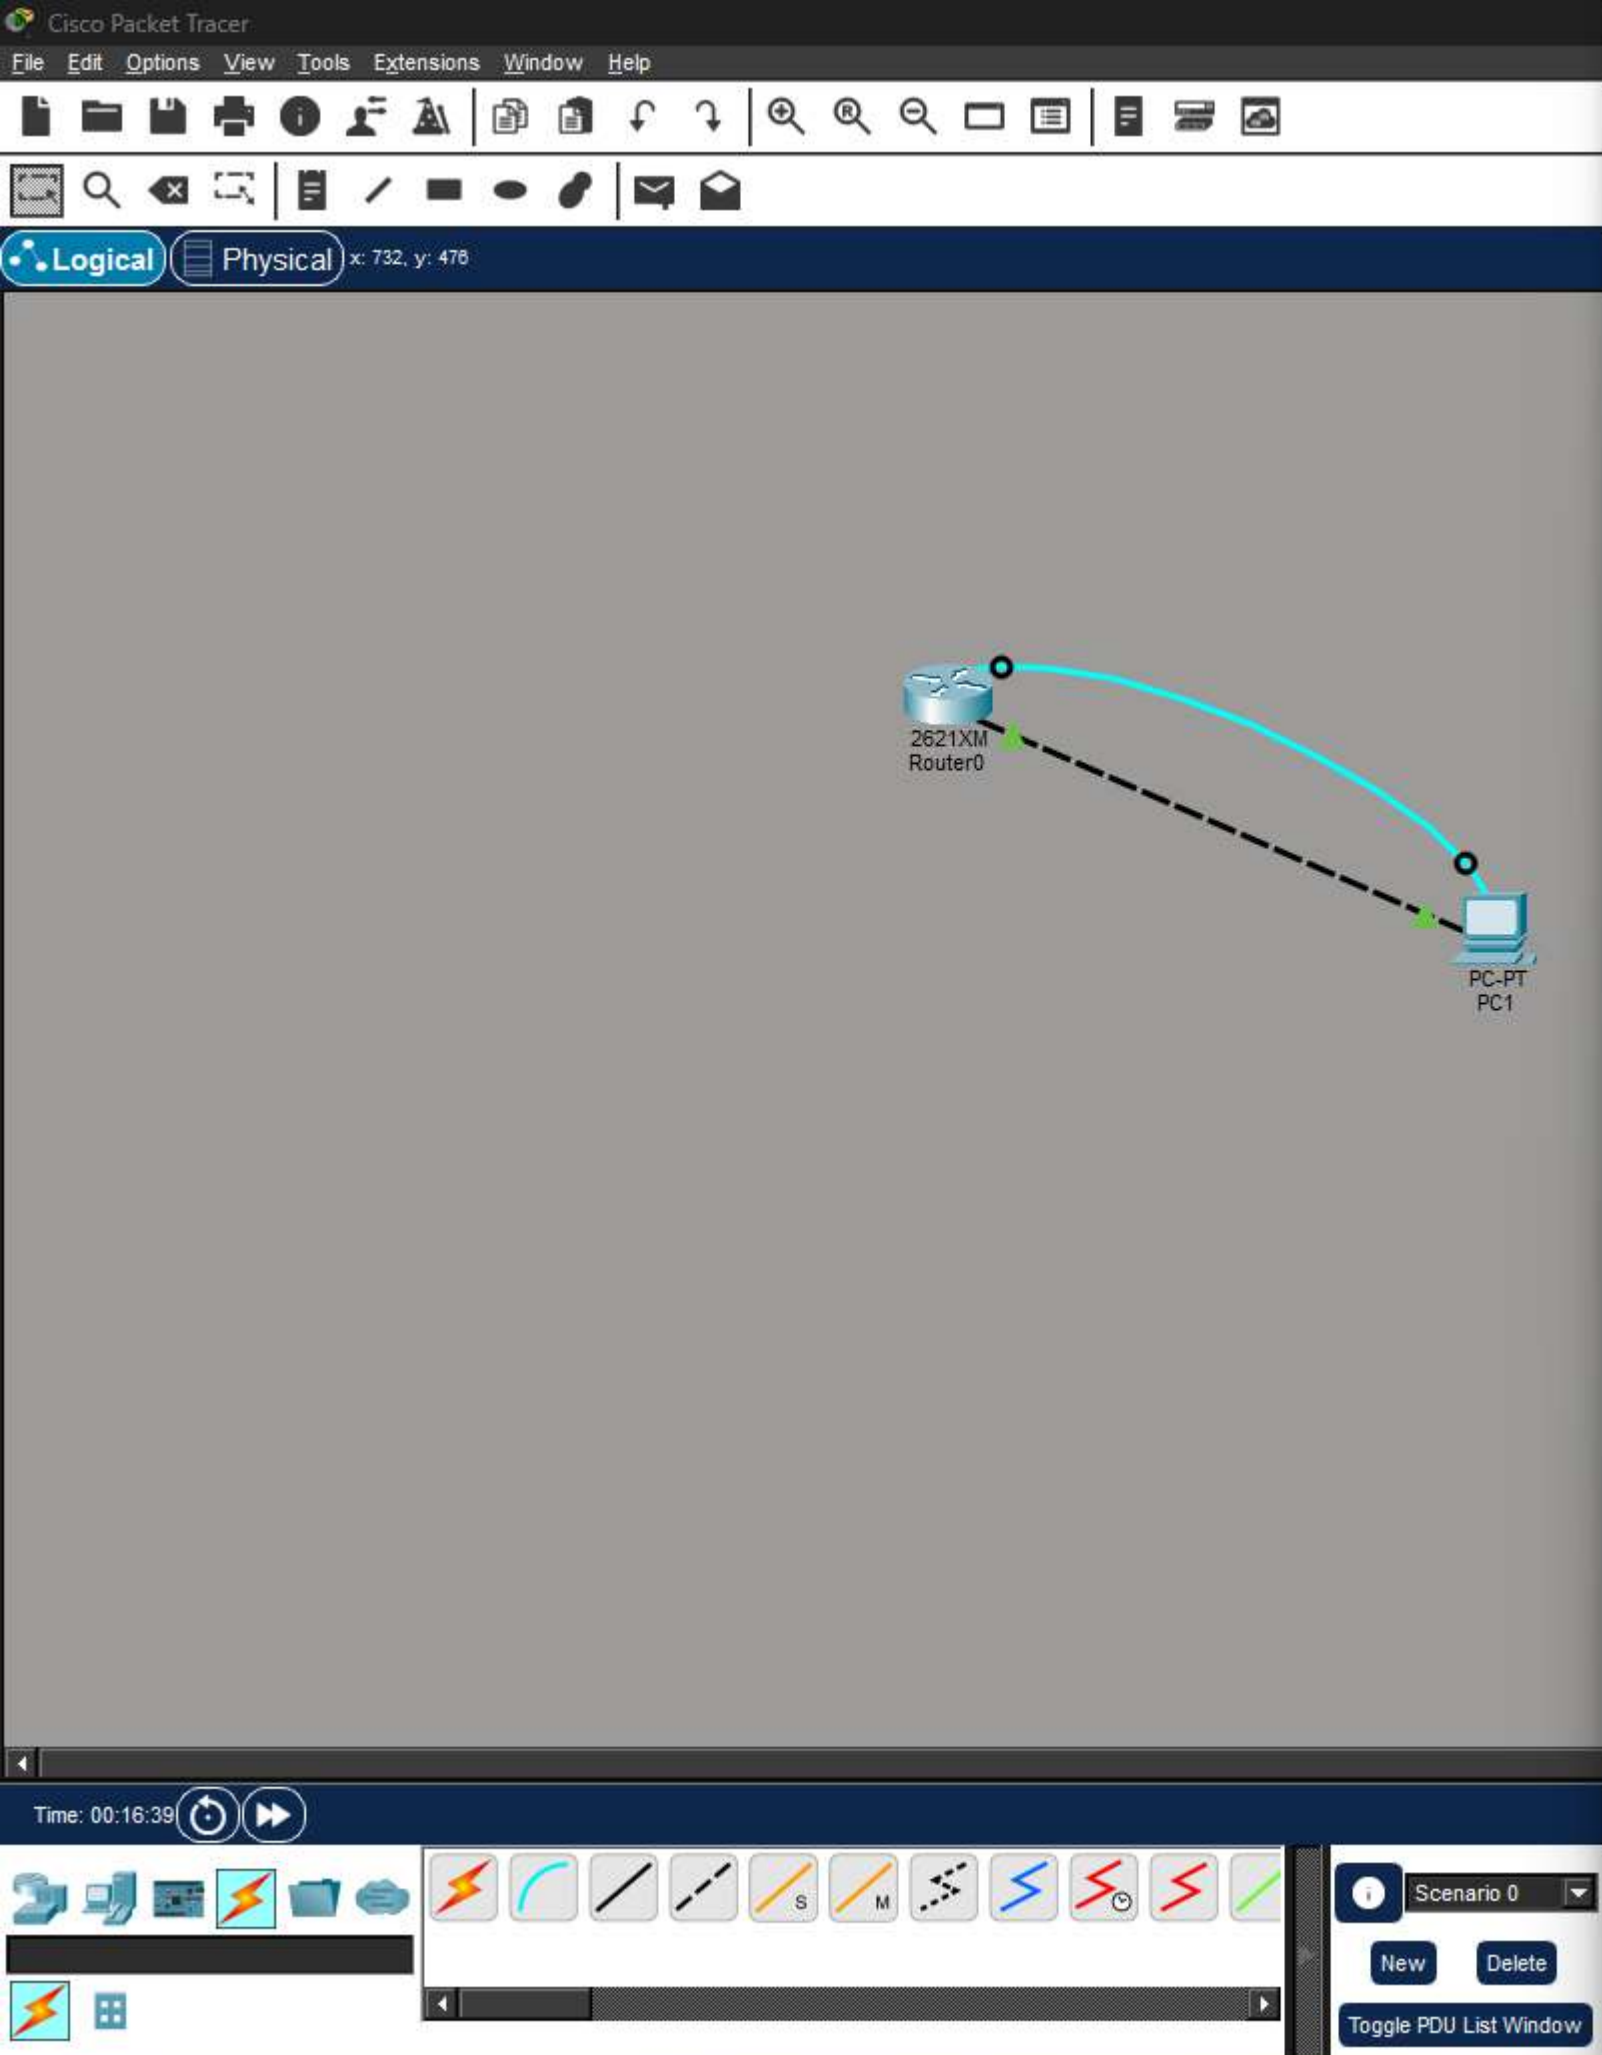

PC1

Physical Config Desktop Programming Attributes

SSH Client

```
Trying 50.0.0.1 ...Open
```

User Access Verification

```
Password:
Password:
Router>enable
Password:
Router#show ip interface brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
FastEthernet0/0	50.0.0.1	YES	manual	up	up
FastEthernet0/1	unassigned	YES	unset	administratively down	down

Router#

Top

Chat

3 34°C Mostly sunny

Search

ENG US

17:06 20-08-2026