


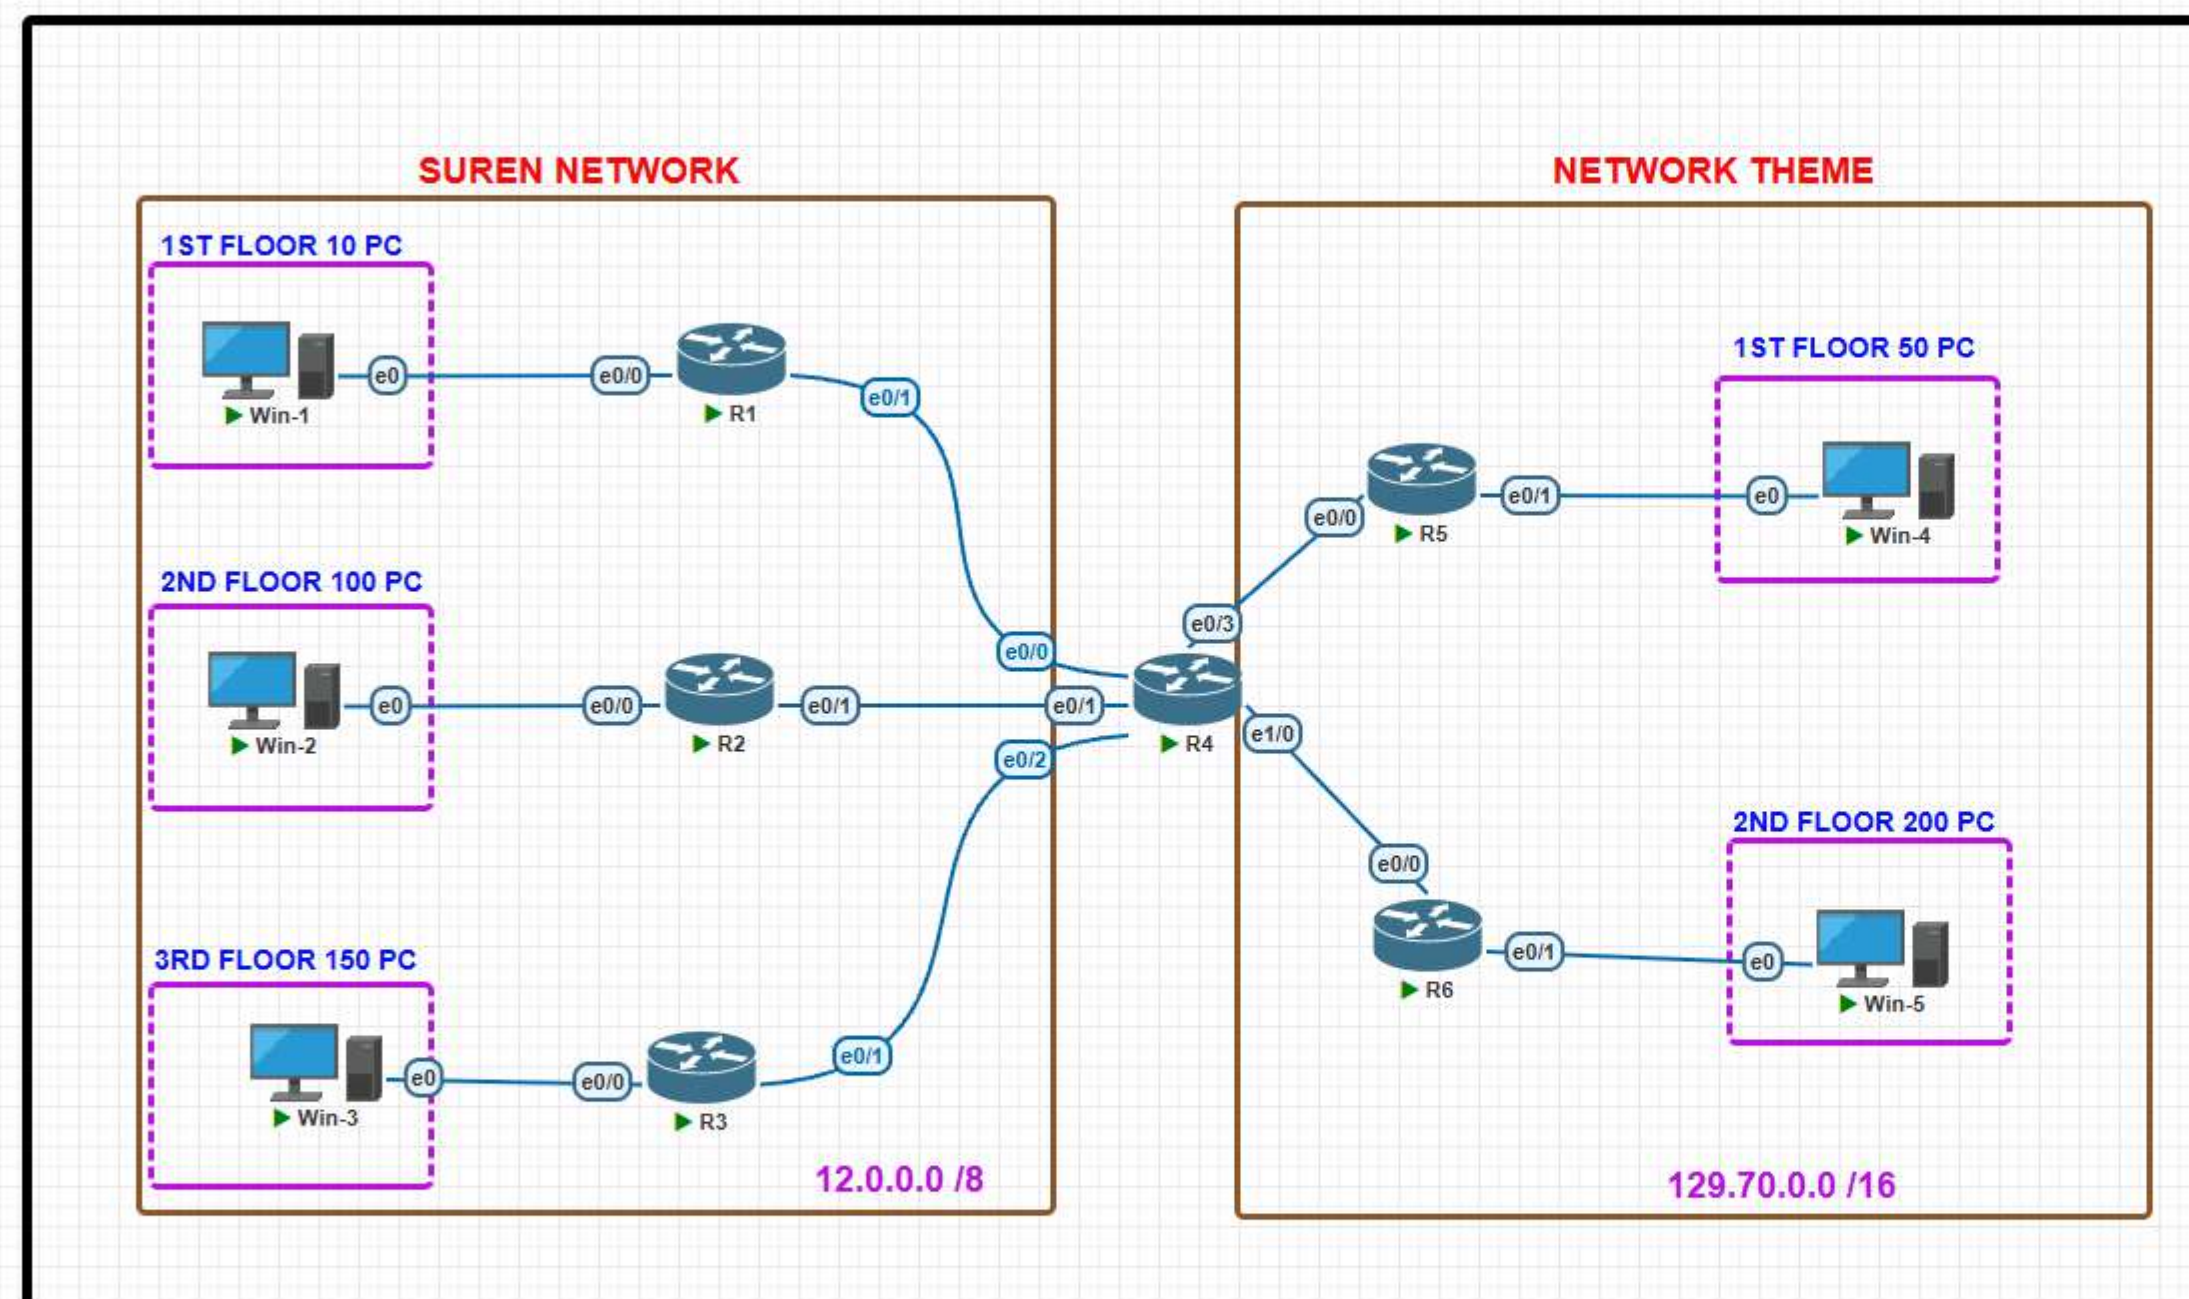

QEMU (Win-1)

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address. : 12.0.1.130
Subnet Mask : 255.255.255.240
Default Gateway : 12.0.1.129

C:\Documents and Settings\user>ping 129.70.0.2

Pinging 129.70.0.2 with 32 bytes of data:

Reply from 129.70.0.2: bytes=32 time=1ms TTL=125
Reply from 129.70.0.2: bytes=32 time=2ms TTL=125
Reply from 129.70.0.2: bytes=32 time=2ms TTL=125
Reply from 129.70.0.2: bytes=32 time=2ms TTL=125

Ping statistics for 129.70.0.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>

QEMU (Win-2)

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address. : 12.0.1.2
Subnet Mask : 255.255.255.128
Default Gateway : 12.0.1.1

C:\Documents and Settings\user>ping 12.0.1.149

Pinging 12.0.1.149 with 32 bytes of data:

Reply from 12.0.1.149: bytes=32 time=1ms TTL=255
Reply from 12.0.1.149: bytes=32 time<1ms TTL=255
Reply from 12.0.1.149: bytes=32 time=1ms TTL=255
Reply from 12.0.1.149: bytes=32 time<1ms TTL=255

Ping statistics for 12.0.1.149:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\user>

QEMU (Win-3)

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address. : 12.0.0.2
Subnet Mask : 255.255.255.0
Default Gateway : 12.0.0.1

C:\Documents and Settings\user>ping 129.70.0.2

Pinging 129.70.0.2 with 32 bytes of data:

Reply from 129.70.0.2: bytes=32 time=3ms TTL=125
Reply from 129.70.0.2: bytes=32 time=2ms TTL=125
Reply from 129.70.0.2: bytes=32 time=2ms TTL=125
Reply from 129.70.0.2: bytes=32 time=2ms TTL=125

Ping statistics for 129.70.0.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>

QEMU (Win-4)

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address. : 129.70.1.2
Subnet Mask : 255.255.255.192
Default Gateway : 129.70.1.1

C:\Documents and Settings\user>ping 12.0.0.2

Pinging 12.0.0.2 with 32 bytes of data:

Reply from 12.0.0.2: bytes=32 time=2ms TTL=125
Reply from 12.0.0.2: bytes=32 time=2ms TTL=125
Reply from 12.0.0.2: bytes=32 time=2ms TTL=125
Reply from 12.0.0.2: bytes=32 time=3ms TTL=125

Ping statistics for 12.0.0.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>

QEMU (Win-5)

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address. : 129.70.0.2
Subnet Mask : 255.255.255.0
Default Gateway : 129.70.0.1

C:\Documents and Settings\user>ping 12.0.1.130

Pinging 12.0.1.130 with 32 bytes of data:

Reply from 12.0.1.130: bytes=32 time=1ms TTL=125
Reply from 12.0.1.130: bytes=32 time=1ms TTL=125
Reply from 12.0.1.130: bytes=32 time=2ms TTL=125
Reply from 12.0.1.130: bytes=32 time=1ms TTL=125

Ping statistics for 12.0.1.130:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>

2ND FLOOR 100 PC

Win-2

Win-5

129.70.0.0 /16

Physical

01 : 00 : 00

START

28°C Clear

Search

15-09-2026 00:15