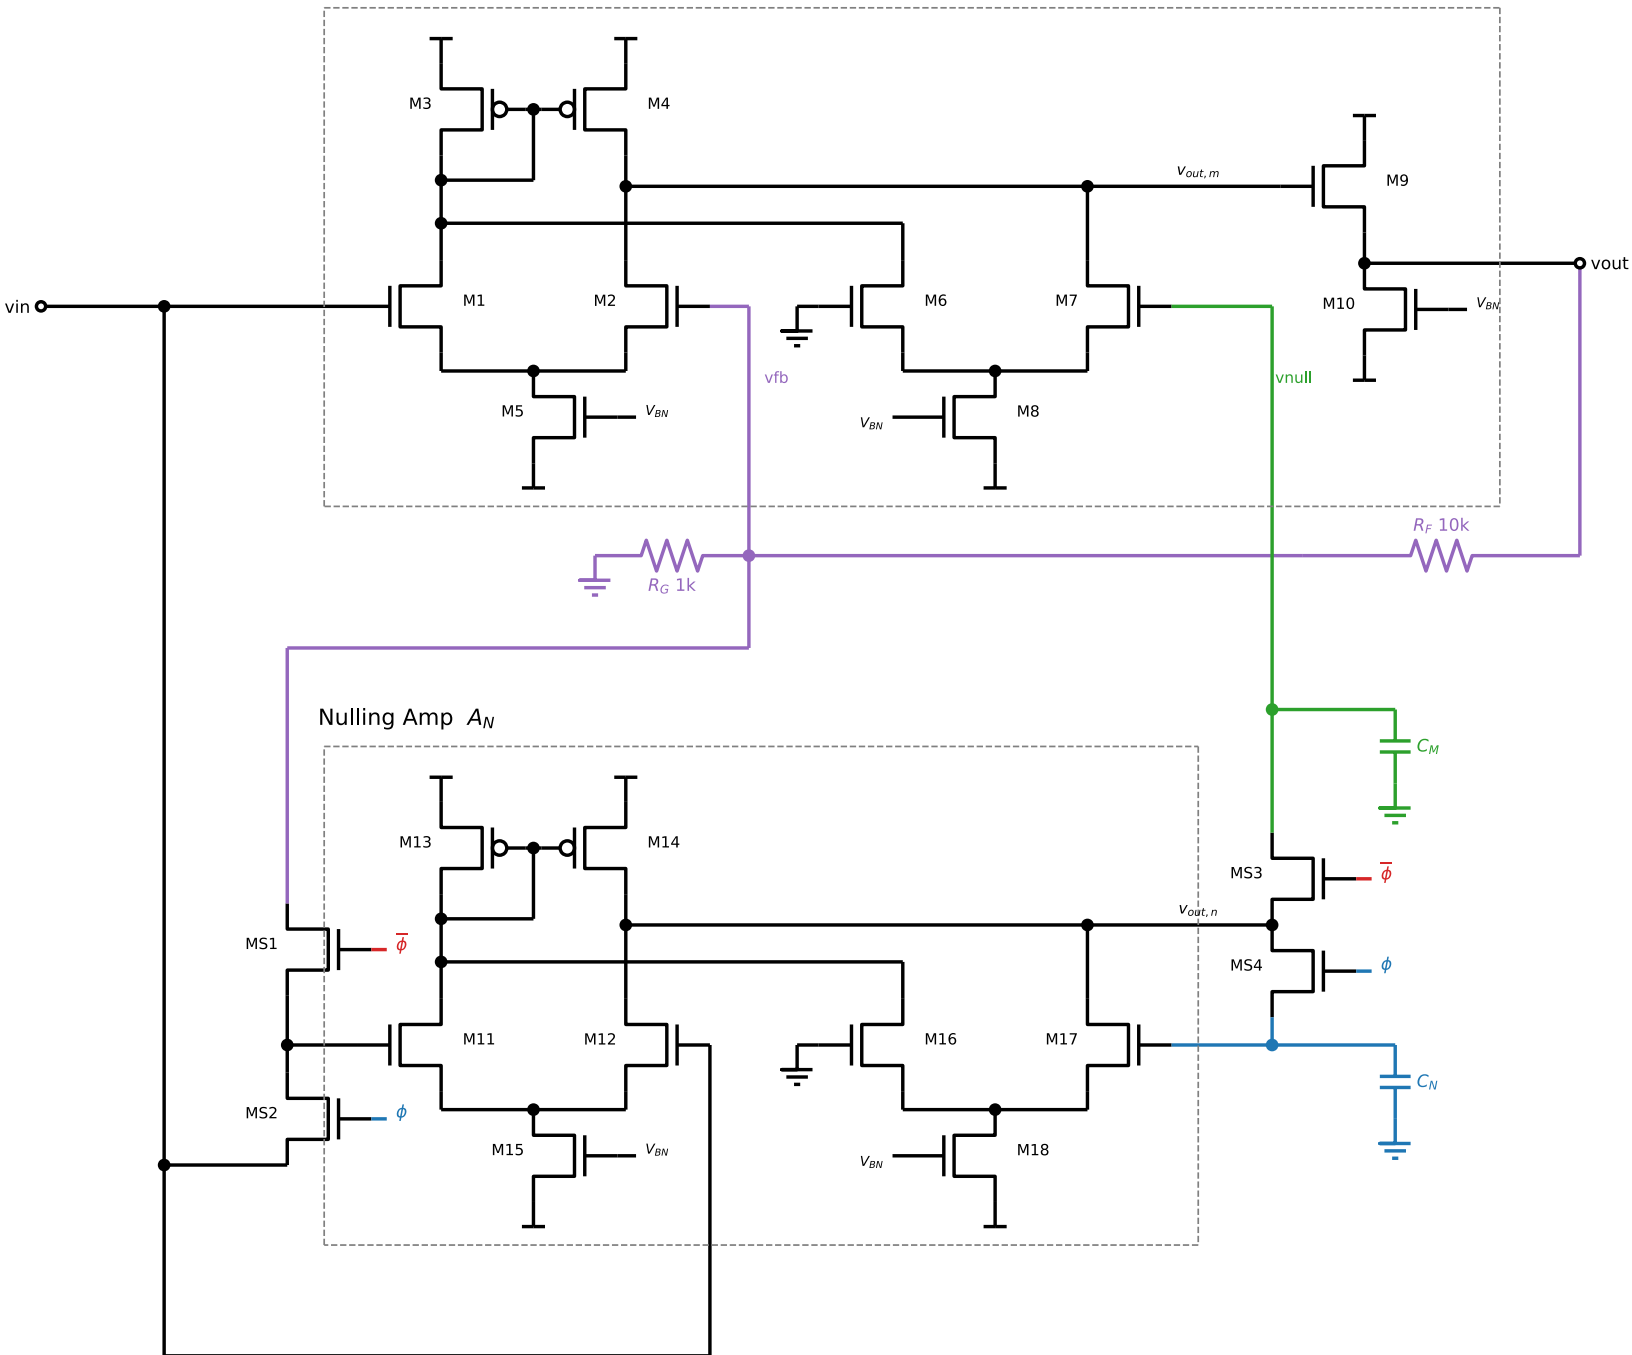


Main Amp A_M 

$\phi = H$: Phase A (auto-zero) MS2, MS4 ON $\rightarrow C_N < -V_{OSN}$

$\bar{\phi} = H$: Phase B (nulling) MS1, MS3 ON $\rightarrow C_M < -V_{OSM}$

Top bar: $+V_{DD}$, bottom bar: $-V_{SS}$, GND: signal ground, V_{BN} : tail bias

V_{OSM} , V_{OSN} = mismatch of M1/M2 (M3/M4), M11/M12 (M13/M14)