

STANDARD ARRIVAL CHART-INSTRUMENT


RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1B ARRIVAL
AROSA 2B ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

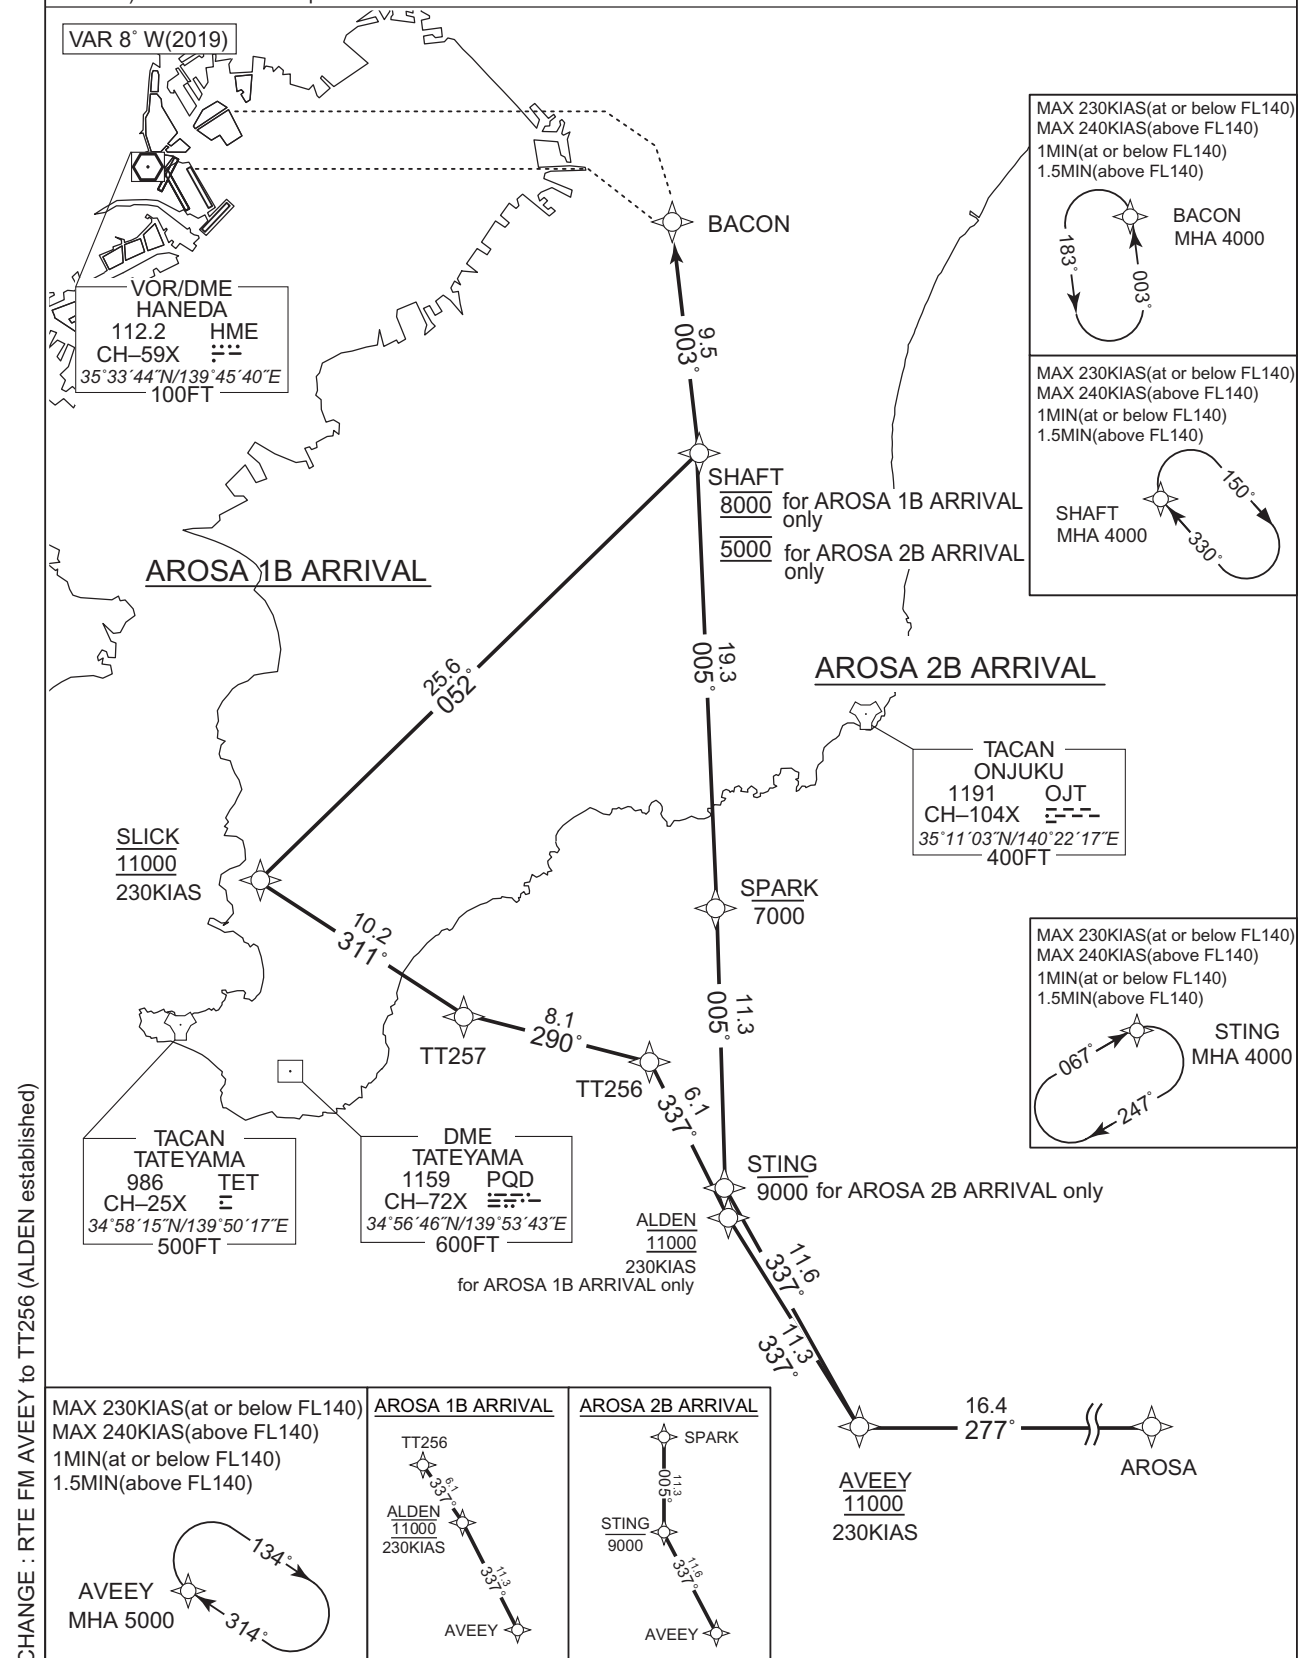

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1B ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 8000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	277 (269.8)	-7.5	16.4	—	11000	230	—	RNAV1
003	TF	ALDEN	—	337 (330.0)	-7.5	11.3	—	11000	230	—	RNAV1
004	TF	TT256	—	337 (329.9)	-7.5	6.1	—	—	—	—	RNAV1
005	TF	TT257	—	290 (282.4)	-7.5	8.1	—	—	—	—	RNAV1
006	TF	SLICK	—	311 (303.1)	-7.5	10.2	—	11000	230	—	RNAV1
007	TF	SHAFT	—	052 (044.3)	-7.5	25.6	—	8000	—	—	RNAV1
008	TF	BACON	—	003 (355.2)	-7.5	9.5	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : RTE FM AVEEY to TT256 (ALDEN established). HLDG pattern at STING deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 2B ARRIVAL

From AROSA, to AVEEY at 11000FT, to STING at or below 9000FT , to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	277 (269.8)	-7.5	16.4	—	11000	230	—	RNAV1
003	TF	STING	—	337 (330.0)	-7.5	11.6	—	-9000	—	—	RNAV1
004	TF	SPARK	—	005 (357.4)	-7.5	11.3	—	-7000	—	—	RNAV1
005	TF	SHAFT	—	005 (357.4)	-7.5	19.3	—	5000	—	—	RNAV1
006	TF	BACON	—	003 (355.2)	-7.5	9.5	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SLICK	350412.7N / 1395120.0E
AROSA	344201.7N / 1404157.3E	SPARK	350312.0N / 1401416.7E
AVEEY	344155.9N / 1402158.0E	STING	345157.9N / 1401453.4E
BACON	353155.0N / 1401215.1E	TT256	345655.4N / 1401122.9E
SHAFT	352227.4N / 1401313.3E	TT257	345838.5N / 1400146.6E

CHANGE : ALDEN established