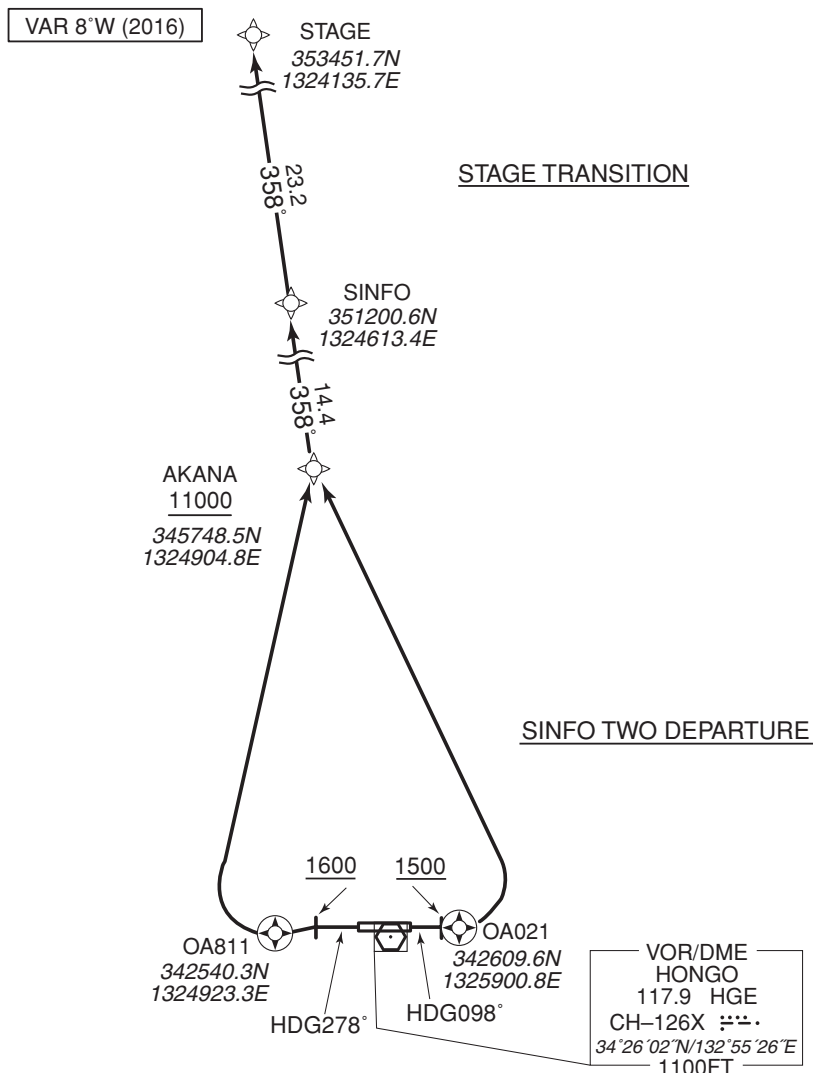


STANDARD DEPARTURE CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

SINFO TWO DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	MYE : OA021 ~ 31NM to AKANA TRE : SINFO ~ STAGE
	DME GAP	RWY10 : DER – OA021 RWY28 : DER – 2NM to OA811
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

SINFO TWO DEPARTURE

RWY10 : Climb on HDG098° at or above 1500FT, direct to OA021, turn left direct to AKANA at or above 11000FT, to SINFO.

RWY28 : Climb on HDG278° at or above 1600FT, direct to OA811, turn right direct to AKANA at or above 11000FT, to SINFO.

NOTE RWY10 : 5.0% climb gradient required up to 1800FT.

OBST ALT 1780FT located at 2.30NM 006° FM end of RWY10.

RWY28 : 3.8% climb gradient required up to 3700FT.

OBST ALT 3150FT located at 11.02NM 322° FM end of RWY28.

STAGE TRANSITION

From SINFO, to STAGE.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

SINFO TWO DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-7.6	—	—	+1500	—	—	RNAV1
002	DF	OA021	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	AKANA	—	—	-7.6	—	L	+11000	—	—	RNAV1
004	TF	SINFO	—	358 (350.7)	-7.6	14.4	—	—	—	—	RNAV1

RWY28

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-7.6	—	—	+1600	—	—	RNAV1
002	DF	OA811	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	AKANA	—	—	-7.6	—	R	+11000	—	—	RNAV1
004	TF	SINFO	—	358 (350.7)	-7.6	14.4	—	—	—	—	RNAV1

STAGE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SINFO	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	STAGE	—	358 (350.6)	-7.6	23.2	—	—	—	—	RNAV1