

## INSTRUMENT APPROACH CHART

RODN / KADENA

APCH CRS	Rwy Idg	12,101
056°	TDZE	93
	Arpt Elev	143

RNAV(GPS) RWY05L

**T** \* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile,  
CAT CDE vis to 1 3/8 miles.  
\*\* Circling NW of Rwy 05L-23R not authorized

ALSF-1



MISSED APPROACH: Climbing right turn to 6000 direct BYYRD  
and hold. Continue climb-in-hold to 6000.


ATIS★ 124.2 280.5	NAHA APP CON/DEP CON 119.1 335.8 NORTHWEST 126.5 258.3 SOUTHEAST	TOWER 134.1 315.8	GND CON CTL 118.5 275.8	CLNC DEL 123.3 235.0	ASR
----------------------	------------------------------------------------------------------------	----------------------	----------------------------	-------------------------	-----

DME/DME RNP - 0.3 NA


RNP APCH

RADAR required for holding  
at ADYEK above 10,000  
when W174 is active.

RADAR required for holding  
at BYYRD above 10,000  
when W178/178A is active.

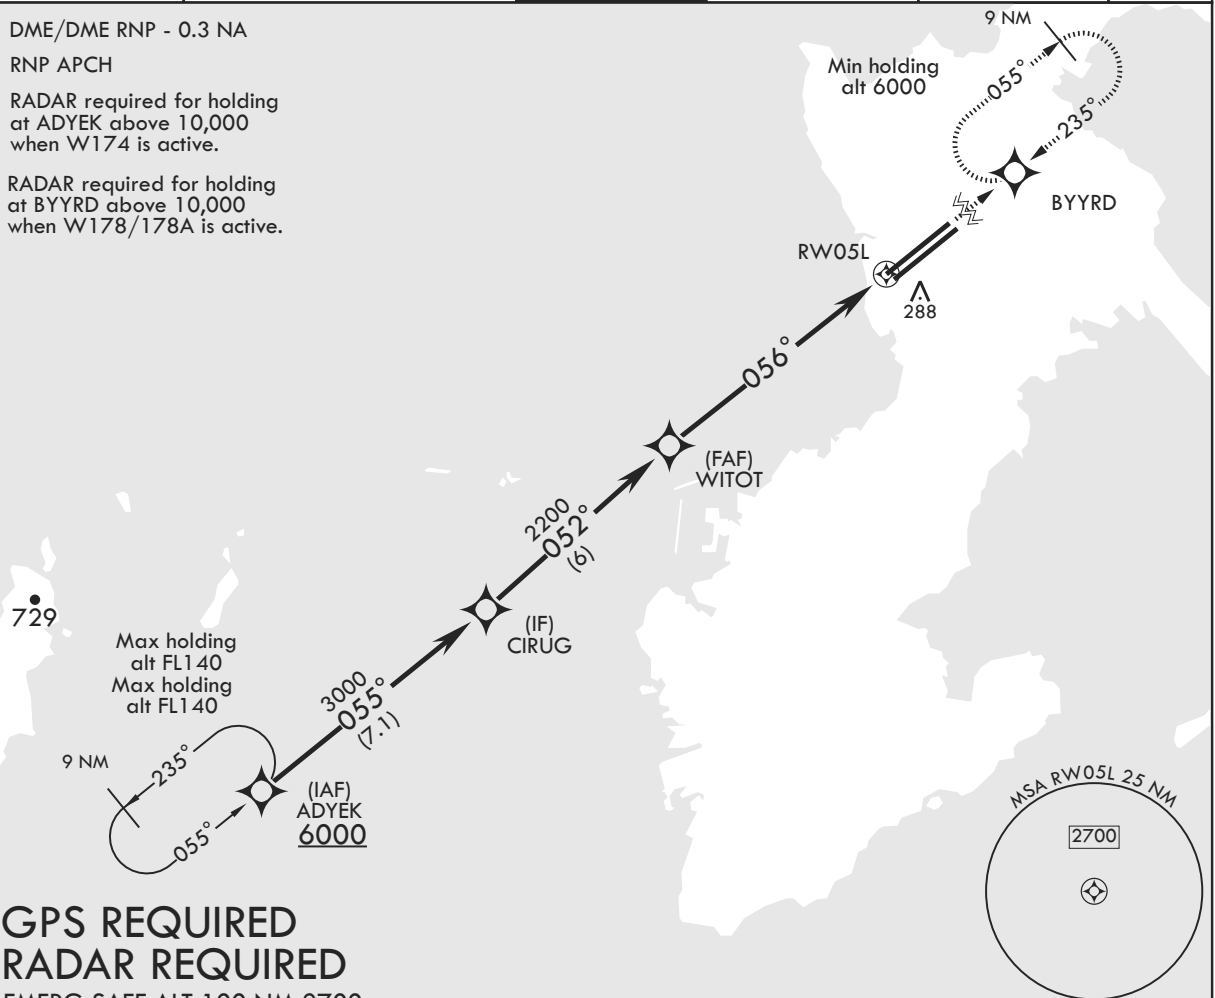**GPS REQUIRED**  
**RADAR REQUIRED**

EMERG SAFE ALT 100 NM 2700

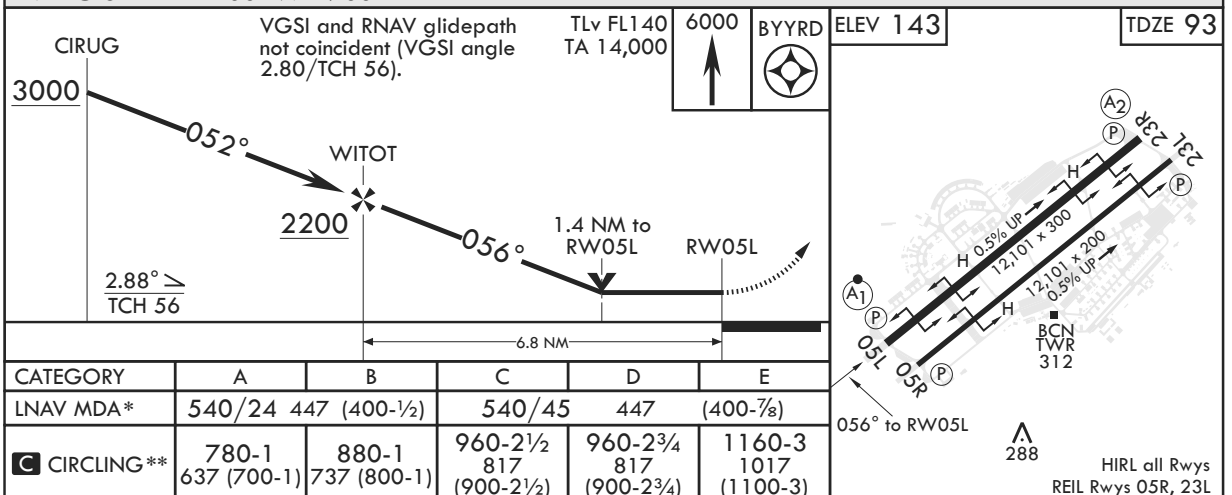

CHANGE : Update

CATEGORY	A	B	C	D	E
LNVA MDA*	540/24 447 (400-1/2)	540/45 447 (400-7/8)	540/45 447 (400-7/8)	540/45 447 (400-7/8)	540/45 447 (400-7/8)
CIRCLING**	780-1 637 (700-1)	880-1 737 (800-1)	960-2 817 (900-2 1/2)	960-2 817 (900-2 3/4)	1160-3 1017 (1100-3)

NOTE: REPRINTING DOD FLIP