

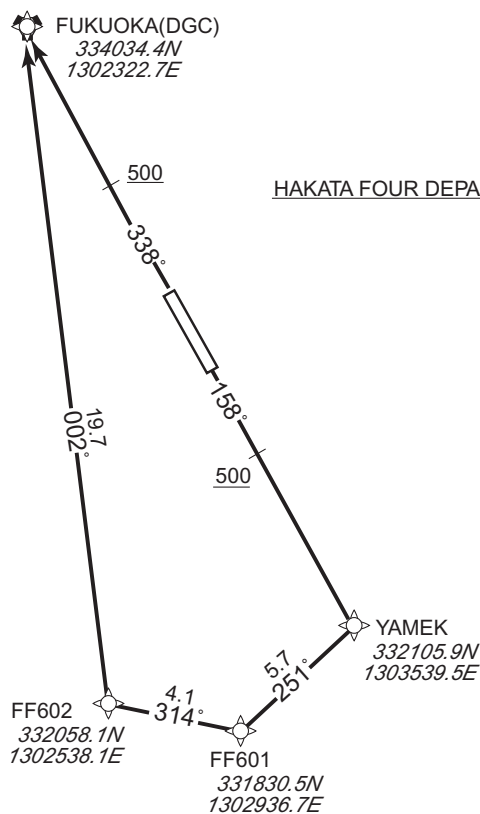
## STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

HAKATA FOUR DEPARTURE		RNAV 1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2 ) RADAR service required.	Critical DME	RWY16 : DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 : DGC "4.6NM to DGC~3.0NM to DGC" IKE "4.6NM to DGC~3.0NM to DGC"
	DME GAP	RWY16 : DER~1.0NM FM DER RWY34 : DER~4.6NM to DGC 3.0NM to DGC~DGC
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

VAR 8°W (2020)

HAKATA FOUR DEPARTURE

RWY34 : Climb on HDG 338° at or above 500FT, direct to DGC.

RWY16 : Climb on HDG 158° at or above 500FT, direct to YAMEK, to FF601, to FF602 to DGC.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

CHANGE : VAR. PROC renamed. PROC course.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

HAKATA FOUR DEPARTURE

## RWY34

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	DGC	—	—	-7.7	—	—	—	—	—	RNAV1

## RWY16

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	YAMEK	—	—	-7.7	—	—	—	—	—	RNAV1
003	TF	FF601	—	251 (242.9)	-7.7	5.7	—	—	—	—	RNAV1
004	TF	FF602	—	314 (306.5)	-7.7	4.1	—	—	—	—	RNAV1
005	TF	DGC	—	002 (354.5)	-7.7	19.7	—	—	—	—	RNAV1

CHANGE : VAR. PROC renamed. PROC course.