

STANDARD DEPARTURE CHART-INSTRUMENT

RJOW / IWAMI

➔ RNAV TRANSITION

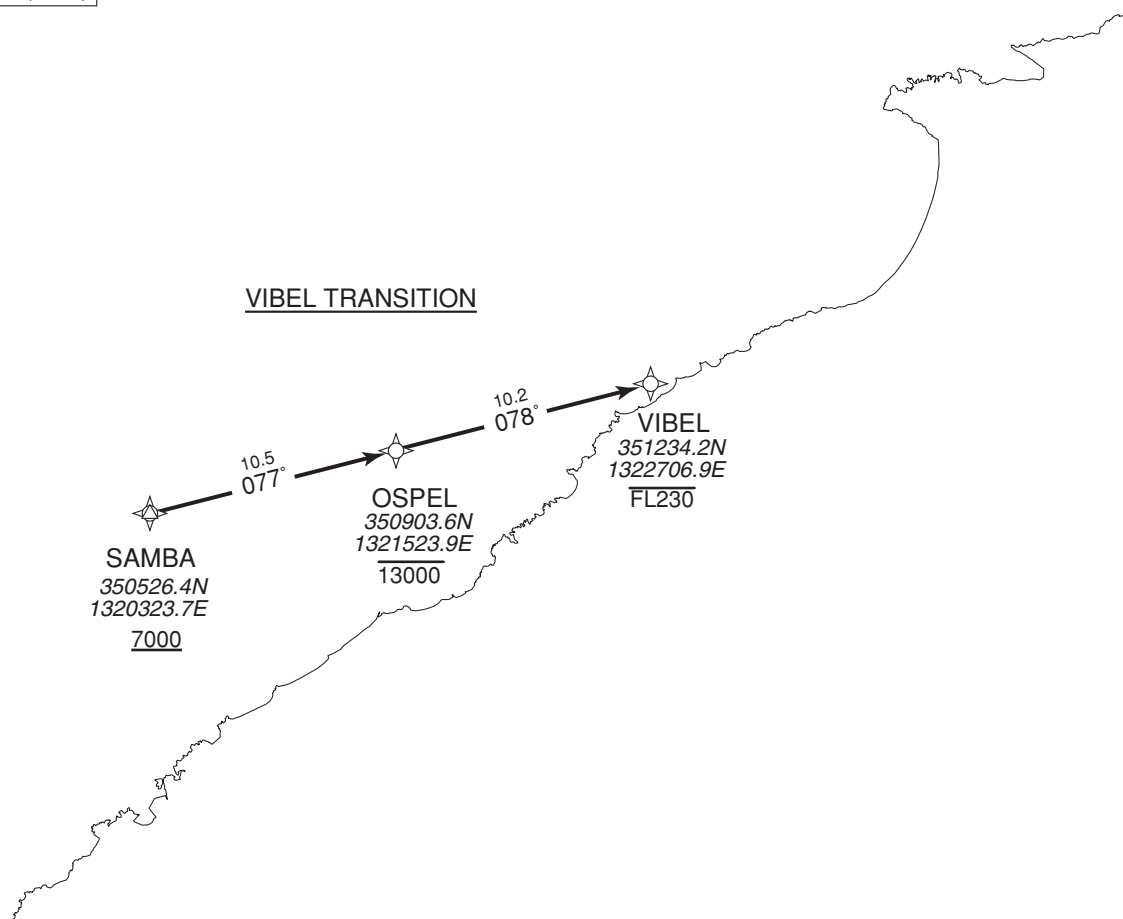
VIBEL TRANSITION

RNAV1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8°W (2017)

**VIBEL TRANSITION**

From SAMBA at or above 7000FT, to OSPEL at or below 13000FT, to VIBEL at or below FL230.

Critical DME	STD : SAMBA – VIBEL
DME GAP	–
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAMBA	–	–	-7.8	–	–	+7000	–	–	RNAV1
002	TF	OSPEL	–	077 (069.7)	-7.8	10.5	–	-13000	–	–	RNAV1
003	TF	VIBEL	–	078 (069.8)	-7.8	10.2	–	-FL230	–	–	RNAV1

CHANGE : New PROC