


STANDARD ARRIVAL CHART -INSTRUMENT

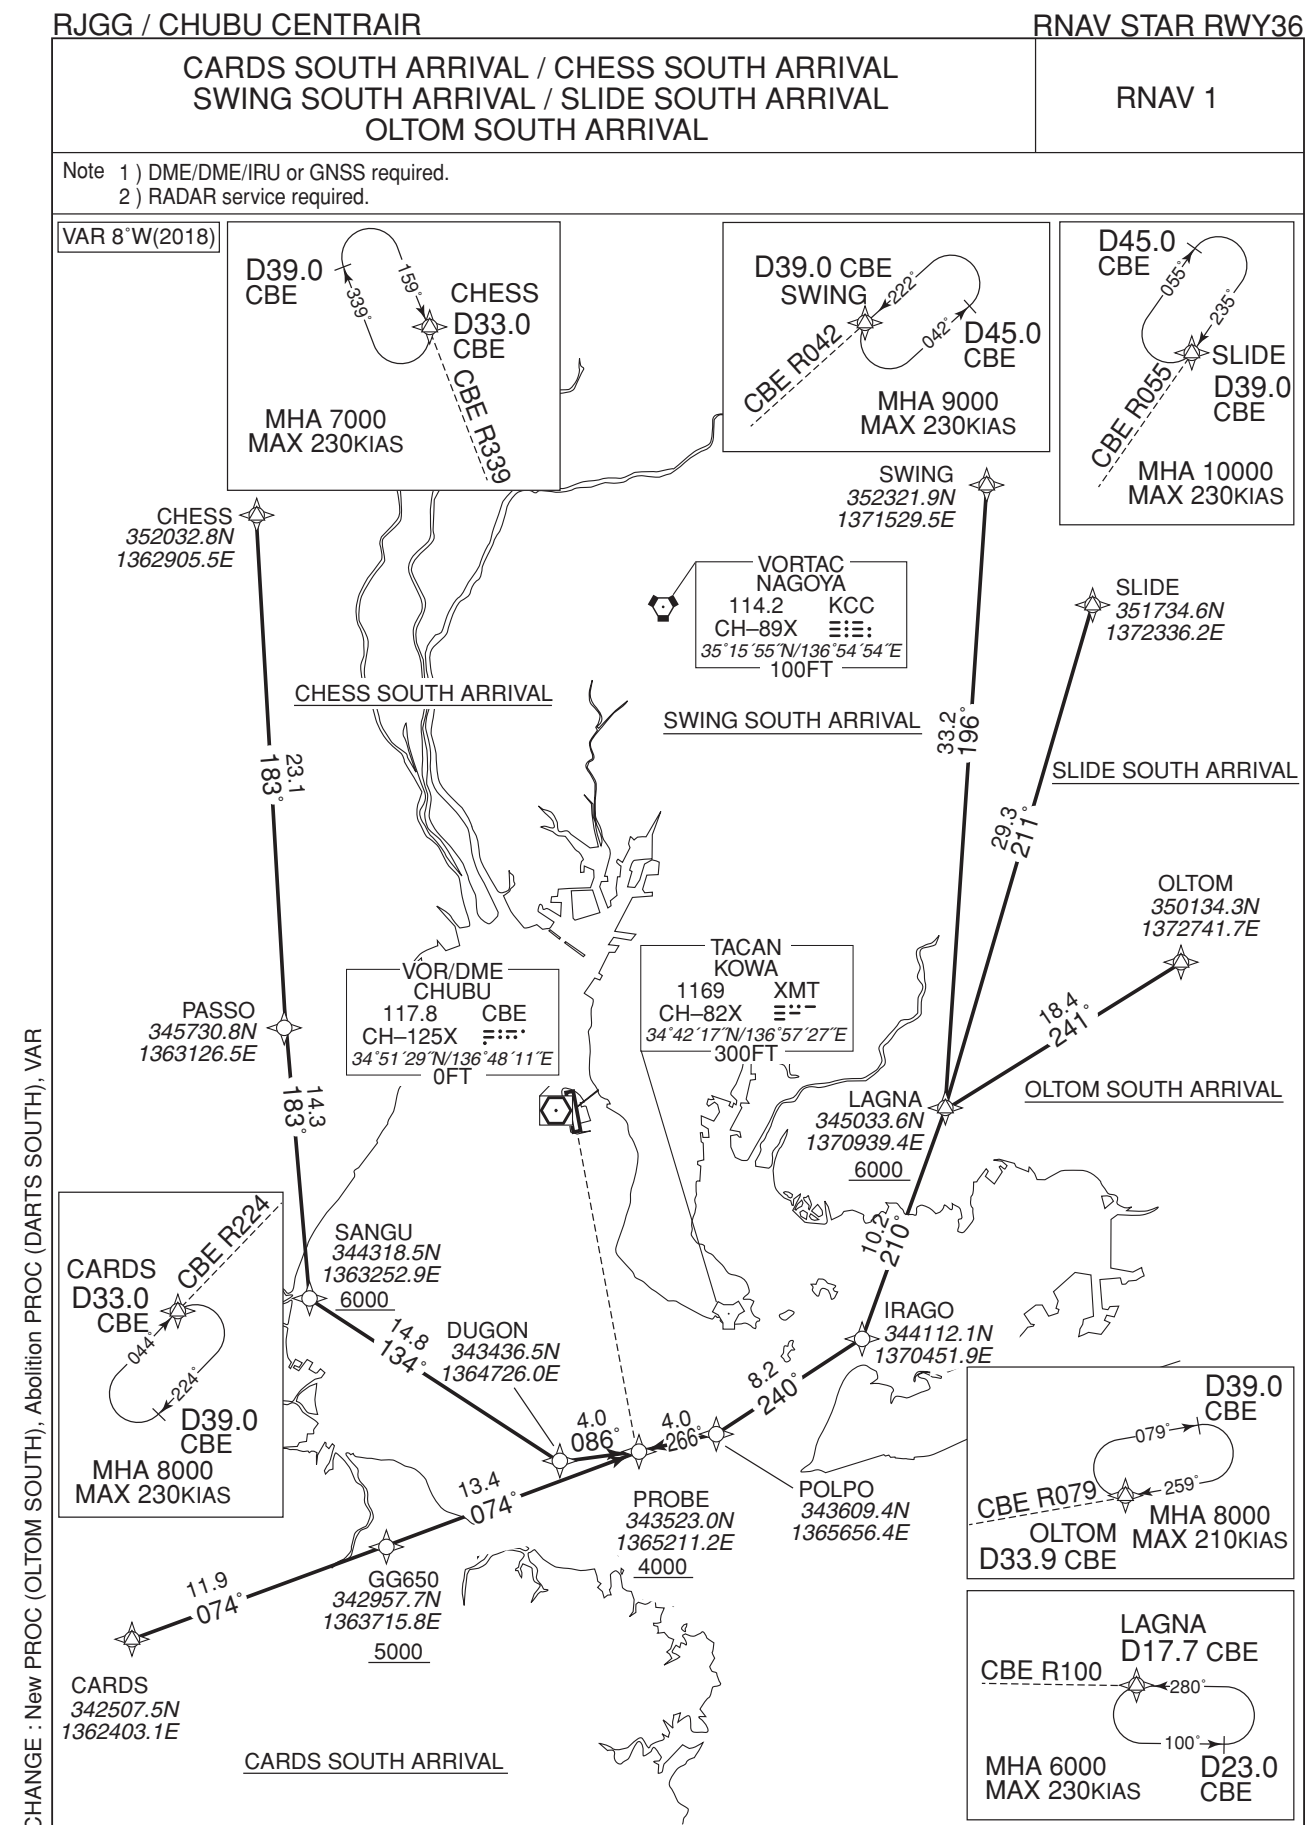

STANDARD ARRIVAL CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV STAR RWY36

CARDS SOUTH ARRIVAL

From CARDS, to GG650 at or above 5000FT, to PROBE at or above 4000FT.

Critical DME	XMT : 10.0NM to PROBE~PROBE
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	CARDS	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	GG650	—	074 (066.0)	-7.6	11.9	—	+5000	—	—	RNAV1
003	TF	PROBE	—	074 (066.1)	-7.6	13.4	—	+4000	—	—	RNAV1

CHESS SOUTH ARRIVAL

From CHESS, to PASSO, to SANGU at or above 6000FT, to DUGON, to PROBE at or above 4000FT.

Critical DME	CBE : 19.1NM to PASSO~5.1NM to PASSO KCC : PASSO~4.2NM to SANGU XMT : 11.0NM to DUGON~PROBE
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	CHESS	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	PASSO	—	183 (175.2)	-7.6	23.1	—	—	—	—	RNAV1
003	TF	SANGU	—	183 (175.2)	-7.6	14.3	—	+6000	—	—	RNAV1
004	TF	DUGON	—	134 (125.9)	-7.6	14.8	—	—	—	—	RNAV1
005	TF	PROBE	—	086 (078.8)	-7.6	4.0	—	+4000	—	—	RNAV1

CHANGE : VAR

STANDARD ARRIVAL CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV STAR RWY36

SWING SOUTH ARRIVAL

From SWING, to LAGNA at or above 6000FT, to IRAGO, to POLPO, to PROBE at or above 4000FT.

Critical DME	KCC : SWING~12.1NM to LAGNA IRAGO~3.0NM to POLPO CBE, XMT : 3.0NM to PROBE~PROBE
DME GAP	3.0NM to POLPO~3.0NM to PROBE
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SWING	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	LAGNA	—	196 (188.3)	-7.6	33.2	—	+6000	—	—	RNAV1
003	TF	IRAGO	—	210 (202.8)	-7.6	10.2	—	—	—	—	RNAV1
004	TF	POLPO	—	240 (232.3)	-7.6	8.2	—	—	—	—	RNAV1
005	TF	PROBE	—	266 (258.8)	-7.6	4.0	—	+4000	—	—	RNAV1

SLIDE SOUTH ARRIVAL

From SLIDE, to LAGNA at or above 6000FT, to IRAGO, to POLPO, to PROBE at or above 4000FT.

Critical DME	KCC : SLIDE~10.3NM to LAGNA IRAGO~3.0NM to POLPO CBE, XMT : 3.0NM to PROBE~PROBE
DME GAP	3.0NM to POLPO ~ 3.0NM to PROBE
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SLIDE	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	LAGNA	—	211 (203.0)	-7.6	29.3	—	+6000	—	—	RNAV1
003	TF	IRAGO	—	210 (202.8)	-7.6	10.2	—	—	—	—	RNAV1
004	TF	POLPO	—	240 (232.3)	-7.6	8.2	—	—	—	—	RNAV1
005	TF	PROBE	—	266 (258.8)	-7.6	4.0	—	+4000	—	—	RNAV1

CHANGE : VAR

STANDARD ARRIVAL CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV STAR RWY36

OLTOM SOUTH ARRIVAL

From OLTOM, to LAGNA at or above 6000FT, to IRAGO, to POLPO, to PROBE at or above 4000FT.

Critical DME	KCC : IRAGO~3.0NM to POLPO XMT, CBE : 3.0NM to PROBE~PROBE
DME GAP	3.0NM to POLPO~3.0NM to PROBE
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OLTOM	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	LAGNA	—	241 (233.4)	-7.6	18.4	—	+6000	—	—	RNAV1
003	TF	IRAGO	—	210 (202.8)	-7.6	10.2	—	—	—	—	RNAV1
004	TF	POLPO	—	240 (232.3)	-7.6	8.2	—	—	—	—	RNAV1
005	TF	PROBE	—	266 (258.8)	-7.6	4.0	—	+4000	—	—	RNAV1

CHANGE : New PROC (OLTOM SOUTH), Abolition PROC (DARTS SOUTH)