

STANDARD DEPARTURE CHART - INSTRUMENT


RJOC / IZUMO

RNAV SID and TRANSITION

MATSUE TWO DEPARTURE  
TSUNO TRANSITION

Basic RNP1

Note GNSS required.

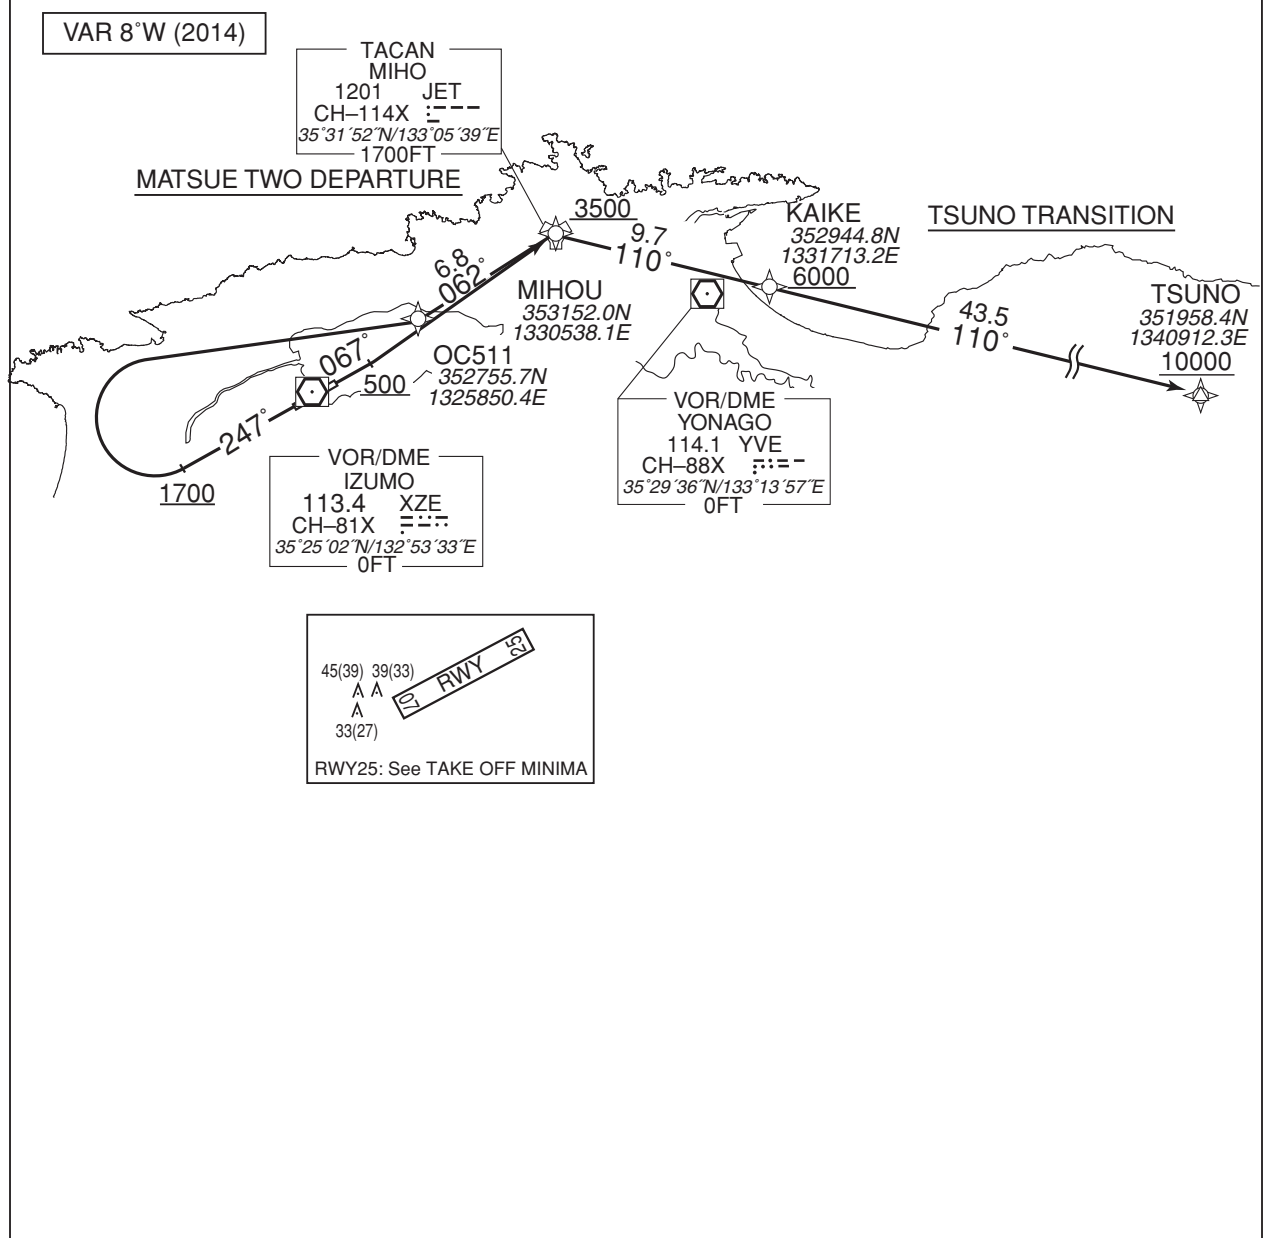

MATSUE TWO DEPARTURE

RWY07 : Climb on HDG067° at or above 500FT, direct to MIHOU at or above 3500FT.

RWY25 : Climb on HDG247° at or above 1700FT, turn right direct to OC511,  
to MIHOU at or above 3500FT.

NOTE RWY07 : 3.5% climb gradient required up to 1300FT.

OBST ALT 1739FT located at 10.9NM 058° FM end of RWY07.

RWY25 : 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

TSUNO TRANSITION

From MIHOU, to KAIKE at or above 6000FT, to TSUNO at or above 10000FT.

CHANGE : MIHO TACAN(JET)

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID and TRANSITION

MATSUE TWO DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC511	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	MIHOU	—	062 (054.5)	-7.6	6.8	—	+3500	—	—	Basic RNP1

TSUNO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1
002	TF	KAIKE	—	110 (102.6)	-7.6	9.7	—	+6000	—	—	Basic RNP1
003	TF	TSUNO	—	110 (102.7)	-7.6	43.5	—	+10000	—	—	Basic RNP1

## RJOC / IZUMO

## RNAV SID

Basic RNP1

VAR 8°W (2014)



RWY07 : Climb on HDG067° at or above 500FT, turn left direct to OC711,  
to TAKHI at or above 3000FT.

RWY25 : Climb on HDG247° at or above 1700FT, turn right direct to OC711, to TAKHI at or above 3000FT.

NOTE RWY07 : 4.6% climb gradient required up to 1300FT.

OBST ALT 1074FT located at 4.8NM 028° FM end of RWY07.

RWY25 : 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

TAKHI ONE DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID


SAIGO ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2014)

SAIGO ONE DEPARTURE

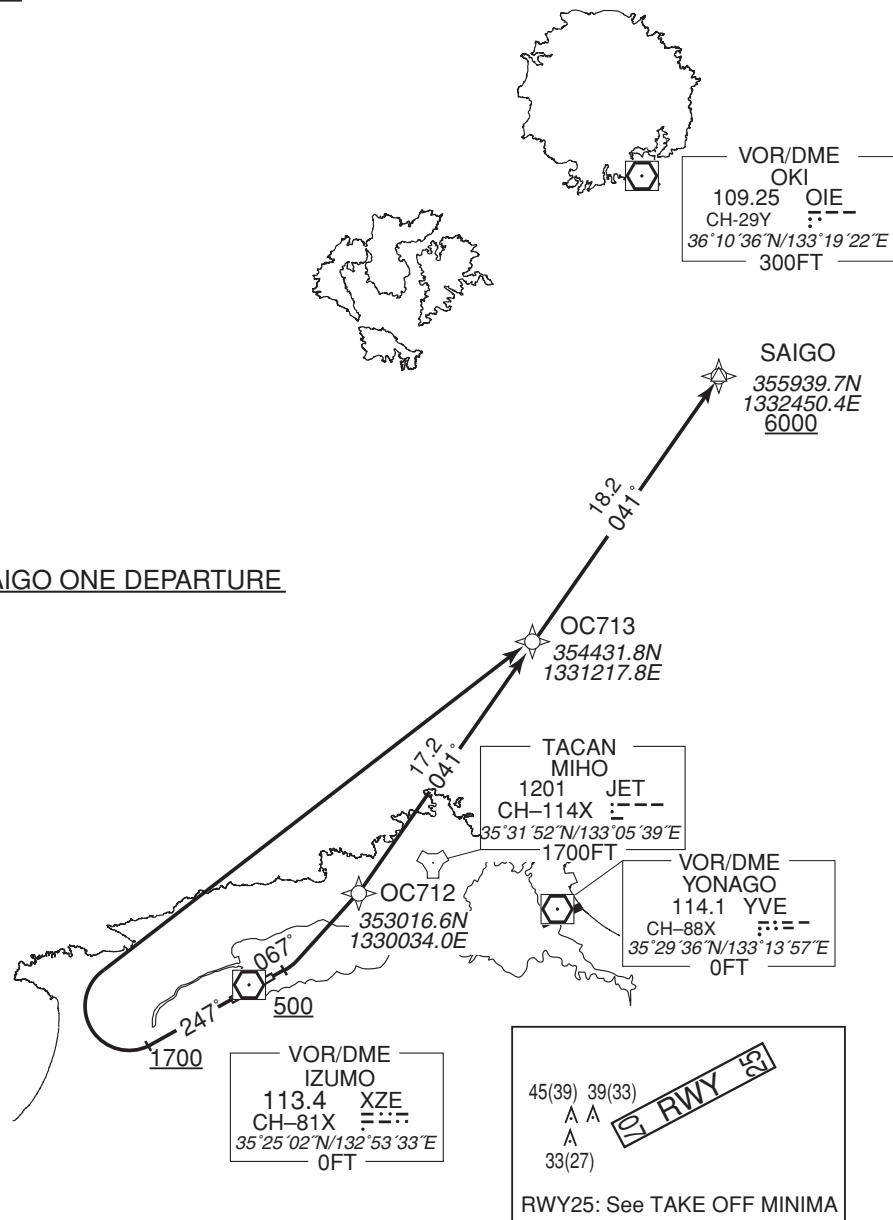

SAIGO ONE DEPARTURE

- RWY07 : Climb on HDG067° at or above 500FT, turn left direct to OC712, to OC713, to SAIGO at or above 6000FT.
- RWY25 : Climb on HDG247° at or above 1700FT, turn right direct to OC713, to SAIGO at or above 6000FT.

NOTE RWY07 : 4.6% climb gradient required up to 800FT.  
OBST ALT 1214FT located at 6.8NM 044° FM end of RWY07.

RWY25 : 4.7% climb gradient required up to 2200FT.  
OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

CHANGE : MIHO TACAN(JET)

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

SAIGO ONE DEPARTURE


## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC712	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC713	—	041 (033.7)	-7.6	17.2	—	—	—	—	Basic RNP1
004	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC713	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

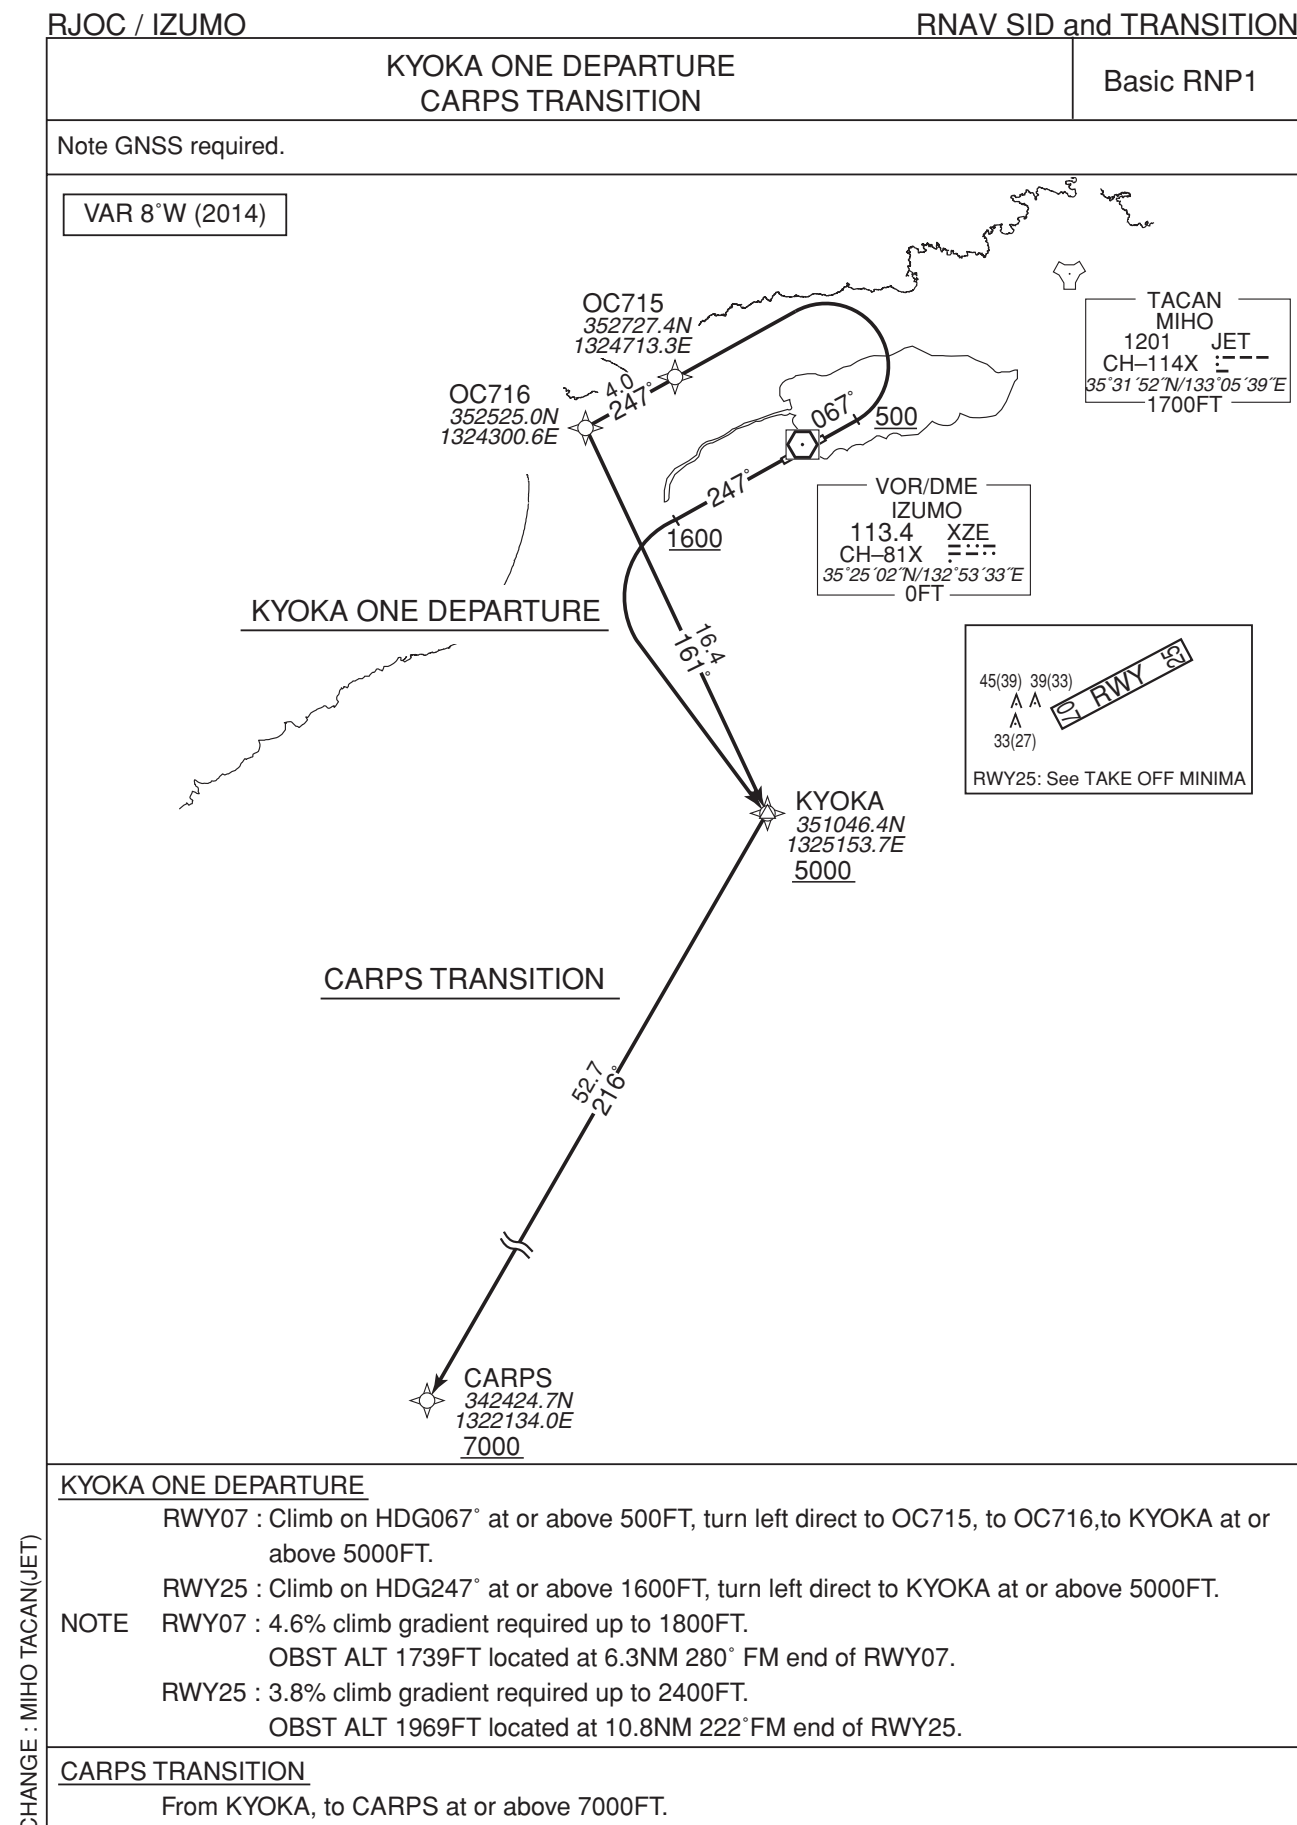

## STANDARD DEPARTURE CHART - INSTRUMENT

## RJOC / IZUMO

## RNAV SID and TRANSITION

KYOKA ONE DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC715	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC716	—	247 (239.3)	-7.6	4.0	—	—	—	—	Basic RNP1
004	TF	KYOKA	—	161 (153.6)	-7.6	16.4	—	+5000	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1600	—	—	Basic RNP1
002	DF	KYOKA	—	—	-7.6	—	L	+5000	—	—	Basic RNP1

CARPS TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KYOKA	—	—	-7.6	—	—	+5000	—	—	Basic RNP1
002	TF	CARPS	—	216 (208.4)	-7.6	52.7	—	+7000	—	—	Basic RNP1