

AD 2 AERODROMES

RJBT AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJBT - TAJIMA

RJBT AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	353046N/1344713E 003°/0.6km FM RWY 01 THR
2	Direction and distance from (city)	2.6NM SW from TOYOOKA city
3	Elevation/ Reference temperature	578ft / 31°C(2015-2019)
4	Geoid undulation at AD ELEV PSN	To be developed
5	MAG VAR/ Annual change	8°W(2020) / 5'W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	TAJIMA AIRPORT TERMINAL CO.,LTD. 1598-34, Aza-Kodani, Iwai, Toyooka-city, Hyogo Pref. Tel: 0796-26-1500 Fax: 0796-26-1501
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	Nil

RJBT AD 2.3 OPERATIONAL HOURS

1	AD Administration	2330 - 0930
2	Customs and immigration	On request Customs: 078-333-3010 Immigration: 078-391-6377
3	Health and sanitation	Quarantine(human): On request(078-672-9653) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	Nil
7	ATS	2330 - 0930 Remarks: Airport Remote Mobile Communication Service provided by Osaka FSC.
8	Fuelling	2330 - 0930
9	Handling	2330 - 0930
10	Security	0015 - 0915
11	De-icing	Nil
12	Remarks	Nil

RJBT AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	JET A-1, AVGAS 100LL
3	Fuelling facilities/ capacity	Fuel truck(200L/min)
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RJBT AD 2.5 PASSENGER FACILITIES

1	Hotels	Not at Airport, but in Toyooka city
2	Restaurants	Not at Airport, but in Toyooka city
3	Transportation	Busses and Taxis
4	Medical facilities	Not at Airport, but in Toyooka city
5	Bank and Post Office	Not at Airport, but in Toyooka city
6	Tourist Office	Nil
7	Remarks	Nil

RJBT AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 4 on scheduled FLT OPS CAT 3 on other OPS
2	Rescue equipment	Chemical fire fighting truck x 2 on scheduled FLT OPS Chemical fire fighting truck x 1 on other OPS
3	Capability for removal of disabled aircraft	Ask AD administration
4	Remarks	Nil

RJBT AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Snow removal equipments: Snow plow x 2, Wheel loader x 1, Snow rotary x 2, Snow sweeper x 2
2	Clearance priorities	1.RWY 2.TWY 3.APRON
3	Remarks	Seasonal availability: Winter season only Snow removal will be commenced, if RWY are covered with snow a depth of 3cm or more in principle.

RJBT AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface: asphalt-concrete Strength: PCN 12/F/B/Y/T
2	Taxiway width, surface and strength	Terminal apron Width: 18m Surface: asphalt-concrete Strength: PCN 12/F/B/Y/T
3	ACL and elevation	Not available
4	VOR checkpoints	Not Available
5	INS checkpoints	Spot NR 1: 353057.11N/1344719.04E 2: 353058.83N/1344719.15E 3: 353100.45N/1344719.25E
6	Remarks	Nil

RJBT AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY:01/19 (Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe (LGT) REDL, RTHL, RENL, RWY DIST marker LGT TWY: (Marking) TWY CL, RWY HLDG PSN, TWY side stripe Mandatory instruction (LGT) TWY edge LGT
3	Stop bars	Nil
4	Remarks	(Marking) Overrun area (LGT) Apron flood LGT

RJBT AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas

RWY/Area affected	Obstacle type	Coordinates	Elevation	Markings/LGT	Remarks
Nil					

In circling area and at AD

Obstacle type	Coordinates	Elevation	Markings/LGT	Remarks
Building	353046N/1344732E	636ft	Nil / LIL	Transitional Surface
Structure	353054N/1344720E	594ft	Nil / LIL	Transitional Surface
Mountain	353050N/1344647E	899ft	Nil / LIM(Red)	Horizontal Surface

RJBT AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	TAJIMA AIRPORT TERMINAL CO.,LTD
2	Hours of service MET Office outside hours	2330 - 0930 Nil
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Nil
6	Flight documentation Language(s) used	C, En, Jp
7	Charts and other information available for briefing or consultation	S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , P _S , P ₅ , P ₃ , P ₂₅ , P _{SW} (Domestic), U ₂ /T _r , C, N, E
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	Osaka FSC (using RAG) TAJIMA AIRPORT TERMINAL CO.,LTD.(Flight Advisory Service Station)
10	Additional information (limitation of service, etc.)	Nil

RJBT AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
01	003.00°	1200×30	PCN 12/F/B/Y/T Asphalt-Concrete	353026.83N 1344711.94E	THR ELEV: 583.5FT
19	183.00°	1200×30	PCN 12/F/B/Y/T Asphalt-Concrete	353105.71N 1344714.43E	THR ELEV: 572.7FT
Slope of RWY	Strip Dimensions(M)		RESA (Overrun) Dimensions(M)	Remarks	
7	10		11	14	
See AD2.24 AD Chart	1320×120		40×120	RWY grooving : 1200m × 30m	
See AD2.24 AD Chart	1320×120		40×120	RWY grooving : 1200m × 30m	

RJBT AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
01	1200	1200	1200	1200	Nil
19	1200	1200	1200	1200	Nil

RJBT AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
01	Nil	Green -	PAPI 3.0°/LEFT 294.0m 45ft	Nil	Nil	1200m 60m Coded color (White/Yellow) LIH	Red	Nil (*1)
19	Nil	Green -	PAPI 3.0°/LEFT 263.8m 45ft	Nil	Nil	1200m 60m Coded color (White/Yellow) LIH	Red	Nil (*1)
Remarks								
10								
Overrun area edge LGT(LEN:60m Color:Red)(*1) CGL for RWY 01/19, East side only RWY THR ID LGT for RWY 01/19 THR (Color: White)								

RJBT AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 353055N/1344722E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI: Nil Anemometer: RWY01: 225m inside FM RWY01 THR, LGTD RWY19: 90m inside FM RWY19 THR, near WDI LGT
3	TWY edge and center line lighting	TWY edge LGT: Blue TWY centerline LGT: Nil
4	Secondary power supply/ switch-over time	All lights within 15 seconds
5	Remarks	WDI LGT

RJBT AD 2.16 HELICOPTER LANDING AREA

Nil

RJBT AD 2.17 ATS AIRSPACE

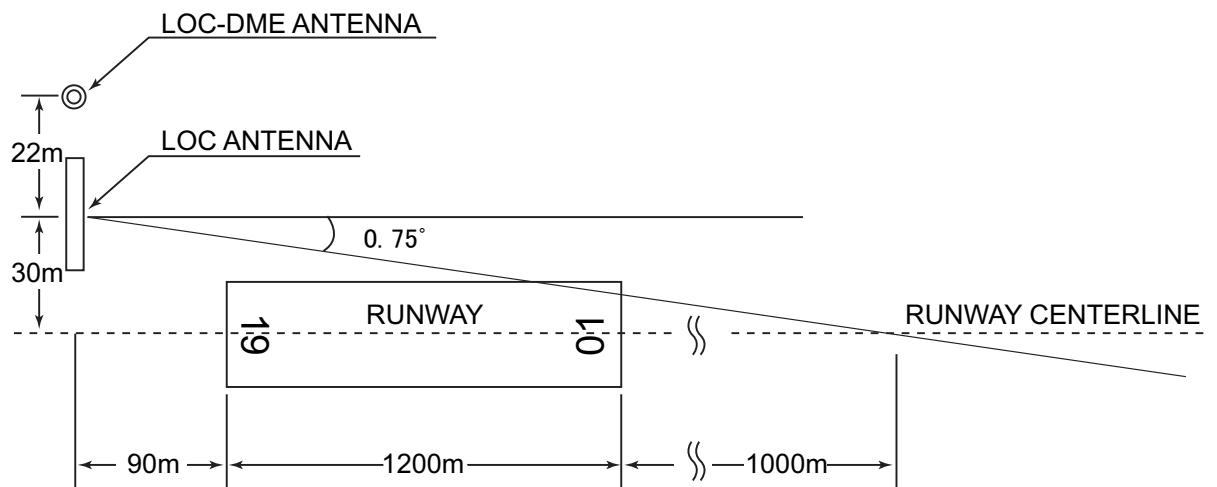
Designation and lateral limits	Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1	2	3	4	6
Nil				

RJBT AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
A/G	TAJIMA REMOTE	118.4MHz	2330 - 0930	Remote air-ground facility controlled by Osaka FSC
A/G	TAJIMA FLIGHT SERVICE	130.8MHz	2330 - 0930	FOR AD INFO ONLY

RJBT AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR	THE	110.45MHz	2330 - 0930	353104.66N/ 1344729.27E		
DME	THE	1128MHz (CH-41Y)	2330 - 0930	353104.66N/ 1344729.27E	688.6ft	
LOC 01	ITH	108.55MHz	2330 - 0930	353108.56N/ 1344715.81E		LOC:90m(295ft) away FM RWY 19 THR, 30m(98ft) E of RCL, BRG(MAG)11°, Offset angle 0.75°.
LOC-DME 01	ITH	1109MHz (CH-22Y)	2330 - 0930	353108.53N/ 1344716.68E	572ft	DME:90m(295ft) away FM RWY 19 THR, 52m(171ft) E of RCL.
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based.

LOC

REMARKS : 1. LOC OFF SET ANGLE 0.75°
 2. LOC beam BRG(MAG) 11°
 3. ELEV of LOC-DME 174.2m(572ft)

RJBT AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

1. On use of Tajima airport, aircraft operator is required to notify AD administrator in advance.
2. Training flight is subject to the coordination with AD administrator in advance.
Contact Number: 0796-26-1500

1. 空港の使用について、航空機の運航者はあらかじめ但馬空港ターミナル株式会社に届け出ること。
2. 訓練飛行を行うときは、但馬空港ターミナル株式会社と事前に調整すること。
連絡先：0796-26-1500

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Ask AD Administrator

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RJBT AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

RJBT AD 2.22 FLIGHT PROCEDURES

1.TAKE OFF MINIMA								
	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	01	A,B,C	-	-	-	400m	-	500m
	19	A,B,C	-	-	-	400m	-	500m
OTHER	01	A,B,C	AVBL LDG MINIMA					
	19	A,B,C						

2.IFR Operation Procedures at Tajima Aerodrome

2.1 Departure

- 1) Pilot shall request ATC clearance on 118.4MHz to Tajima Remote, thereafter, follow the instructions from ATC via Tajima Remote. (ATC does not instruct to change to Tajima Flight Service frequency.)
- 2) Tajima Flight Service provides the aerodrome information on 130.8MHz.
- 3) Pilot shall report the airborne time to Tajima Remote.

2.2 Arrival

- 1) Pilot shall monitor Tajima Remote frequency at all times, follow the instructions from ATC via Tajima Remote. (ATC does not instruct to change to Tajima Flight Service frequency.)
- 2) Tajima Flight Service provides the aerodrome information on 130.8MHz.
- 3) Pilot shall report the landing time to Tajima Remote.

2.3 Radio Communication Equipment

Aircraft intended to fly in accordance with IFR at Tajima aerodrome shall be equipped with two sets or more of radio communication equipment.

2. 但馬飛行場における計器飛行方式の運用方法

2.1 出発機

- 1) 管制承認は、118.4MHz で但馬リモートに要求し、以後は管制機関（但馬リモート経由）の指示に従うこと。
（管制機関は但馬フライトサービスへの周波数の切り替えを指示しない。）
- 2) 離陸に係る飛行場情報の提供は、但馬フライトサービス（130.8MHz）により行われる。
- 3) 離陸時刻を但馬リモートに通報すること。

2.2 到着機

- 1) 但馬リモートの周波数を常時聴取し、管制機関（但馬リモート経由）の指示に従うこと。
（管制機関は但馬フライトサービスへの周波数の切り替えを指示しない。）
- 2) 着陸に係る飛行場情報の提供は、但馬フライトサービス（130.8MHz）により行われる。
- 3) 着陸時刻を但馬リモートに通報すること。

2.3 無線通信機

但馬飛行場において計器飛行方式により飛行する航空機は、常時2局以上と交信可能な無線機器の搭載が必要である。

RJBT AD 2.23 ADDITIONAL INFORMATION

Nil

RJBT AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart
Standard Departure Chart - Instrument (MIYAZU)
Standard Departure Chart - Instrument (TAJIMA REVERSAL)
Standard Departure Chart - Instrument (ROKKO)
Instrument Approach Chart (LOC Z RWY01)
Instrument Approach Chart (LOC Y RWY01)
Instrument Approach Chart (VOR A)*
Instrument Approach Chart (RNAV(GNSS) RWY01)
Instrument Approach Chart (RNAV(GNSS) RWY19)
Other Chart (Visual REP)
Other Chart (LDG CHART)
Other Chart (MVA CHART)

*: Designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.