

INSTRUMENT APPROACH CHART

RODN / KADENA

APCH CRS 235°	Rwy Idg 12,101
	TDZE 129
	Arpt Elev 143

RNAV(GPS) RWY23R

▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/4 miles.
 ** Circling NA NW of Rwy 05L-23R.

SALS
A2

MISSED APPROACH: Climbing left turn
to 6000 direct ADYEK and hold.
Continue climb-in-hold to 6000.


ATIS★ 124.2 280.5	NAHA APP CON/DEP CON 119.1 335.8 NORTHWEST 126.5 258.3 SOUTHEAST	TOWER 134.1 315.8	GND CON CTL 118.5 275.8	CLNC DEL 123.3 235.0	ASR
----------------------	--	----------------------	----------------------------	-------------------------	-----

DME/DME RNP - 0.3 NA

RNP APCH

RADAR required for holding
at ADYEK above 10,000
when W174 is active.

RADAR required for holding
at BYYRD above 10,000
when W178/178A is active.

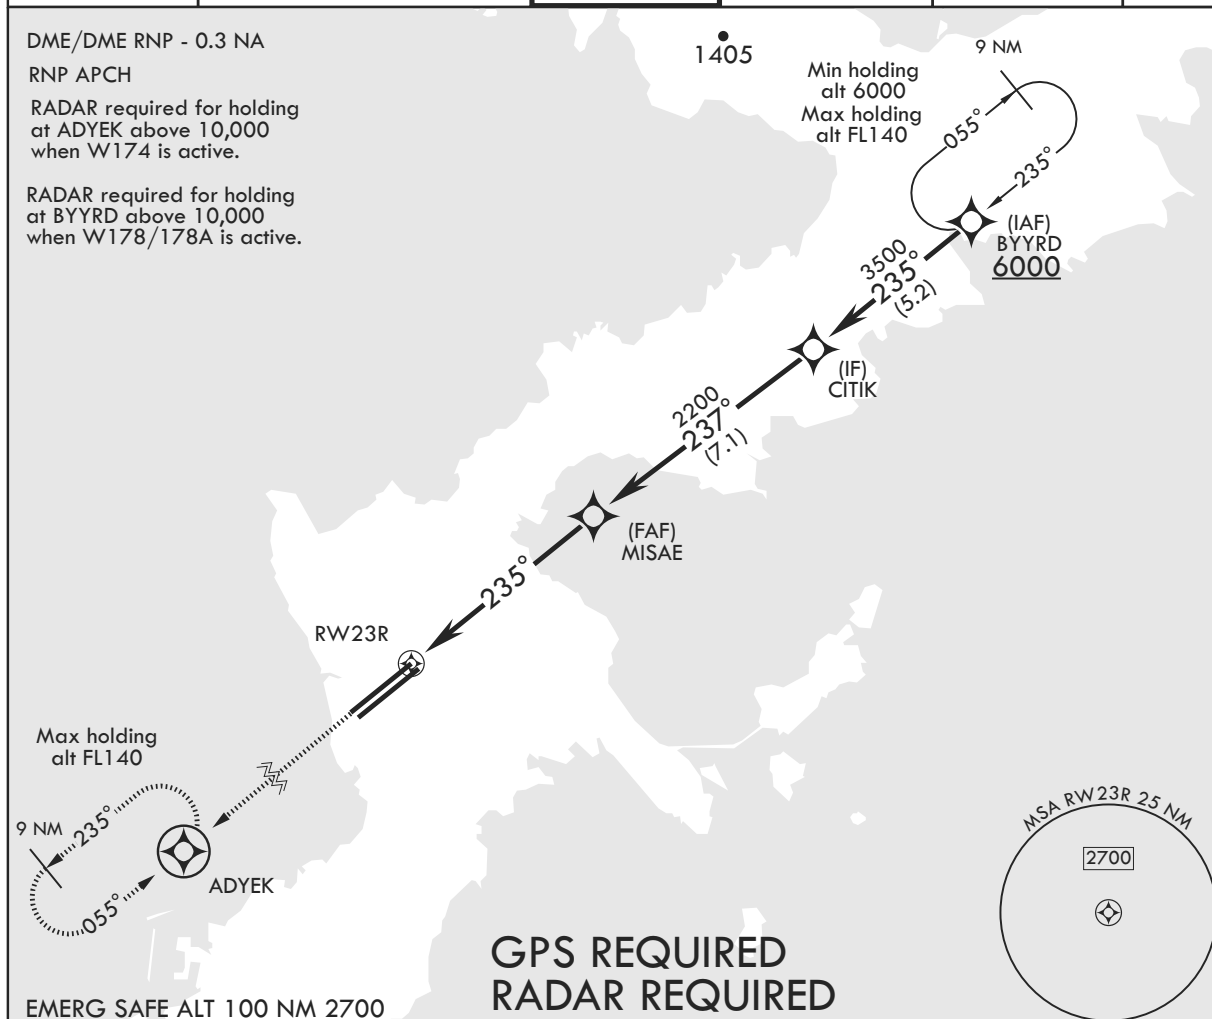

EMERG SAFE ALT 100 NM 2700

6000



TLv FL140
TA 14,000

CITIK

3500

MISAE

2200

RW23R

1.7 NM to RW23R

235°

237°


≤ 3.18°
TCH 49

6 NM

ELEV 143

TDZE 129

235° to RW23R

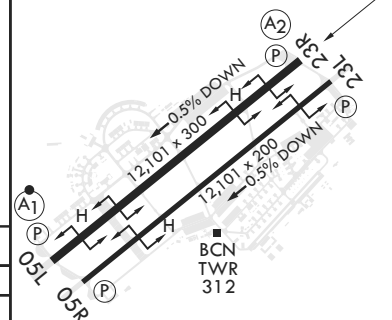

HIRL all Rws
REIL Rws 05R, 23L

CHANGE : Update

CATEGORY	A	B	C	D	E
LNAV MDA*	720/40 591 (600-3/4)	720-1 3/8 591 (600-1 3/8)			
CIRCLING**	780-1 637 (700-1)	880-1 737 (800-1)	960-2 1/2 817 (900-2 1/2)	960-2 3/4 817 (900-2 3/4)	1160-3 1017 (1100-3)

NOTE: REPRINTING DOD FLIP