

STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

RNAV SID

STAGE TWO DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.

2) RADAR service required.

Critical DME

RWY07 :

OIE : 12.6NM to STAGE - STAGE

RWY25 :

JET : 10.0NM to OH501 - 6.0NM to OH501

OIE : 6.0NM to OH501 - 4.0NM to OH501

OH501 - OH701

12.6NM to STAGE - STAGE

DME GAP

RWY07 :DER - 8.7NM to OH701


RWY25 :DER - 10.0NM to OH501

Inappropriate Navaids

See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8°W (2020)

STAGE TWO DEPARTURE

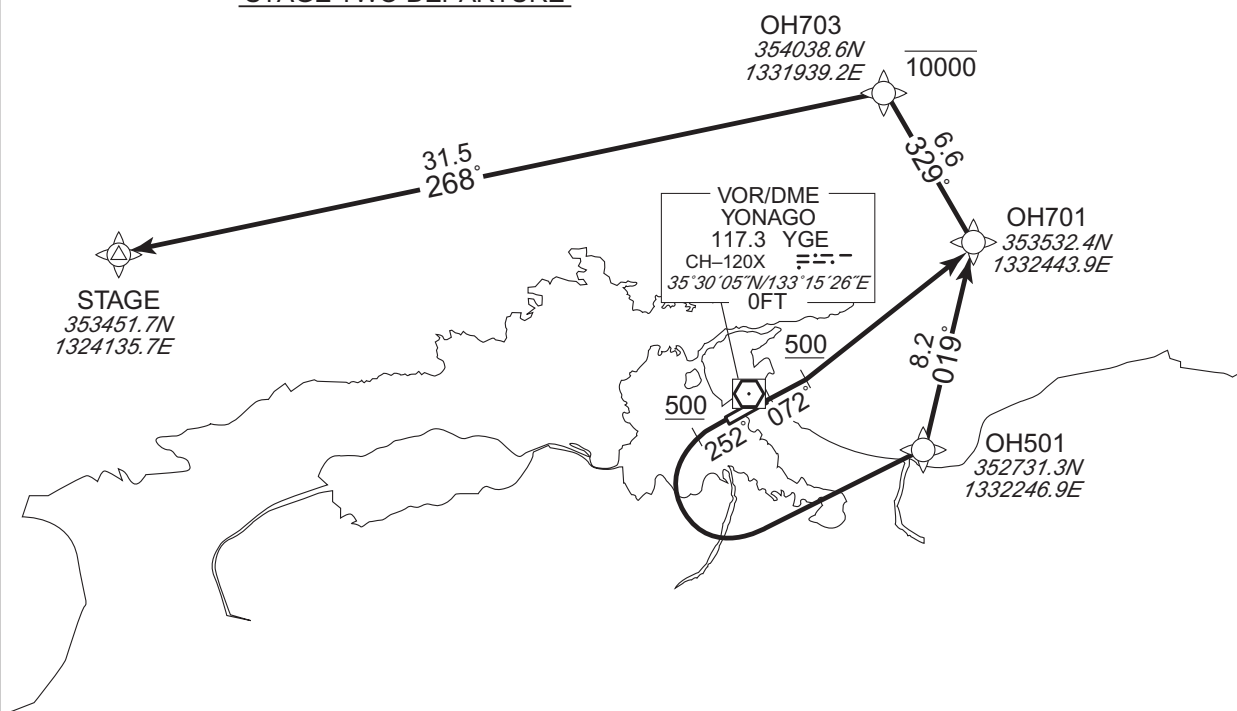

STAGE TWO DEPARTURE

RWY07 : Climb on HDG072° at or above 500FT, direct to OH701, to OH703 at or below 10000FT, to STAGE.

RWY25 : Climb on HDG252° at or above 500FT, turn left direct to OH501, to OH 701, to OH703 at or below 10000FT, to STAGE.

NOTE RWY25 : 5.0% climb gradient required up to 700FT.

OBST ALT 1182FT located at 6.2NM 214° FM end of RWY25.

CHANGE : VAR. PROC renamed. PROC course. Note RWY25(OBST). YONAGO VOR/DME.

STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

RNAV SID

STAGE TWO DEPARTURE

RWY07

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 072 (063.9) | -8.3 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | OH701 | — | — | -8.3 | — | — | — | — | — | RNAV1 |
| 003 | TF | OH703 | — | 329 (321.1) | -8.3 | 6.6 | — | -10000 | — | — | RNAV1 |
| 004 | TF | STAGE | — | 268 (259.6) | -8.3 | 31.5 | — | — | — | — | RNAV1 |

RWY25

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 252 (243.9) | -8.3 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | OH501 | — | — | -8.3 | — | L | — | — | — | RNAV1 |
| 003 | TF | OH701 | — | 019 (011.2) | -8.3 | 8.2 | — | — | — | — | RNAV1 |
| 004 | TF | OH703 | — | 329 (321.1) | -8.3 | 6.6 | — | -10000 | — | — | RNAV1 |
| 005 | TF | STAGE | — | 268 (259.6) | -8.3 | 31.5 | — | — | — | — | RNAV1 |

CHANGE : VAR. PROC renamed, PROC course.