

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI


SID

DOZEN FOUR DEPARTURE

RWY08 : Climb RWY HDG to 800FT, turn right HDG258°...

RWY26 : Climb RWY HDG to 900FT, turn left HDG168°...

...to intercept and proceed via OIE R213 to DOZEN.

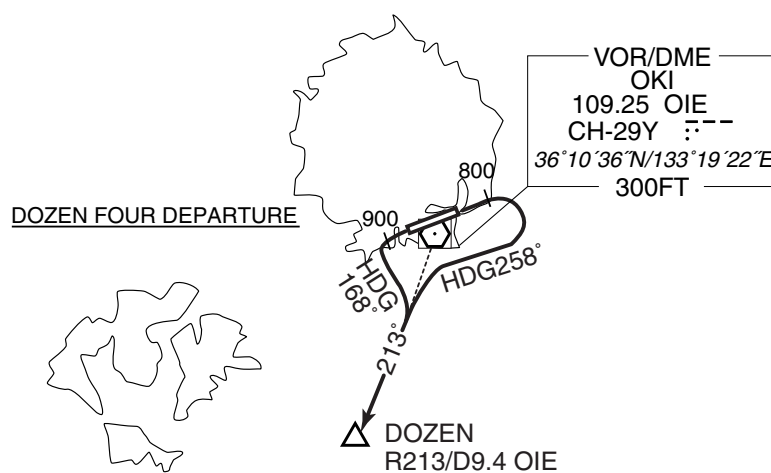

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI


RNAV SID

NAKAU ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2014)

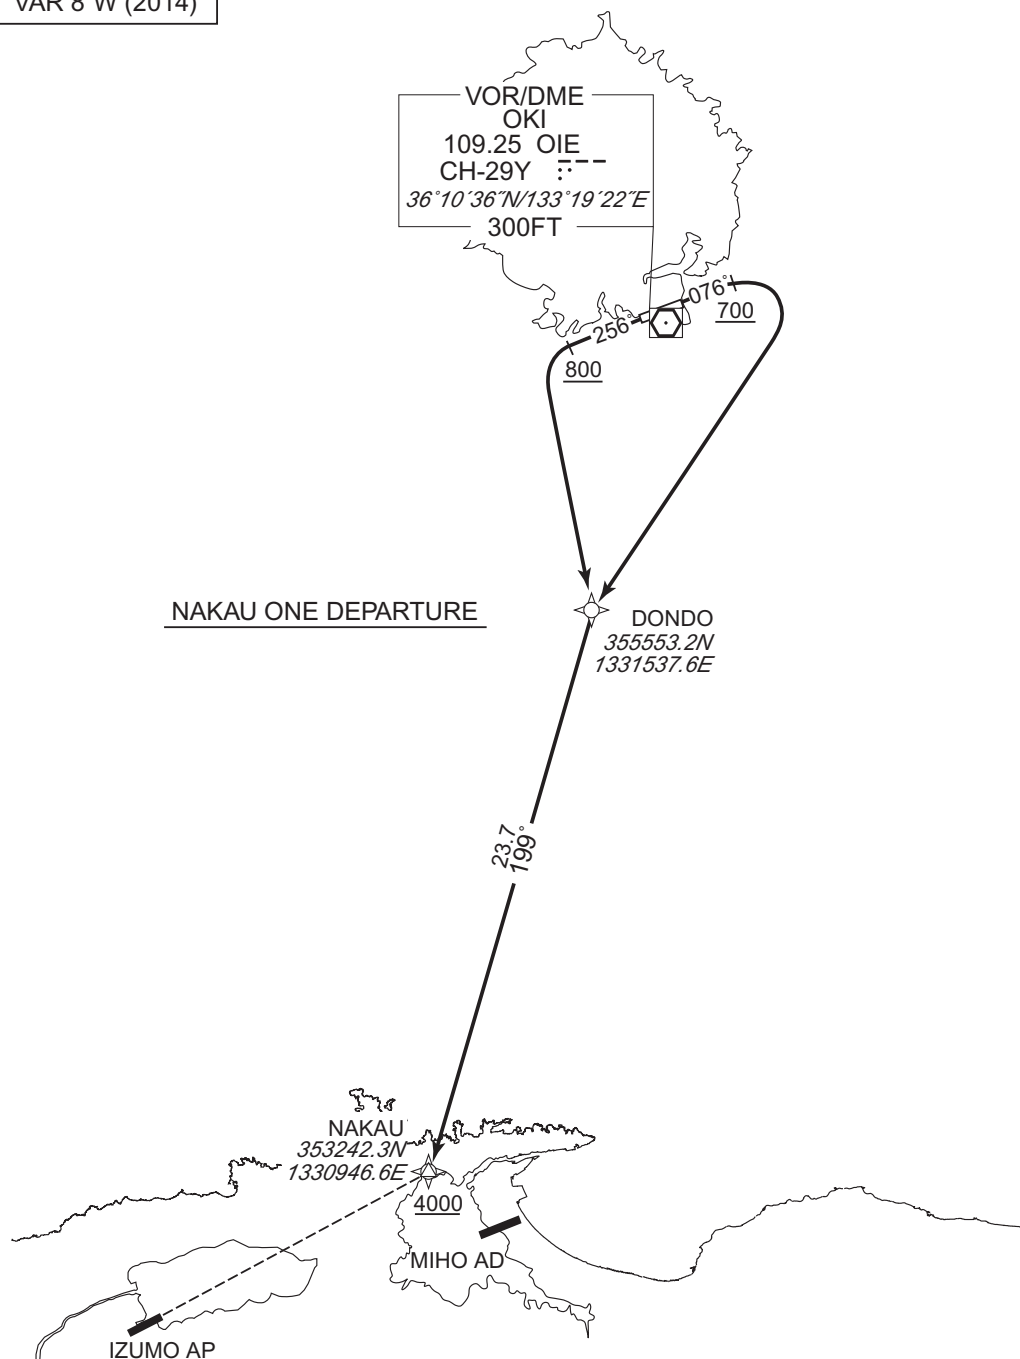

NAKAU ONE DEPARTURE

- RWY08 : Climb on HDG 076° at or above 700FT, turn right direct to DONDO, to NAKAU at or above 4000FT.
- RWY26 : Climb on HDG 256° at or above 800FT, turn left direct to DONDO, to NAKAU at or above 4000FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

NAKAU ONE DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	076 (067.8)	-7.9	—	—	+700	—	—	Basic RNP1
002	DF	DONDO	—	—	-7.9	—	R	—	—	—	Basic RNP1
003	TF	NAKAU	—	199 (191.6)	-7.9	23.7	—	+4000	—	—	Basic RNP1


RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	256 (247.8)	-7.9	—	—	+800	—	—	Basic RNP1
002	DF	DONDO	—	—	-7.9	—	L	—	—	—	Basic RNP1
003	TF	NAKAU	—	199 (191.6)	-7.9	23.7	—	+4000	—	—	Basic RNP1

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

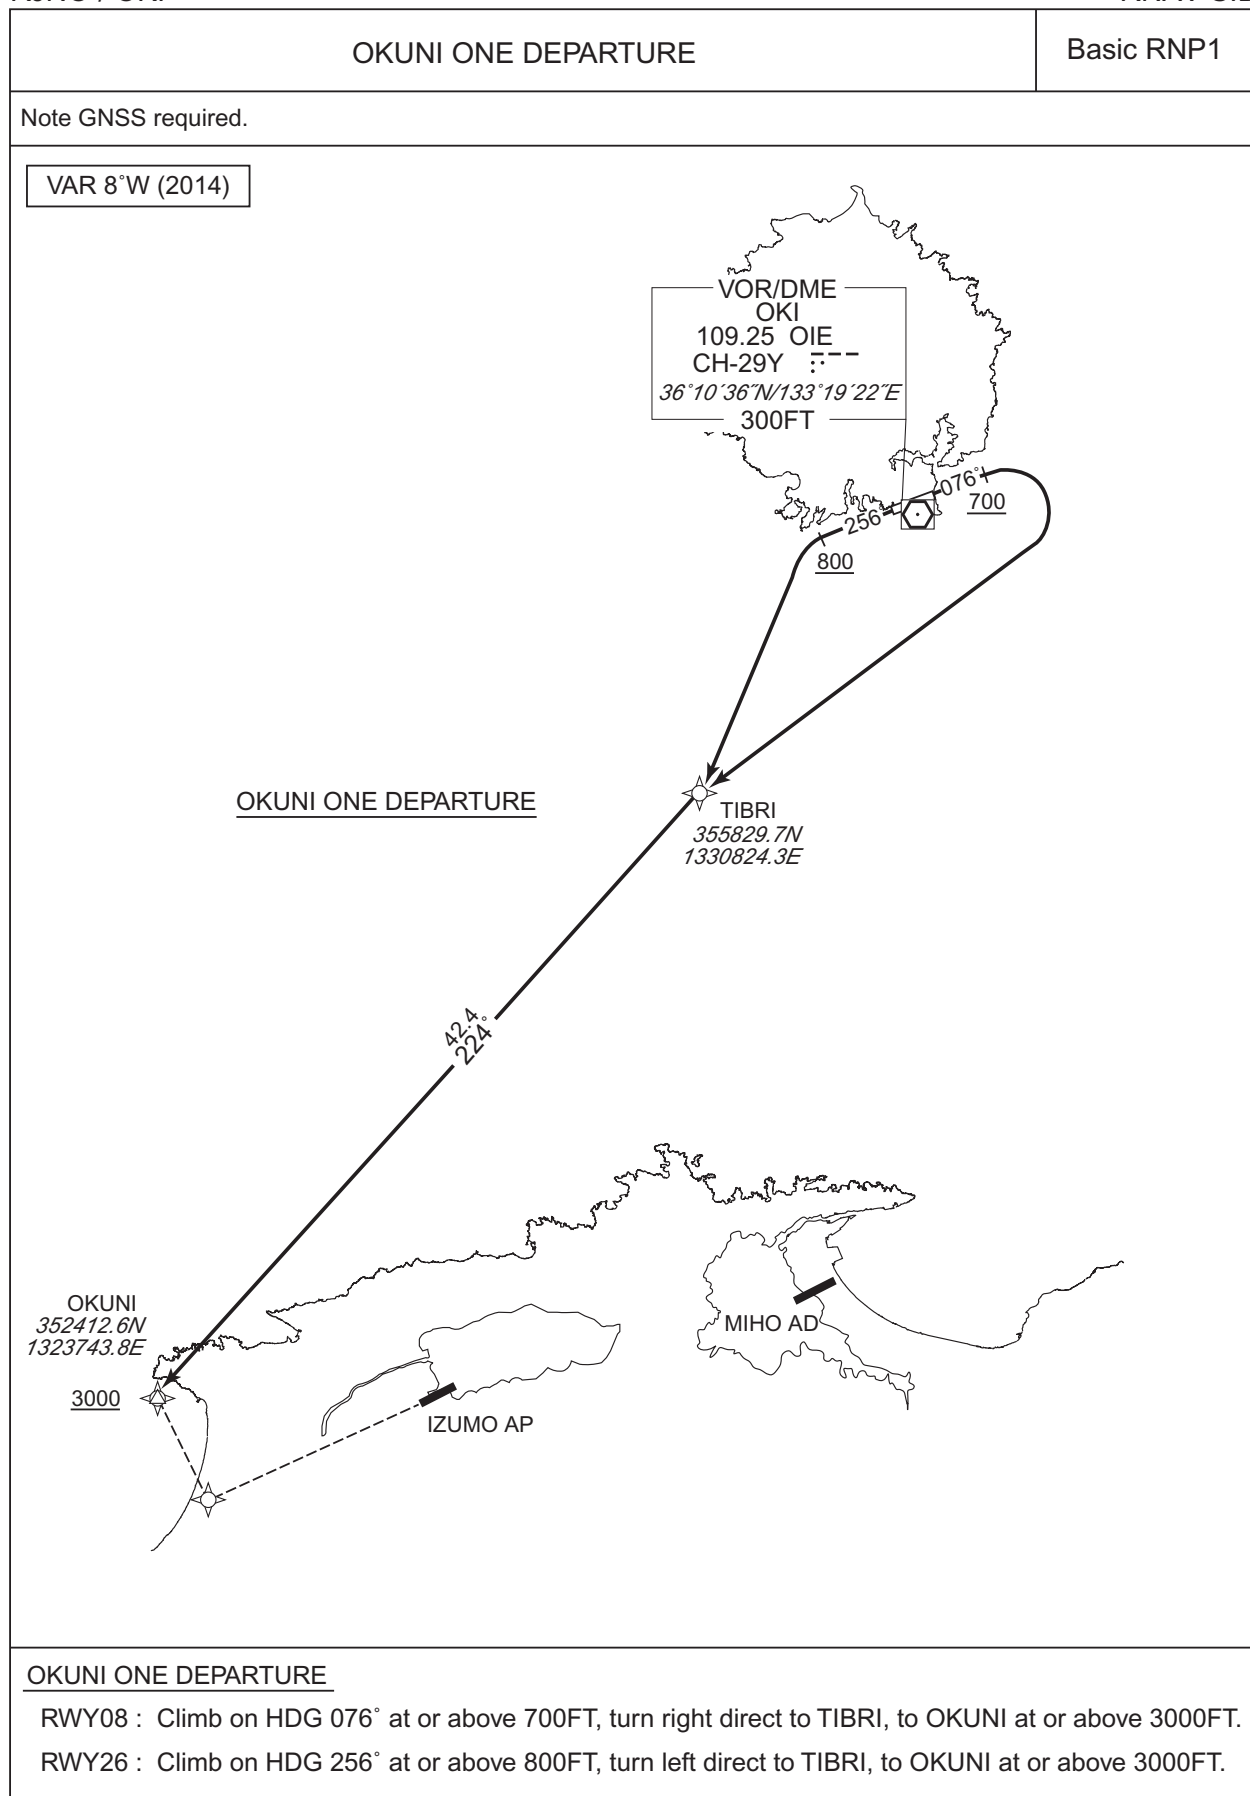

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

OKUNI ONE DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	076 (067.8)	-7.9	—	—	+700	—	—	Basic RNP1
002	DF	TIBRI	—	—	-7.9	—	R	—	—	—	Basic RNP1
003	TF	OKUNI	—	224 (216.2)	-7.9	42.4	—	+3000	—	—	Basic RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	256 (247.8)	-7.9	—	—	+800	—	—	Basic RNP1
002	DF	TIBRI	—	—	-7.9	—	L	—	—	—	Basic RNP1
003	TF	OKUNI	—	224 (216.2)	-7.9	42.4	—	+3000	—	—	Basic RNP1

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

TSUNO ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2014)

VOR/DME
OKI
109.25 OIE
CH-29Y ---
36°10'36"N/133°19'22"E
300FT

256
800
076
700

TSUNO ONE DEPARTURE

DISEN
354635.7N
1333125.4E

11000

40.7
139°

TSUNO
351958.4N
1340912.3E

TSUNO ONE DEPARTURE

RWY08 : Climb on HDG 076° at or above 700FT, turn right direct to DISEN at or above 11000FT, to TSUNO.

RWY26 : Climb on HDG 256° at or above 800FT, turn left direct to DISEN at or above 11000FT, to TSUNO.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

TSUNO ONE DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	076 (067.8)	-7.9	—	—	+700	—	—	Basic RNP1
002	DF	DISEN	—	—	-7.9	—	R	+11000	—	—	Basic RNP1
003	TF	TSUNO	—	139 (130.7)	-7.9	40.7	—	—	—	—	Basic RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	256 (247.8)	-7.9	—	—	+800	—	—	Basic RNP1
002	DF	DISEN	—	—	-7.9	—	L	+11000	—	—	Basic RNP1
003	TF	TSUNO	—	139 (130.7)	-7.9	40.7	—	—	—	—	Basic RNP1

INTENTIONALLY LEFT BLANK